2-2399610-2 - ACTIVE

PowerTube | PowerTube HVP-HD 1400

TE Internal #: 2-2399610-2 Bus Bar-to-Wire, 2 Position, 47 mm [1.85 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1400

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > PowerTube HVP-HD 1400 90° Headers





Connector System: Bus Bar-to-Wire

Number of Positions: 2

Number of Rows: 1

Centerline (Pitch): 47 mm [1.85 in]

Header Type: Fully Shrouded

All PowerTube HVP-HD 1400 90° Headers (90)

Features

Product Type Features

Connector Shape	Circular Bus Bar-to-Wire			
Connector System				
Header Type	Fully Shrouded			
Sealable	Yes			
Connector & Contact Terminates To	Bus Bar			
Connector Product Type	Connector Assembly			
Configuration Features				
Configuration Features				
Configuration Features Number of Positions	2			
	2			
Number of Positions				
Number of Positions Number of Rows				

Bus Bar-to-Wire, 2 Position, 47 mm [1.85 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1400



Body Features

Connector & Keying Code	C/D				
Primary Product Color	Blue, Purple				
Contact Features					
Mating Pin Diameter	14 mm[.55 in]				
Contact Mating Area Plating Material	Silver (Ag)				
Contact Type	Pin				
Termination Features					
Termination Method to PCB	Through Hole - Screw				
Mechanical Attachment					
Mating Alignment Type	Polarization				
PCB Mount Retention	Without				
Connector Mounting Type	Panel Mount				
Mating Alignment	With				
Housing Features					
Centerline (Pitch)	47 mm[1.85 in]				

Usage Conditions

Operating Temperature (Max)	140 °C[284 °F]				
Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]				
Operation/Application					
Circuit Application	Power				
Industry Standards					
IP Rating	IP6K9K				
UL Flammability Rating	UL 94V-0				
Packaging Features					
Packaging Method	Container				
Product Compliance For compliance documentation, visit the product page on TE.com>					
EU RoHS Directive 2011/65/EU	Compliant				
EU ELV Directive 2000/53/EC	Compliant				

Bus Bar-to-Wire, 2 Position, 47 mm [1.85 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1400



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.71% in 26925197352) Decamethylcyclopentasiloxane (D5) (2.41% in 30409226519) Octamethylcyclotetrasiloxane (D4) (10% in Component Part) Article Safe Usage Statements:
	Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Bus Bar-to-Wire, 2 Position, 47 mm [1.85 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1400







PowerTube HVP-HD 1400 Plug Pre-Assemblies


HD1400 PRE-ASSY SU-BEAM, NO TPA, FINGER

Also in the Series | PowerTube HVP-HD 1400

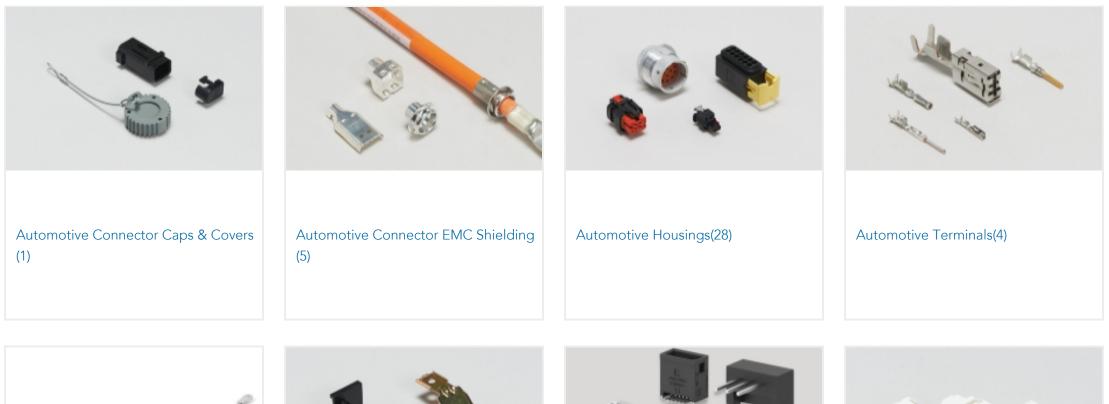









Connector Caps & Covers(1)	Other Automotive Connector	PCB Headers & Receptacles(189)	Rectangular Power Connectors(189)
	Accessories(29)		

Customers Also Bought



Bus Bar-to-Wire, 2 Position, 47 mm [1.85 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1400



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2399610-2_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2399610-2_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2399610-2_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages HIVONEX CONNECTORS & CHARGING SOLUTIONS

English

Product Specifications Application Specification

English