

CT Hybrid Drawer TE Internal #: 2-292185-8 Connector Assembly, Receptacle, Wire-to-Board, 32 Position, 2 mm [.079 in] Centerline, Crimp/IDC, 2 Row, Black, CT Hybrid Drawer View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: Connector Assembly

Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 32

Centerline (Pitch): 2 mm [.079 in ]

### Features

### Product Type Features

Connector Product TypeConnector AssemblyConnector & Housing TypeReceptacleConnector SystemWire-to-Board

Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Number of Power Positions	4	
Number of Signal Positions	28	
Number of Positions	32	
Number of Rows	2	
Electrical Characteristics		
Operating Voltage	250 V	
Body Features		
Drawer Style	Miniature Power	
Primary Product Color	Black	
Contact Features		
Contact Retention Within Housing	With	
Contact Base Material	Copper Alloy	

**C** For support call+1 800 522 6752

Connector Assembly, Receptacle, Wire-to-Board, 32 Position, 2 mm [.079 in] Centerline, Crimp/IDC, 2 Row, Black, CT Hybrid Drawer



Contact Current Rating (Max)	15 A
Termination Features	
Termination Method to Wire & Cable	Crimp/IDC
Mechanical Attachment	
Panel Mount Feature Type	Mounting Ears
Panel Mount Feature	With
PCB Mount Retention Type	Mounting Ears
PCB Mount Alignment	With
PCB Mount Retention	With
Mating Retention	Without
Connector Mounting Type	Panel Mount
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	2 mm[.079 in]
Dimensions	
Connector Width	29.95 mm[1.18 in]
Connector Height	19 mm[.748 in]
Connector Length	76 mm[2.99 in]
Row-to-Row Spacing	8.05 mm[.317 in]
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tray, Tray
Packaging Quantity	40

### Product Compliance

For compliance documentation, visit the product page on TE.com>

Connector Assembly, Receptacle, Wire-to-Board, 32 Position, 2 mm [.079 in] Centerline, Crimp/IDC, 2 Row, Black, CT Hybrid Drawer




EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




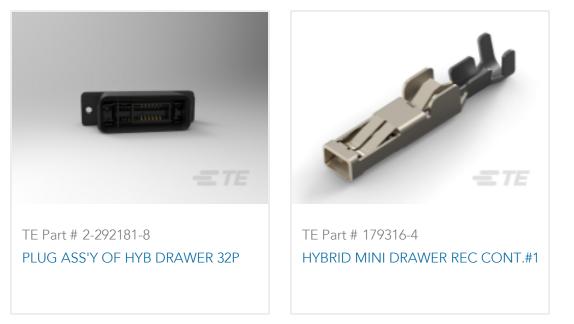


Also in the Series | CT Hybrid Drawer

Connector Assembly, Receptacle, Wire-to-Board, 32 Position, 2 mm [.079 in] Centerline, Crimp/IDC, 2 Row, Black, CT Hybrid Drawer



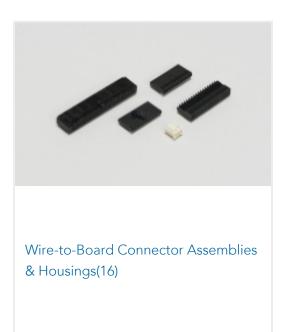

# Customers Also Bought

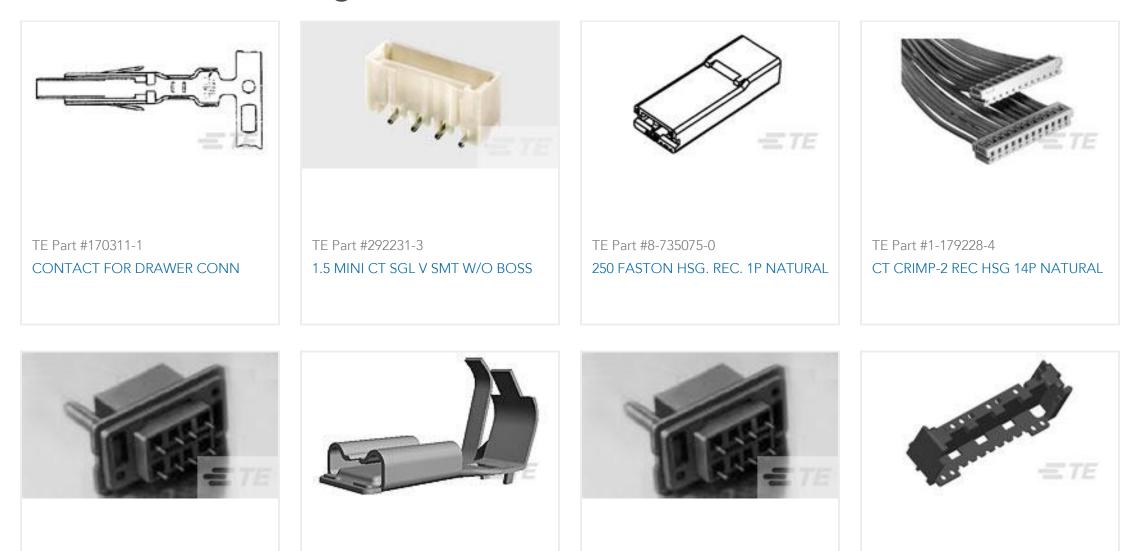

TE Part #172624-3

TE Part #175019-1

TE Part #5172625-3

TE Part #1-179472-8

DRAWER CONN. MALE 24P 4.3MM	187 PL EX FLAG REC. 22-16AWG PTBR	DRAWER CONN. FEMALE ASSY 24P	CT DBL ROW HOLDER, CRIMP, 18P, NA
TE Part #170312-1 POWER CONN.CONTACT	TE Part #1478380-1 SEALED DOUBLE BREAK MICROSWITCH		

### Documents

Product Drawings REC ASS'Y OF HYB DRAWER 32P

English

### **CAD** Files

Customer View Model

ENG\_CVM\_2-292185-8\_B2.3d\_igs.zip

English

Customer View Model

**C** For support call+1 800 522 6752

Connector Assembly, Receptacle, Wire-to-Board, 32 Position, 2 mm [.079 in] Centerline, Crimp/IDC, 2 Row, Black, CT Hybrid Drawer



ENG\_CVM\_2-292185-8\_B2.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_2-292185-8\_B2.2d\_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages POWER\_CONNECTORS\_CATALOG\_SEC02\_CABLE\_MOUNTED

English

Low Power Drawer Connectors QRG

English

**Product Specifications** 

**Application Specification** 

English

Crimping Hybrid Mini Drawer Connector Power Line Contact

English