
# 2-320571-2 - ACTIVE

#### PIDG

TE Internal #: 2-320571-2 Closed Ring Tongue Terminal, 22 – 16 AWG, 1/4 / M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated

#### View on TE.com >

Terminals & Splices > Ring Terminals > PIDG Ring Tongue Terminals

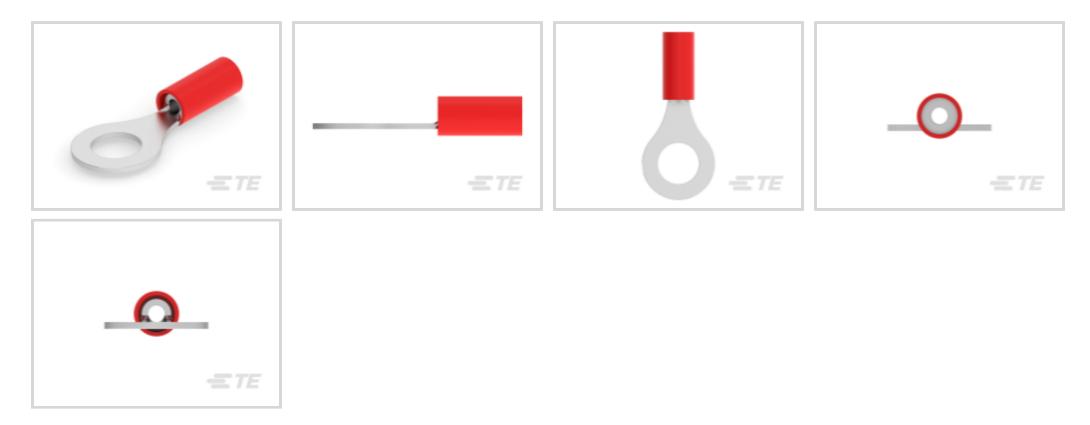

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 509 – 3260 CMA

Stud Size: 1/4, M6

All PIDG Ring Tongue Terminals (410)



#### Features

#### **Product Type Features**

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	1/4, M6
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Electrical Characteristics	
Voltage Rating	300 V
Body Features	
Product Weight	1.458 g
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight

Closed Ring Tongue Terminal, 22 – 16 AWG, 1/4 / M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated



Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	509 – 3260 CMA
Stud Diameter	6.35 mm[.25 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	27.38 mm[1.078 in]
Compatible Insulation Diameter (Max)	3.18 mm[.125 in]
Compatible Insulation Diameter Range	2.03 – 3.18 mm[.08 – .125 in]
Usage Conditions	
Insulation Option	Partially Insulated
Operation/Application	
Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin
Industry Standards	
Government Qualified Terminal	No

### Packaging Features

Packaging Quantity	5000
Packaging Method	Tape Mounted
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Closed Ring Tongue Terminal, 22 – 16 AWG, 1/4 / M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated




Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

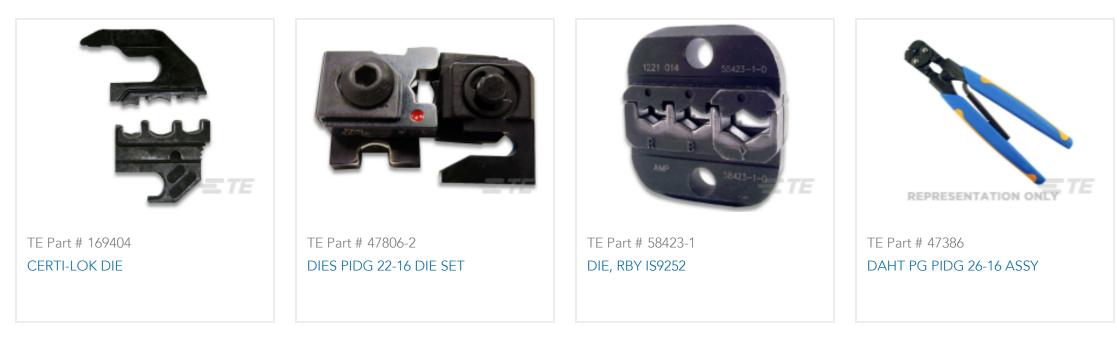








### Also in the Series **PIDG**




Closed Ring Tongue Terminal, 22 – 16 AWG, 1/4 / M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated



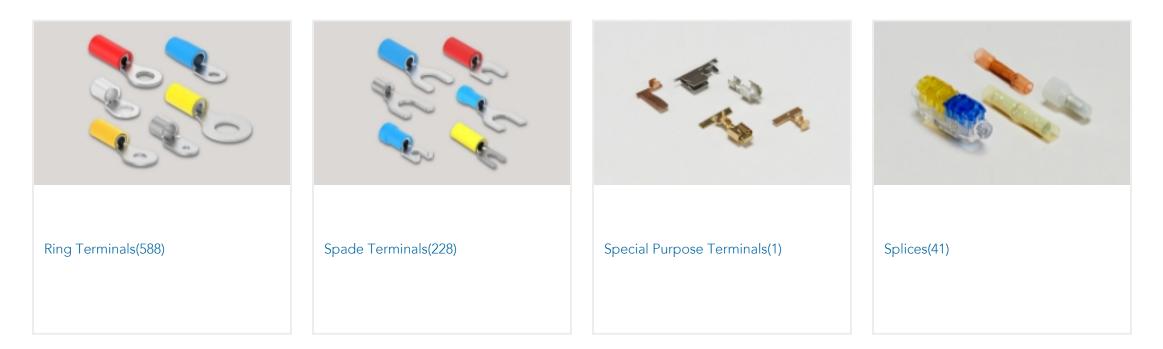

## Customers Also Bought

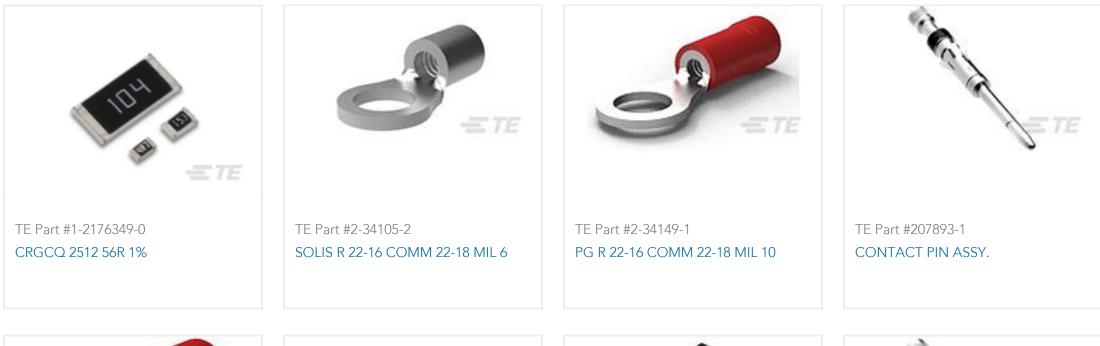



TERMINAL R PG 8 10

SHORT POINT CONT 30 DPLX STMPD

PRCSA1-20F-BB0BW, POWER ROCKER CONTACT SOC. ASSY.



### Documents

Product Drawings PIDG R 22-16 COMM 22-18MIL 1/4

English

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-320571-2\_AE.2d\_dxf.zip

Closed Ring Tongue Terminal, 22 – 16 AWG, 1/4 / M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated



English

Customer View Model ENG\_CVM\_CVM\_2-320571-2\_AE.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-320571-2\_AE.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals UL Report

English