



PIDG

TE Internal #: 2-323975-3
Butt Splice, 24 – 20 AWG, .2 – .6 mm² Wire, Serrated, .32 – 1.29 kcmil, 320 – 1290 CMA, Copper, Natural, 26.29 mm [1.035 in] Length, PIDG

[View on TE.com >](#)

Terminals & Splices > Splices > PIDG Butt Splices



Splice Type: **Butt Splice**
Wire Size: **.2 – .6 mm²**
Sealable: **No**
Splice Features: **Serrated**

[All PIDG Butt Splices \(25\)](#)

Features

Product Type Features

Splice Accessory Type	Splice
Splice Type	Butt Splice
Sealable	No
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Body Features

Product Weight	.855 g
Insulation Material	Nylon
Splice Features	Serrated
Primary Product Color	Natural

Contact Features

Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Closed



Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Wire Size	.32 – 1.29 kcmil
Compatible Insulation Diameter Range	2.54 mm[.1 in]
Product Length	26.29 mm[1.035 in]

Usage Conditions

Insulation Option	Fully Insulated
-------------------	-----------------

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Packaging Features

Packaging Quantity	2500
Packaging Method	Tape Mounted

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

REPRESENTATION ONLY

TE Part # 47907-1
DAHT PIDG 24-20 ASSY

Also in the Series | PIDG

Compression Connectors(17)

Crimp Wire Pins, Tabs & Ferrules(41)

Knife Disconnects(11)

Quick Disconnects(38)

Ring Terminals(588)

Spade Terminals(228)

Special Purpose Terminals(1)

Splices(41)


Customers Also Bought

TE Part #926305-7
4P UNIV M-N-L CAP

TE Part #42563-8
250 FASTON FLAG REC 12-10 AWG
TPBZ

TE Part #7-215083-6
MICRO-MATCH MOW.06P

TE Part #1SNA114533R0000
EBS8A.G

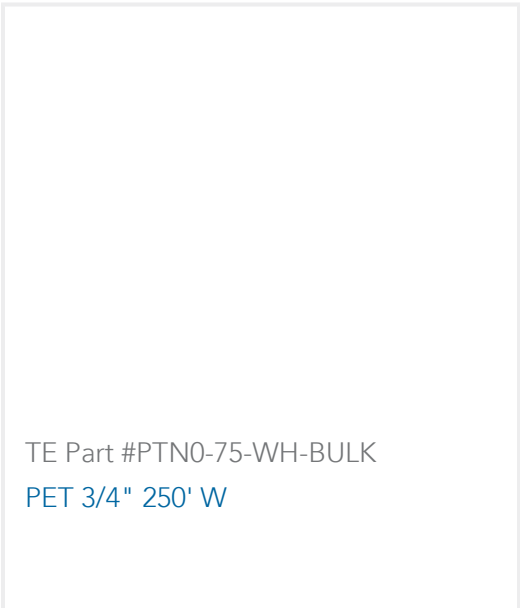

Documents

Product Drawings

SPLICE, BUTT, PIDG, 24-20, T&R

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_2-323975-3_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_2-323975-3_M.3d_igs.zip

English

Customer View Model

ENG_CVM_2-323975-3_M.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.