



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .32 – .82 mm²

Mating Tab Width: 4.75 mm [.187 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

|                   |           |
|-------------------|-----------|
| Terminal Features | Wire Stop |
| Insertion Force   | Normal    |

Configuration Features

|                                   |               |
|-----------------------------------|---------------|
| Compatible With Wire & Cable Type | Discrete Wire |
| Connection Capacity               | Single        |

Electrical Characteristics

|                |       |
|----------------|-------|
| Voltage Rating | 600 V |
|----------------|-------|

Body Features

|                     |       |
|---------------------|-------|
| Insulation Material | Nylon |
|---------------------|-------|

Contact Features

|                                |                  |
|--------------------------------|------------------|
| Quick Disconnect Terminal Type | Receptacle       |
| Mating Tab Width               | 4.75 mm[.187 in] |
| Mating Tab Thickness           | .81 mm[.032 in]  |
| Terminal Orientation           | Straight         |



|                           |         |
|---------------------------|---------|
| Contact Base Material     | Brass   |
| Terminal Plating Material | Tin     |
| Crimp Type                | F-Crimp |
| Barrel Type               | Closed  |

Termination Features

|                       |              |
|-----------------------|--------------|
| Product Terminates To | Wire & Cable |
|-----------------------|--------------|

Mechanical Attachment

|                         |        |
|-------------------------|--------|
| Wire Insulation Support | With   |
| Mating Retention Type   | Dimple |

Dimensions

|                                      |                   |
|--------------------------------------|-------------------|
| Product Length                       | 21.75 mm[.855 in] |
| Compatible Insulation Diameter Range | 3.43 mm[.135 in]  |
| Terminal Material Thickness          | .41 mm[.016 in]   |
| Wire Size                            | .32 – .82 mm²     |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Insulation Option           | Fully Insulated            |
| Operating Temperature Range | -40 – 110 °C[-40 – 230 °F] |

Industry Standards

|                                           |          |
|-------------------------------------------|----------|
| Compatible With Agency/Standards Products | UL       |
| UL Flammability Rating                    | UL 94V-2 |

Packaging Features

|                    |            |
|--------------------|------------|
| Packaging Quantity | 2700       |
| Packaging Method   | Strip/Reel |

Other

|              |     |
|--------------|-----|
| Barrel Color | Red |
|--------------|-----|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                         |
|-----------------------------------------------|-----------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                               |
| EU ELV Directive 2000/53/EC                   | Compliant                               |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006        |                                         |



Current ECHA Candidate List: JAN 2025  
(247)  
Candidate List Declared Against: JAN 2025  
(247)  
Does not contain REACH SVHC

|                           |                                                                                     |
|---------------------------|-------------------------------------------------------------------------------------|
| Halogen Content           | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability                                        |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 58078-3  
TETRA CRIMP FRAME W/O DIES

TE Part # 7-2151034-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-1760

TE Part # 58628-2  
PROCIMP DIESET 26-14 ULTRAFAST

TE Part # 90390-3  
DIES ULTRA-FAST FASTON 22-18 DIE SET

TE Part # 2151034-2  
OCEAN\_2.0\_APPLICATOR-S-1760-SSA

TE Part # 58628-1  
PROCIMP T&D 26-14 ULTRAFAST

Also in the Series | [Ultra-Fast 187](#)




Quick Disconnects(47)


Customers Also Bought



TE Part #2-520183-2  
ULTRA-FAST 250 ASY REC 22-18 TPBR

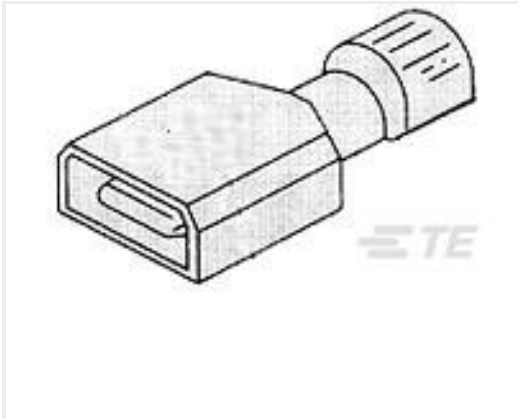

TE Part #2-521104-2  
ULTRA-FAST 187 ASY REC 22-18 TPBR

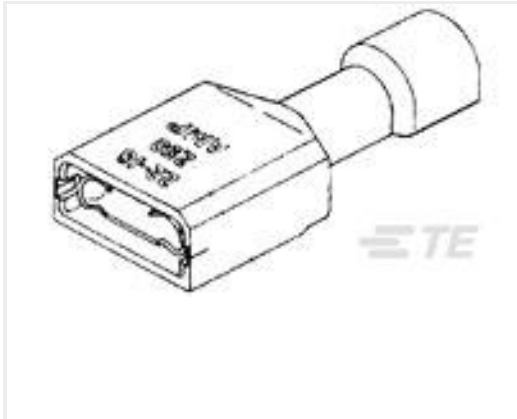

TE Part #3-520140-2  
ULTRA-FAST 250 ASY REC 16-14 AWG  
TPBR



TE Part #5-2176612-3  
EP 3W (SS) 150R 5%




TE Part #61944-2  
250 FASTON REC 18-14 AWG TPBR



TE Part #CB8769-000  
VERSAFIT-3/8R-0-60IN



TE Part #1742089-2  
187 FASTON,FLAG,REC.,18-  
14OR2X18AWG,TPBR

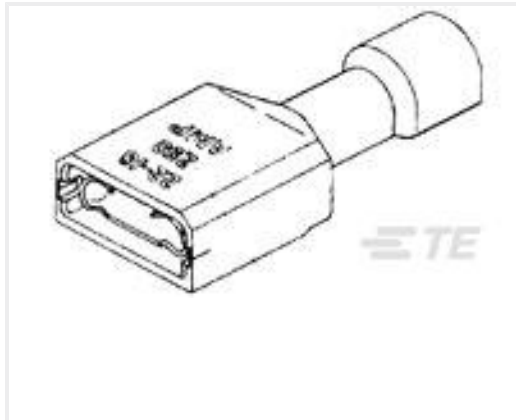

TE Part #3-520276-2  
ULTRA-FAST 187 ASY REC 16-14 AWG  
TPBR



TE Part #3-2299282-2  
POD-LOK 250 STR. AWG 18-14 PTPBR  
GF



TE Part #34839  
RING TERMINAL 18-14 AWG BR

Documents

Product Drawings

ULTRA-FAST 187 ASY REC 22-18 TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-520193-2\_W.2d\_dxf.zip



English

Customer View Model

[ENG\\_CVM\\_CVM\\_2-520193-2\\_W.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2-520193-2\\_W.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Ultra-Fast and Ultra Fast Plus](#)

English

Product Specifications

[Application Specification](#)

English

[Application Specification](#)

English

Agency Approvals

[UL](#)

English