
2-966067-2 <

TE Internal #: 2-966067-2 Ferrule, 10 AWG, 5 – 6 mm² Wire, 10382 CMA, Closed Barrel, Tin Plating, 20 mm [.787 in] Length, Bag, Discrete Wire, Stranded Wire, Partially Insulated

View on TE.com >



Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

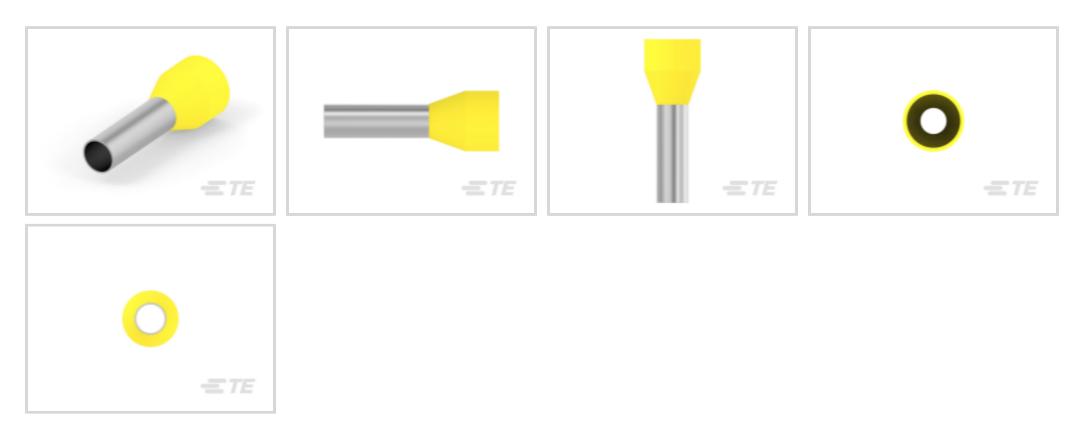

Crimp Wire Terminal Type: Ferrule

Compatible Insulation Diameter Range: 6.2 mm [.244 in]

Wire Size: 10382 CMA

Features

Product Type Features

Sealable

Compatible With Discrete Wire Type	Stranded				
Configuration Features					
Compatible With Wire & Cable Type	Discrete Wire				
Body Features					
Primary Product Color	Yellow				
Contact Features					
Contact Mating Area Length	12 mm[.468 in]				
Crimp Wire Terminal Type	Ferrule				
Barrel Type	Closed				
Terminal Plating Material	Tin				
Terminal Orientation	Straight				
Mechanical Attachment					
Wire Insulation Support	Without				
Dimensions					

2-966067-2

Ferrule, 10 AWG, 5 – 6 mm² Wire, 10382 CMA, Closed Barrel, Tin Plating, 20 mm [.787 in] Length, Bag, Discrete Wire, Stranded Wire, Partially Insulated



Strip Length	14 mm[.551 in]			
2-Wire Size	10 AWG			
Compatible Insulation Diameter Range	6.2 mm[.244 in]			
Wire Size	10382 CMA			
Barrel Inside Diameter	6.3 mm[.25 in]			
Terminal Material Thickness	.2 mm[.007 in]			
Overall Product Length	20 mm[.787 in]			
Usage Conditions				
Insulation Option	Partially Insulated			
Packaging Features				
Packaging Quantity	100			
Packaging Method	Bag			
Product Compliance				
en la la construction de la entre				
For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant			

EU ELV Directive 2000/53/EC

China RoHS 2 Directive MIIT Order No 32 2016

Out of Scope

No Restricted Materials Above Threshold

China Roms z Directive Milli Order No 32, 2010	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

2-966067-2


Ferrule, 10 AWG, 5 – 6 mm² Wire, 10382 CMA, Closed Barrel, Tin Plating, 20 mm [.787 in] Length, Bag, Discrete Wire, Stranded Wire, Partially Insulated



Compatible Parts



Customers Also Bought

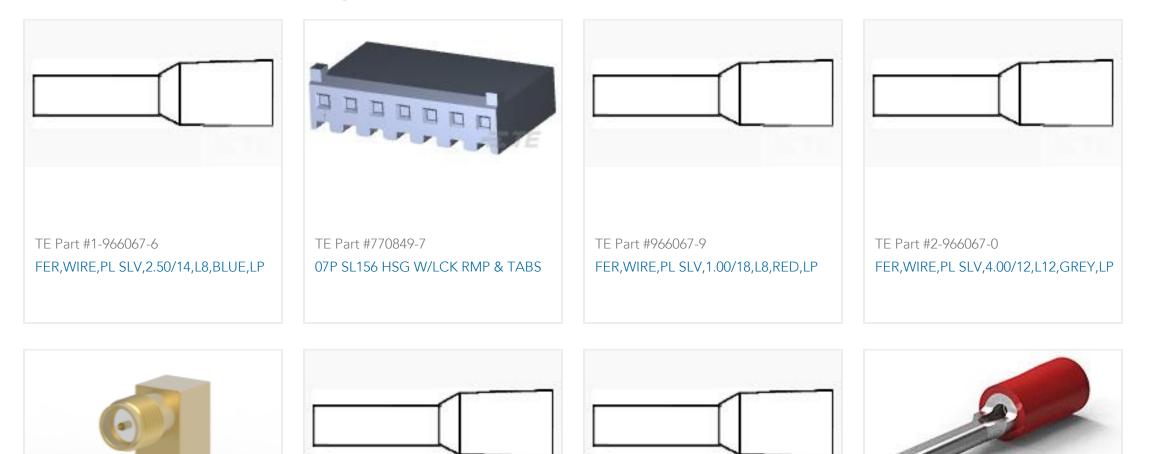

= TE			
TE Part #2016504-1 RP-SMA RA THROUGH HOLE PCB MOUNT JACK	TE Part #1-966067-7 FER,WIRE,PL SLV,2.50/14,L12,BLUE,LP	TE Part #966067-5 FER,WIRE,PL SLV,.75/18,L8,GREY,LP	TE Part #165167 PG WIRE PIN 22-16



Documents

Product Drawings FER,WIRE,PL SLV,6.00/10,L12,YELLOW,LP

English

CAD Files

3D PDF

English

C For support call+1 800 522 6752

2-966067-2

Ferrule, 10 AWG, 5 – 6 mm² Wire, 10382 CMA, Closed Barrel, Tin Plating, 20 mm [.787 in] Length, Bag, Discrete Wire, Stranded Wire, Partially Insulated



Customer View Model ENG_CVM_2-966067-2_B1.2d_dxf.zip

English

Customer View Model

ENG_CVM_2-966067-2_B1.3d_igs.zip

English

Customer View Model

ENG_CVM_2-966067-2_B1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2-966067-2_B1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-966067-2_B1.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-966067-2_B1.3d_igs.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Datasheets & Catalog Pages BUCHANAN TERMINAL BLOCKS CATALOG - EUROSTYLE TERMINAL BLOCKS

English

Wire Ferrules

English

WIRE END FERRULES

English

Agency Approvals CSA Certificate

English