




TE Internal #: 2-966292-4
Ferrule, 11 AWG, 4 mm² Wire, 8234 CMA, Closed Barrel, Tin
Plating, 17 mm [.67 in] Length, Loose Piece, Discrete Wire,
Stranded Wire
[View on TE.com >](#)

Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

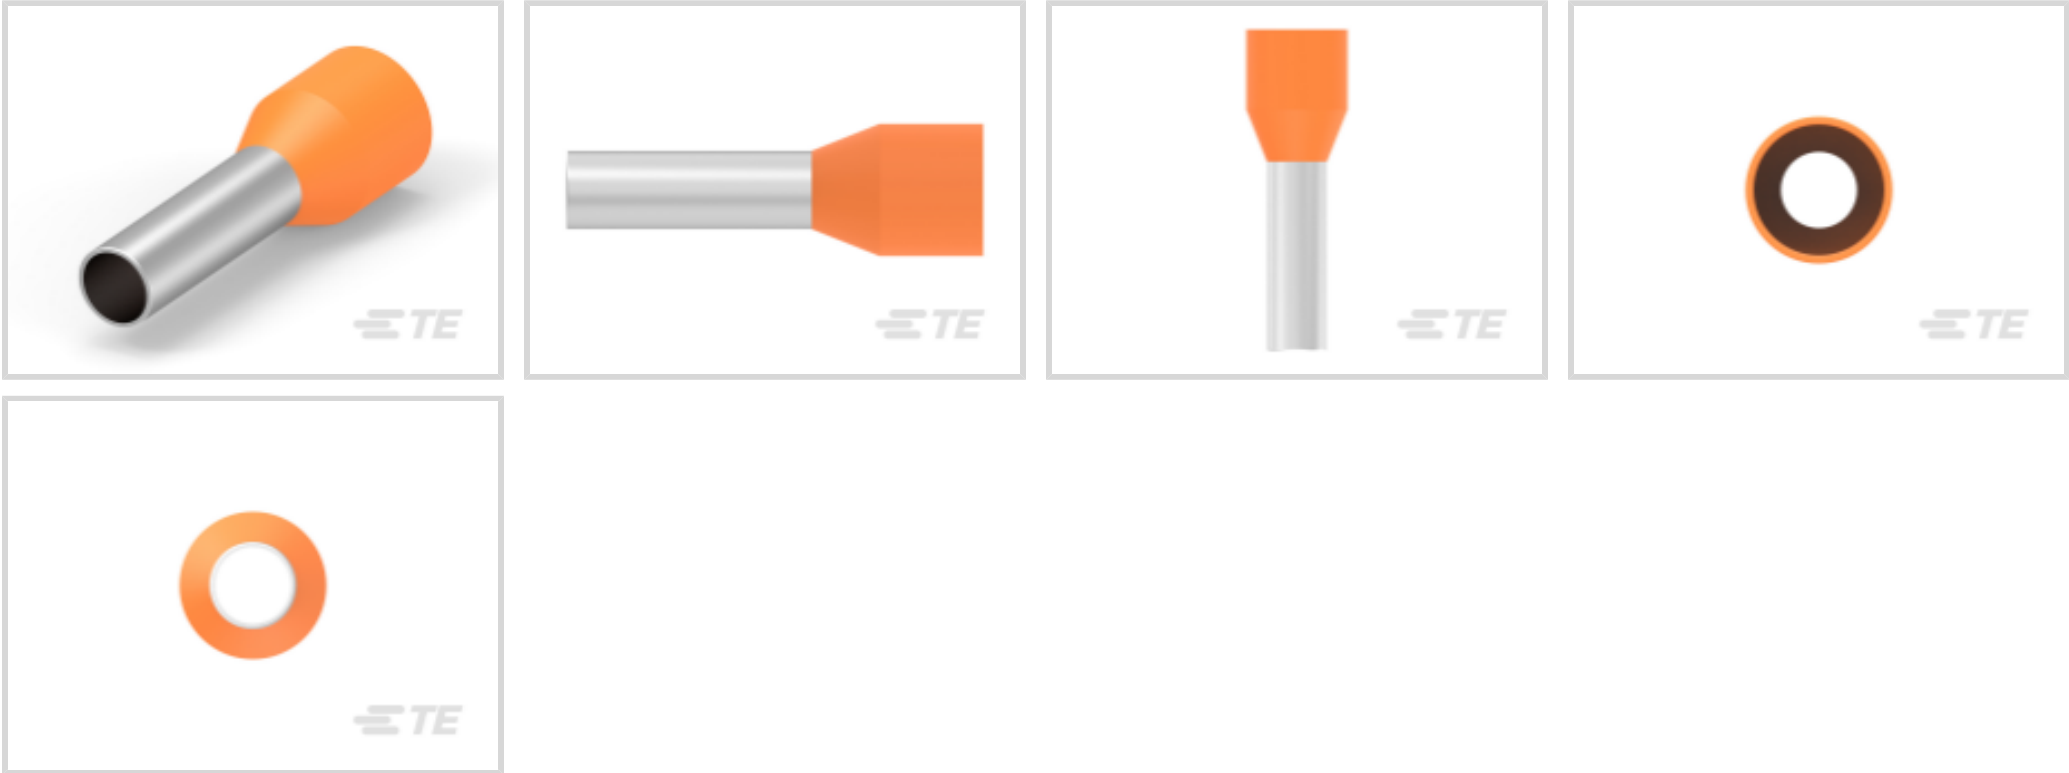

Crimp Wire Terminal Type: **Ferrule**
Compatible Insulation Diameter Range: 4.7 mm [.185 in]
Wire Size: **8234 CMA**

Features

Product Type Features

Sealable	No
Compatible With Discrete Wire Type	Stranded

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Body Features

Primary Product Color	Orange
-----------------------	--------

Contact Features

Contact Mating Area Length	10 mm[.39 in]
Crimp Wire Terminal Type	Ferrule
Barrel Type	Closed
Terminal Plating Material	Tin
Terminal Orientation	Straight

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

--	--



Strip Length	11 mm[.433 in]
2-Wire Size	11 AWG
Compatible Insulation Diameter Range	4.7 mm[.185 in]
Wire Size	8234 CMA
Barrel Inside Diameter	4.8 mm[.19 in]
Terminal Material Thickness	.2 mm[.007 in]
Overall Product Length	17 mm[.67 in]

Usage Conditions

Insulation Option	Partially Insulated
-------------------	---------------------

Packaging Features

Packaging Quantity	500
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts




TE Part # 2-1579001-3
CSE10-AE22 CRIMP HEAD




TE Part # 539660-1
ADERENDHUELSEN (Ferrule) Crimp Tool


Customers Also Bought




TE Part #66505-4
HD 20 DF SOCKET PLTD

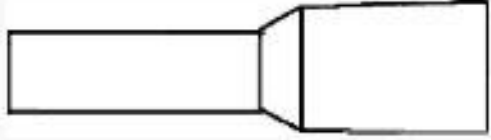


TE Part #1-966067-8
FER,WIRE,PL SLV,2.50/14,L18,BLUE,LP

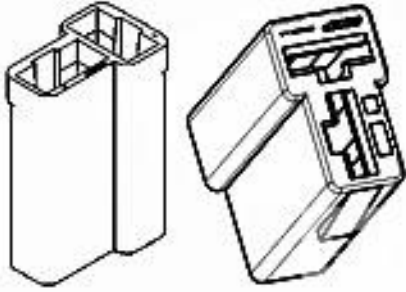


TE Part #180907-5
FF 250 REC HSG 2P NYLON BLACK

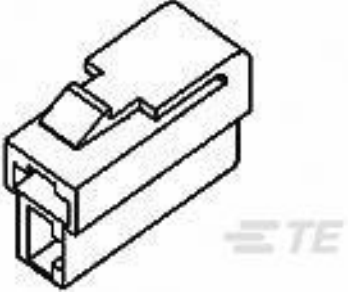


TE Part #172130-2
FF 250 REC HSG 2P NYLON BLCAK




TE Part #66104-9
III+ SKT,24-20,30AU/FL,STRIP




TE Part #1534027-1
MQS VERRIEGLUNG F2P




TE Part #1-1534113-1
2POS MQS REC



TE Part #3-1447221-5
S/S REC CONTACT ASSY, AU, 0.3

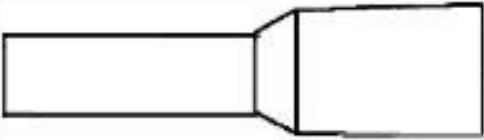

TE Part #966067-2
FER,WIRE,PL SLV,.50/20,L8,WHITE,LP

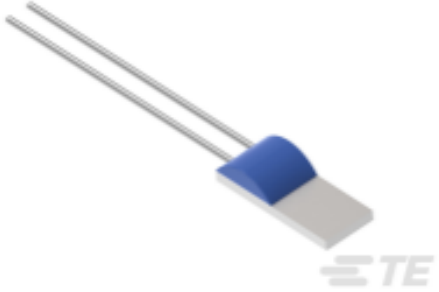

TE Part #NB-PTCO-170
Pt1000, 2.0x5.0, Class A, PTFD102A1A0

Documents

Product Drawings
FER,WIRE,PL SLV,4.00/12,L10,ORANGE,LP
English

CAD Files
Customer View Model
ENG_CVM_CVM_2-966292-4_O.3d_igs.zip

2-966292-4

Ferrule, 11 AWG, 4 mm² Wire, 8234 CMA, Closed Barrel, Tin Plating, 17 mm [.67 in]
Length, Loose Piece, Discrete Wire, Stranded Wire



English

Customer View Model

[ENG_CVM_2-966292-4_A1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_2-966292-4_A1.2d_dxf.zip](#)

English

[3D PDF](#)

English

Customer View Model

[ENG_CVM_2-966292-4_A1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Wire Ferrules

English

[WIRE END FERRULES](#)

English