




Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Cluster Blocks

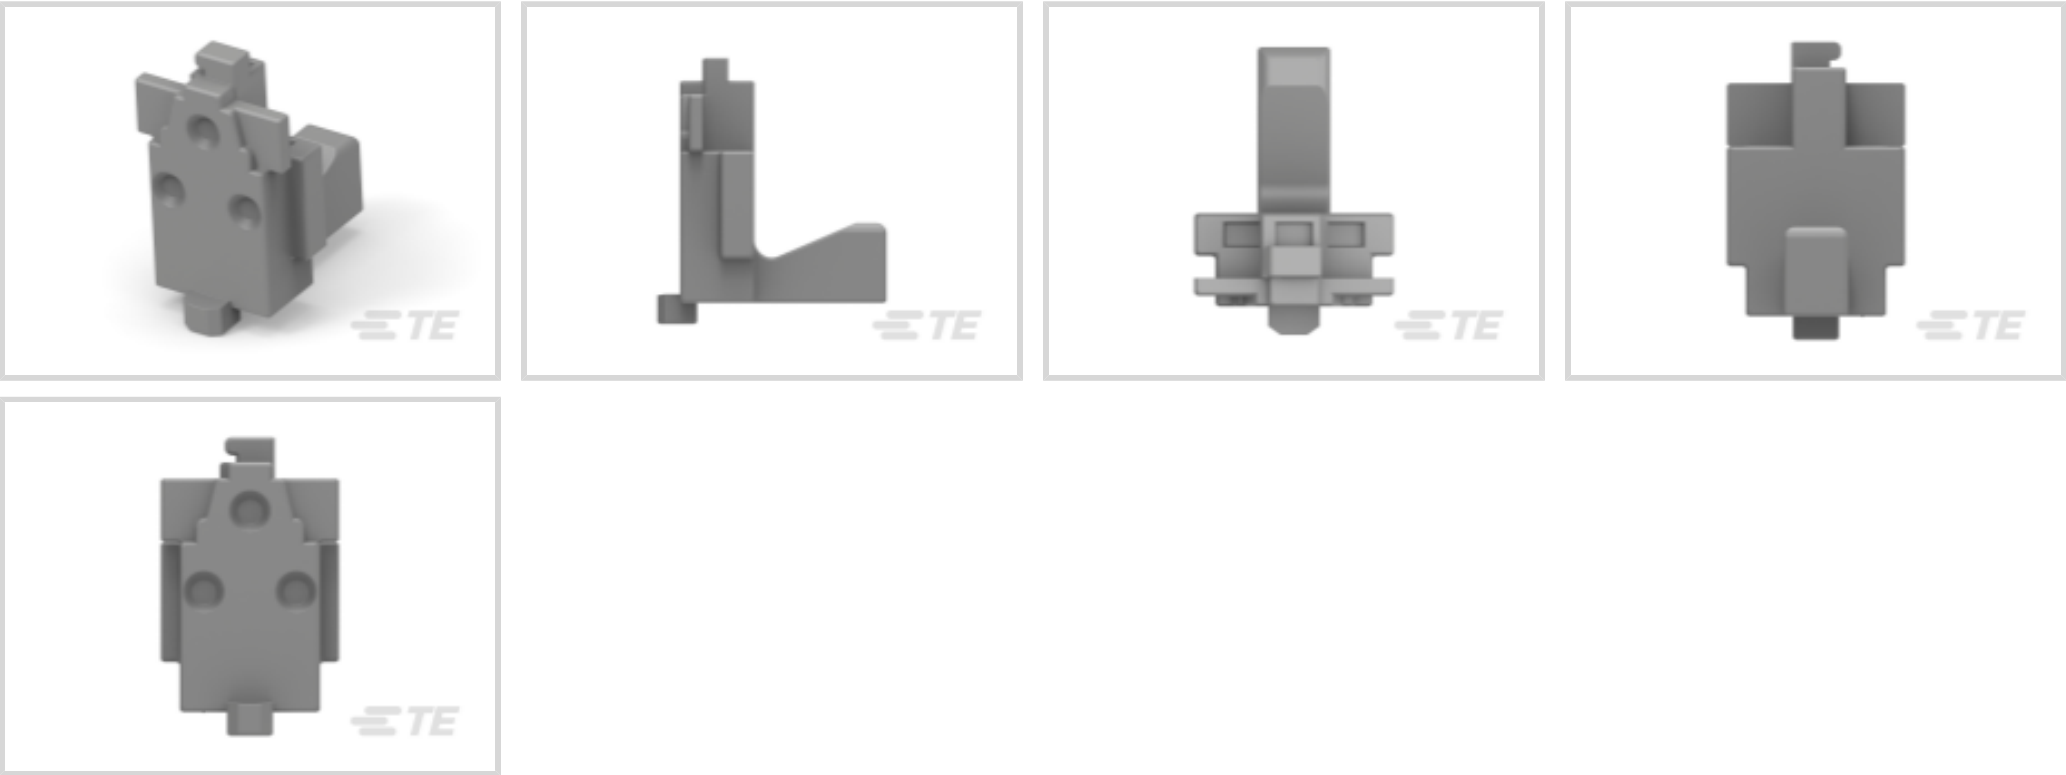

Number of Circuits: 3

Primary Product Material: PBT GF

Wire Size: .5 – 1.42 mm²

Operating Temperature Range: -40 – 105 °C [-40 – 221 °F]

Features

Product Type Features

Compatible With Discrete Wire Type	Lead Wire
------------------------------------	-----------

Configuration Features

Number of Circuits	3
--------------------	---

Body Features

Primary Product Color	Gray
Primary Product Material	PBT GF

Contact Features

Mating Pin Diameter	2.29 mm[.09 in]
---------------------	-----------------

Dimensions

Product Length	31.4 mm[1.23 in]
Wire Size	.5 – 1.42 mm ²

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------



Packaging Features

Packaging Method	Bag
Packaging Quantity	300

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 5-170063-2
CLUSTER REC



TE Part # 171370-4
CLUSTER BLOCK HSG GWT




TE Part # 5-170063-3
CLUSTER BLOCK REC W/BACK UP



TE Part # 170063-2
CLUSTER PIN REC

Customers Also Bought

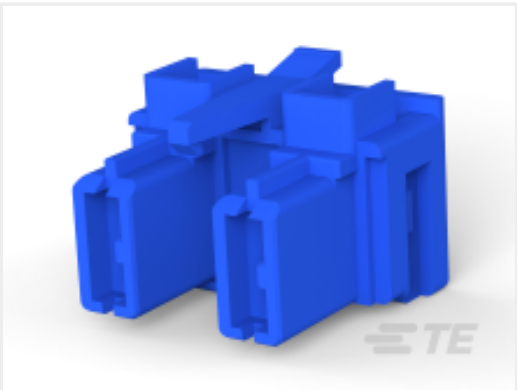

TE Part #1743165-8
250 HSG. PL EX FLAG REC. 12mm 2P
BLUE




TE Part #936663-1
PL 187 REC 20-16 AWG 0.3 X 14.0
PTPBR



TE Part #1-1565081-1
GIC 3.5W 2P PLUG(GWT) NAT



TE Part #2005543-5
BLOWER MOTOR 3P DBL YEL

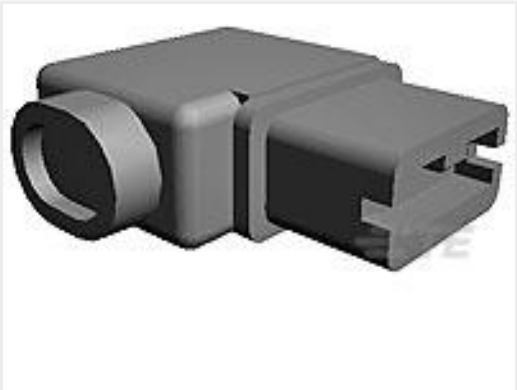


TE Part #1-176497-7
PL EX SLEEVE 250 FLAG RED 6/6
NYLON



TE Part #2005877-2
WIRE SEAL FOR MINI MTDL



TE Part #1743206-2
POSITIVE LOCK 250 RECEPTACLE

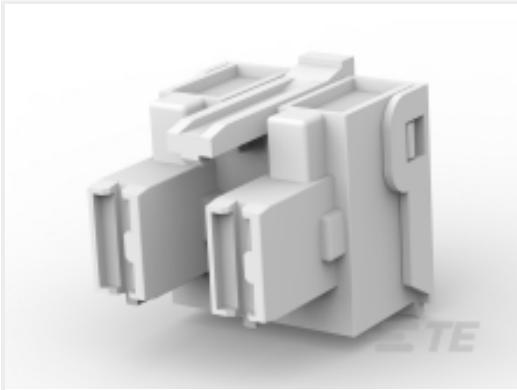

TE Part #1743206-1
POSITIVE LOCK 250 RECEPTACLE



TE Part #2005542-1
BLOWER MOTOR 3P PLUG



TE Part #3-2005820-9
CLUSTER BLOCK 3P SLIM HSG(GWT)

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2005820-1_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2005820-1_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2005820-1_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Magnet Wire Terminals & Splices

English

Product Specifications



Application Specification

English

Agency Approvals

UL Report

English