




Connectors > Connector Accessories > Connector Seals & Cavity Plugs

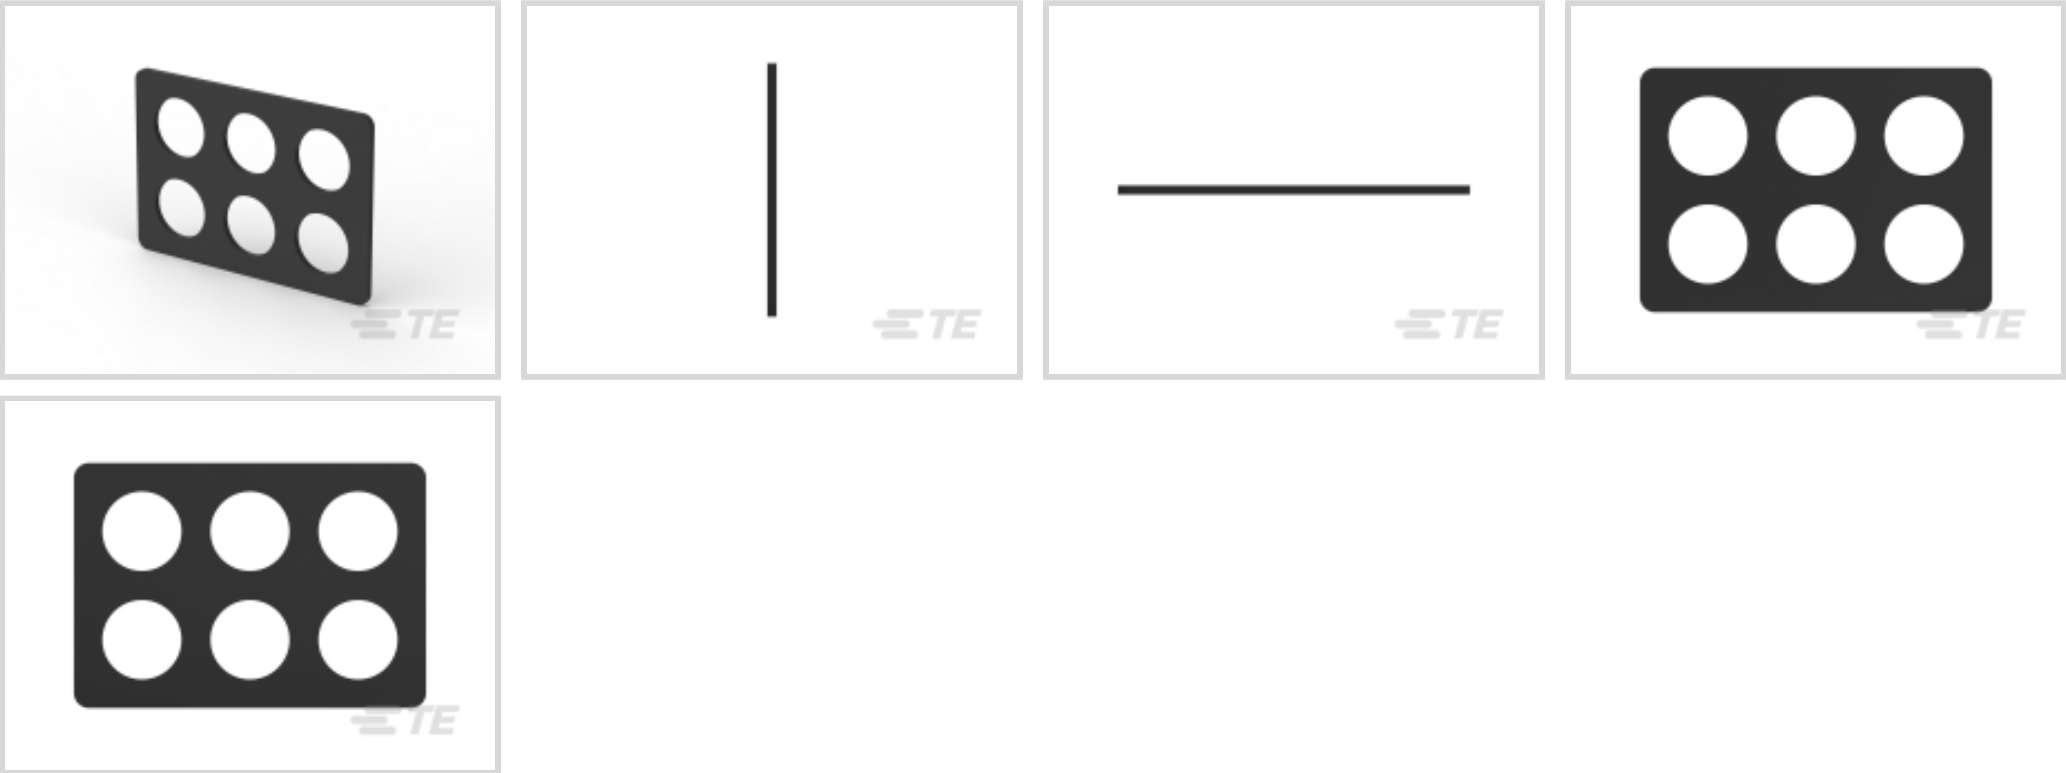

Connector Seal & Plug Type: **Spacer**
Operating Temperature Range: **-55 – 105 °C [-67 – 221 °F]**
Primary Product Color: **Black**
Primary Product Material: **Silicone Foam**
Operating Temperature (Max): **105 °C [221 °F]**

Features

Product Type Features

Connector Seal & Plug Type	Spacer
----------------------------	--------

Configuration Features

Number of Positions	6
---------------------	---

Body Features

Primary Product Color	Black
Primary Product Material	Silicone Foam

Housing Features

Centerline (Pitch)	6.35 mm[.250 in]
--------------------	------------------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operating Temperature (Max)	105 °C[221 °F]

Packaging Features

Packaging Method	Package
Packaging Quantity	1000



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2029383-1
06P UMNL-II FRONT2RR FOAM SPCR



TE Part # 794993-1
06P UMNL BLACK INTERFACE SEAL



TE Part # 794994-1
09P UMNL BLACK INTERFACE SEAL



TE Part # 2029268-1
06P UMNL WIRE SEAL IN-LINE





TE Part # 1-640415-0
UMNL KEYING PLUG V0



TE Part # 794992-1
03P UMNL BLACK INTERFACE SEAL




TE Part # 794991-1
02P UMNL BLACK INTERFACE SEAL



TE Part # 794785-1
04P UMNL INTERFACE SEAL



TE Part # 1-640415-1
UMNL KEYING PLUG V2 NATL

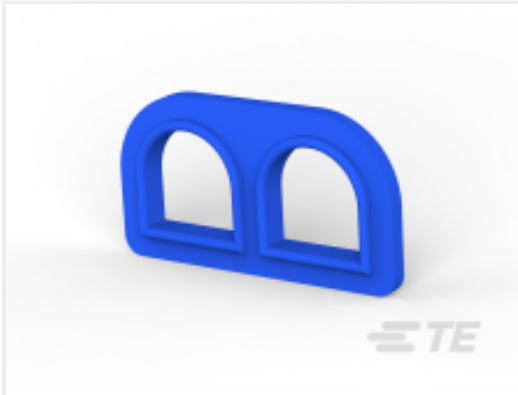

TE Part # 794269-1
02P UMNL INTERFACE SEAL

Also in the Series | Universal MATE-N-LOK



Circular Power Connectors(2)



Connector Caps & Covers(34)




Connector Seals & Cavity Plugs(27)



Connector Strain Relief(7)




Insertion & Extraction Tools(4)

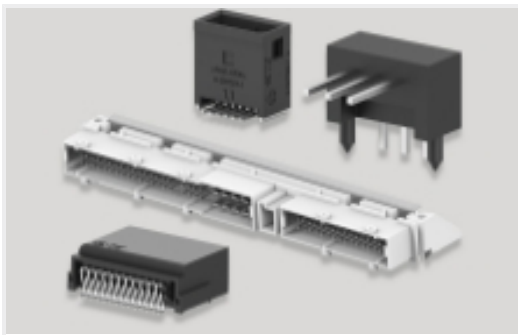

PCB Headers & Receptacles(286)



Rectangular Power Connectors(651)

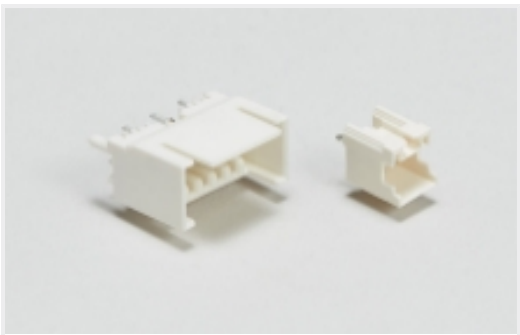

Wire-to-Board Headers & Receptacles (286)

Customers Also Bought



TE Part #770009-1
UMNL II PIN PTPBR



Documents

Product Drawings

06P UMNL-II TPA FOAM SPACER

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2029442-1_A_c-2029442-1-a.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2029442-1_A_c-2029442-1-a.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2029442-1_A_c-2029442-1-a.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English