



IMPACT

TE Internal #: 2057410-1
96 Position High Speed Backplane Connector, 6 Row, 16 Column,
PCB Mount Receptacle, Right Angle, Unshrouded, 1.9 mm [.075 in]
Centerline, IMPACT

[View on TE.com >](#)

Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors



Number of Positions: 96
Row-to-Row Spacing: 1.35 mm [.053 in]
Mating Alignment: With
Mating Alignment Type: Guide Slot
Number of Rows: 6

Features

Product Type Features

Signal Arrangement	Differential
Connector & Contact Terminates To	Printed Circuit Board
Connector System	Board-to-Board
PCB Connector Type	PCB Mount Receptacle
Shroud Style	Unshrouded

Configuration Features

Number of Pairs	32
Number of Ground Positions	32
Number of Signal Positions	64
Stackable	No
Number of Positions	96
Number of Rows	6
Number of Columns	16
PCB Mount Orientation	Right Angle



Guide Location	Right
Electrical Characteristics	
Operating Voltage	30 VDC
Impedance	100 Ω
Signal Characteristics	
Data Rate	20 – 25 Gb/s
Number of Differential Pairs per Column	2
Body Features	
Primary Product Color	Black
Contact Features	
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	.762 μm[30 μin]
PCB Contact Termination Area Plating Material Thickness	1.27 μm[50 μin]
Contact Shape & Form	Dual Beam
Contact Layout	Inline
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Type	Socket
Contact Current Rating (Max)	.75 A
Termination Features	
Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	1.2 mm[.047 in]
Mechanical Attachment	
Guide Hardware	With
PCB Mount Retention	With
Mating Retention	Without
PCB Mount Retention Type	Action/Compliant Tail & Screw
PCB Mount Alignment Type	Locating Posts
Mating Alignment	With



Mating Alignment Type	Guide Slot
Connector Mounting Type	Board Mount

Housing Features

Number of Shrouded Sides	0
End Wall Location	None
Housing Material	LCP GF
Centerline (Pitch)	1.9 mm[.075 in]

Dimensions

PCB Thickness (Recommended)	1.6 mm
Connector Width	20.1 mm[.791 in]
PCB Hole Diameter	.39 mm[.015 in]
Connector Height	10.9 mm[.429 in]
Connector Length	38 mm[1.496 in]
Row-to-Row Spacing	1.35 mm[.053 in]

Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL E28476

Packaging Features

Packaging Method	Box & Tube, Tube
------------------	------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247)



	Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 2057748-1

[IMP100S,H,V2P16C,UG,OEW39,4.5](#)

Also in the Series | IMPACT

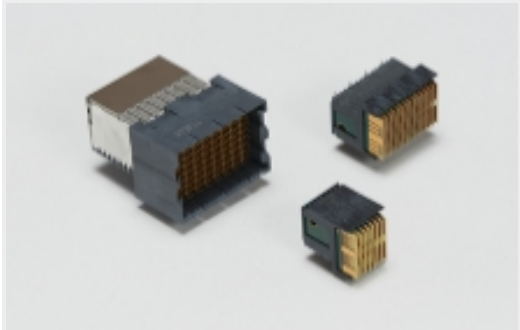

[High Speed Backplane Connectors](#)

(149)

Customers Also Bought



TE Part #2383436-1
HD CE VERTICAL TH :2X3HP-2X2LP-2X12S

TE Part #2057409-1
IMP100S,R,RA2P16C,LG,39

TE Part #4-2176331-4
CRGP 2512 39K 1%

TE Part #CAT-P851-T1B
PCB Power Relay: 40 Amp, Monostable

TE Part #2267079-3
TMS1T3B1M1QE

TE Part #3-2176331-9
CRGP 2512 15K 1%

TE Part #1419106-7
27E220=SOCKET,KH,8,PL,PHEN,BLK

TE Part #2383433-1
HD CE RA 2X3HP-2X2LP-2X12S

TE Part #2302014-1
ZSFP+ 1X8 CAGE ASSY, PRESS-FIT, LP, HS

Documents

Product Drawings
IMP100S,R,RA2P16C,RG,39
English

CAD Files
Customer View Model
ENG_CVM_CVM_2057410-1_A.2d_dxf.zip
English
3D PDF
3D
Customer View Model
ENG_CVM_CVM_2057410-1_A.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_2057410-1_A.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages



7-1773458-1_IMPACT_BACKPLANE_CONNECTOR_SYSTEM_CATALOG

English

Product Specifications

Application Specification

English

Application Specification

English

Agency Approvals

Agency Approval Document

English