




IMPACT

TE Internal #: 2057741-1  
96 Position High Speed Backplane Connector, 6 Row, 16 Column,  
PCB Mount Header, Vertical, Partially Shrouded, 1.9 mm [.075 in]  
Centerline, IMPACT

[View on TE.com >](#)

Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

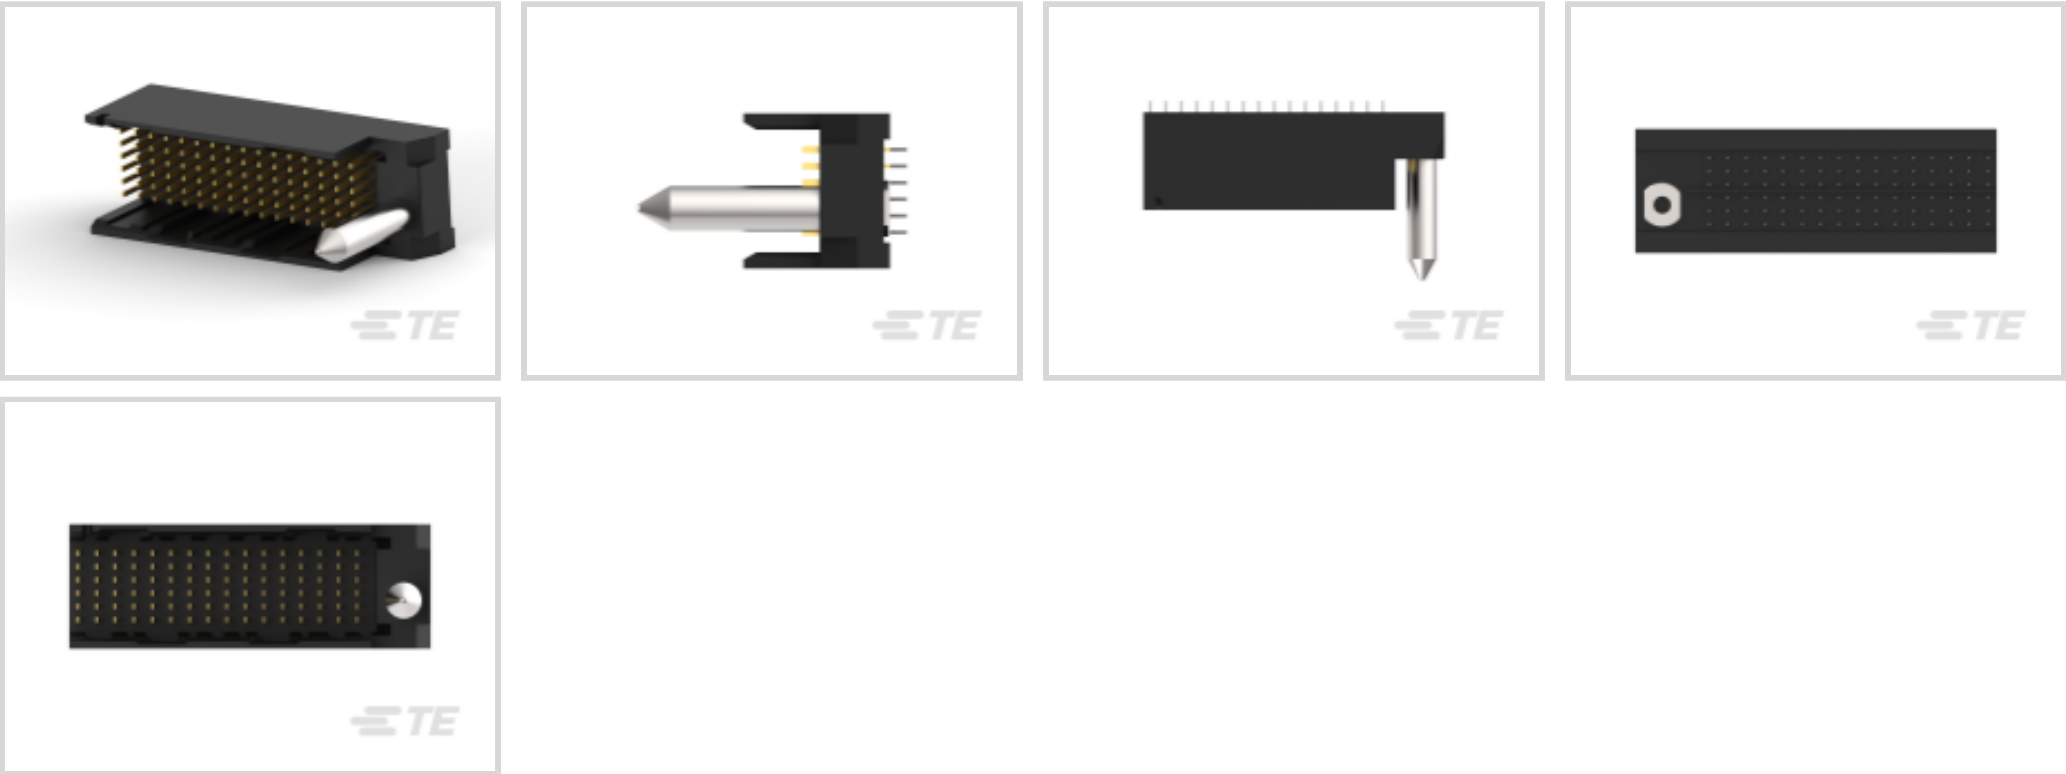

Number of Positions: 96  
Row-to-Row Spacing: 1.35 mm [ .053 in ]  
Mating Alignment: With  
Mating Alignment Type: Guide Pin  
Number of Rows: 6

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Signal Arrangement                | Differential          |
| Connector & Contact Terminates To | Printed Circuit Board |
| Connector System                  | Board-to-Board        |
| PCB Connector Type                | PCB Mount Header      |
| Shroud Style                      | Partially Shrouded    |

Configuration Features

|                            |          |
|----------------------------|----------|
| Number of Pairs            | 32       |
| Number of Ground Positions | 32       |
| Number of Signal Positions | 64       |
| Stackable                  | No       |
| Number of Positions        | 96       |
| Number of Rows             | 6        |
| Number of Columns          | 16       |
| PCB Mount Orientation      | Vertical |



|   |                               |
|---|-------------------------------|
| Guide Location  | Right                         |
| Electrical Characteristics                              |                               |
| Operating Voltage                                       | 30 VDC                        |
| Signal Characteristics                                  |                               |
| Data Rate   | 25 Gb/s                       |
| Number of Differential Pairs per Column                 | 2                             |
| Body Features   |                               |
| Primary Product Color                                   | Black                         |
| Contact Features  |                               |
| Contact Underplating Material                           | Nickel                        |
| Contact Underplating Material Thickness                 | 1.27 µm[50 µin]               |
| PCB Contact Termination Area Plating Material Finish    | Matte                         |
| Contact Mating Area Plating Material Thickness          | .76 µm[29.92 µin]             |
| PCB Contact Termination Area Plating Material Thickness | 1.27 µm[50 µin]               |
| Contact Shape & Form                                    | Dual Beam                     |
| Contact Layout  | Inline                        |
| Contact Mating Area Plating Material                    | Gold (Au)                     |
| Contact Mating Area Length                              | 4.5 mm[.177 in]               |
| Contact Base Material                                   | Copper Alloy                  |
| PCB Contact Termination Area Plating Material           | Tin                           |
| Contact Type  | Pin                           |
| Contact Current Rating (Max)                            | .75 A                         |
| Termination Features                                    |                               |
| Termination Method to PCB                               | Through Hole - Press-Fit      |
| Termination Post & Tail Length                          | 1.4 mm[.055 in]               |
| Mechanical Attachment                                   |                               |
| Guide Hardware  | With                          |
| PCB Mount Retention                                     | With                          |
| Mating Retention  | Without                       |
| PCB Mount Retention Type                                | Action/Compliant Tail & Screw |
| PCB Mount Alignment Type                                | Locating Posts                |
| Mating Alignment  | With                          |
|   |                               |



|                         |             |
|-------------------------|-------------|
| Mating Alignment Type   | Guide Pin   |
| Connector Mounting Type | Board Mount |

Housing Features

|                          |                 |
|--------------------------|-----------------|
| Number of Shrouded Sides | 2               |
| End Wall Location        | Open            |
| Housing Material         | LCP             |
| Centerline (Pitch)       | 1.9 mm[.075 in] |

Dimensions

|                             |                   |
|-----------------------------|-------------------|
| Connector Width             | 12.7 mm[.5 in]    |
| PCB Thickness (Recommended) | 1 mm[.039 in]     |
| PCB Hole Diameter           | .39 mm[.015 in]   |
| Connector Height            | 11.95 mm[.47 in]  |
| Connector Length            | 36.9 mm[1.453 in] |
| Row-to-Row Spacing          | 1.35 mm[.053 in]  |

Usage Conditions

|                             |                           |
|-----------------------------|---------------------------|
| Operating Temperature Range | -55 – 85 °C[-67 – 185 °F] |
|-----------------------------|---------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

|   |           |
|---|-----------|
| UL Flammability Rating                      | UL 94V-0  |
| Compatible With Approved Standards Products | UL E28476 |

Packaging Features

|                  |                     |
|------------------|---------------------|
| Packaging Method | Box & Tube, Package |
|------------------|---------------------|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|   |  |
|---|--|
| EU RoHS Directive 2011/65/EU                  | Compliant  |
| EU ELV Directive 2000/53/EC                   | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247) |



|                           |   |
|---------------------------|---|
|                           | Does not contain REACH SVHC   |
| Halogen Content           | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability  |

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2057411-1  
[IMP100S,R,RA2P16C,UG,39](#)

Also in the Series | IMPACT

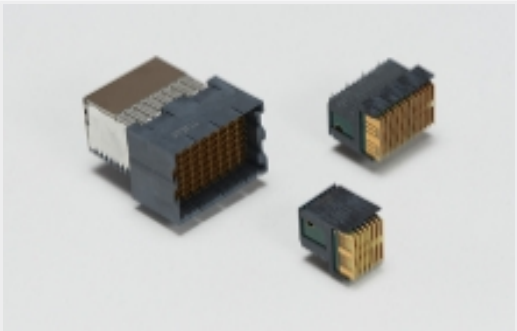

[High Speed Backplane Connectors](#)  
(149)

Customers Also Bought



TE Part #5749111-8  
100 50SR CABLE PLUG ASSY



TE Part #5-5223961-1  
TE UPM R/A Header 3P HC Power, LLL



TE Part #2057409-1  
IMP100S,R,RA2P16C,LG,39




TE Part #5-5223955-2  
TE UPM Ver Rec 3P HC Power Connector




TE Part #5535090-4  
ASSEMBLY,RECEPTACLE,EUROCARD, T



TE Part #9-1393211-9  
T92S7A12-240

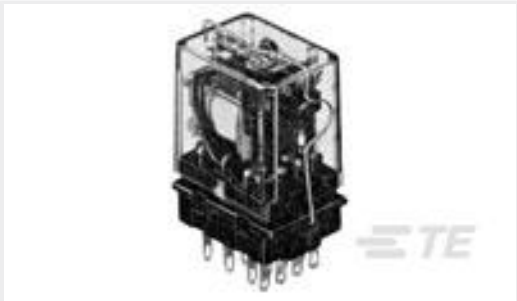


TE Part #1419111-2  
20C217=SPRING,HOLD-DOWN,KH,.,03

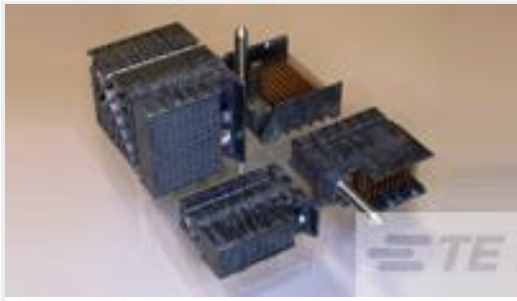

TE Part #2057410-1  
IMP100S,R,RA2P16C,RG,39



TE Part #T4041017031-000  
M8.FMLE.PNLREAR.3POS.STR PCB



TE Part #1419106-7  
27E220=SOCKET,KH,8,PL,PHEN,BLK

Documents

Product Drawings

IMP100S,H,V2P16C,RG,OEW39,4.5

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2057741-1\_A\_c-2057741-1-a.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2057741-1\_A\_c-2057741-1-a.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2057741-1\_A\_c-2057741-1-a.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



7-1773458-1\_IMPACT\_BACKPLANE\_CONNECTOR\_SYSTEM\_CATALOG

English

Product Specifications

Application Specification

English

Agency Approvals

Agency Approval Document

English