



Connectors > Connector Accessories > Connector Hardware



Connector Hardware Accessory Type: **Keying Plug**
Operating Temperature (Max): **130 °C [266 °F]**
Operating Temperature Range: **-55 – 130 °C [-67 – 266 °F]**
Hardware Accessory Function: **Coding & Keying**

Features

Product Type Features

Connector Hardware Accessory Type	Keying Plug
Hardware Accessory Function	Coding & Keying

Usage Conditions

Operating Temperature (Max)	130 °C[266 °F]
Operating Temperature Range	-55 – 130 °C[-67 – 266 °F]

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Package
Packaging Quantity	1

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 208404-1
PLUG,10 POSN,IN-LINE METRIC

Customers Also Bought



TE Part #207305-1
24 POS SQ GRID METRIMATE-RCPT



TE Part #207020-1
METRIMATE RCPT 36 POS



TE Part #1579007-9
EXTRACTION TOOL



TE Part #1658642-1
HDP-20,PLUG,SIZE 1, 9 POSN,CLI



TE Part #66098-9
III+ PIN, 18-16, 30AU/FL, STRIP




TE Part #1-104257-1
12 MTE RCPT HSG SR LATCH .100



TE Part #1609112-3
10CE1 M0=F7804



TE Part #207088-1
METRIMATE, STR REL KIT, 24P

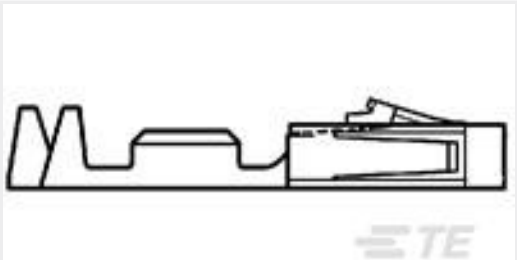

TE Part #1-104480-5
SHORT POINT RCP CONT LP



TE Part #1658644-1
HDP-20, RCPT, SIZE 2, 15 POSN, CL

Documents

Product Drawings

KEYING PLUG

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_207654-1_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_207654-1_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_207654-1_F.3d_stp.zip

English

3D PDF

English

Customer View Model

ENG_CVM_207654-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_207654-1_B.3d_stp.zip

English

Customer View Model

ENG_CVM_207654-1_B.2d_dxf.zip

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Application Specification

English

METRIMATE Self-Locking Connectors

Japanese

Application Specification

Japanese

Instruction Sheets

Instruction Sheet (U.S.)

English