2118310-1 - ACTIVE

TE Internal #: 2118310-1 PCB Antenna, Multi Band, Cat-M/NB-IoT / Cellular / Wi-Fi, Internal /Embedded Mount, Through-Hole/Tab Mount, Omnidirectional, 3 < 6 dBi Peak Gain

View on TE.com >

Antennas



Antenna Type: PCB Band Type: Multi Band Primary Application: Cat-M/NB-IoT, Cellular, Wi-Fi Wireless Application: Cat-M/NB-IoT, Cellular, ISM, Wi-Fi Mounting Location: Internal/Embedded

Features

Product Type Features



Antenna Product Type	Antenna
Configuration Features	
Antenna Style	PCB
Antenna Type	PCB
Band Type	Multi Band
Mounting Location	Internal/Embedded
Electrical Characteristics	
Impedance	50 Ω
Antenna Operation	Passive
VSWR (Max)	<3:1
Signal Characteristics	
Gain (Max)	3.5 dB
Frequency Category	698 – 2700
Peak Gain	3 < 6 dBi

PCB Antenna, Multi Band, Cat-M/NB-IoT / Cellular / Wi-Fi, Internal/Embedded Mount, Through-Hole/Tab Mount, Omnidirectional, 3 < 6 dBi Peak Gain



Body Features Product Weight Mechanical Attachment Polarization Mounting Type Dimensions

Product Width

Product Length

Product Height

Operation/Application

Wireless Standard

Directionality

Industry Standards

Primary Application

Wireless Application

Product Availability

2.55 g[.09 oz]

Linear

Through-Hole/Tab Mount

10.56 mm[.416 in]

74 mm[2.913 in]

1.57 mm[.062 in]

LTE, UMTS, US Dual, EU Triband & WCDMA

Omnidirectional

Cat-M/NB-IoT, Cellular, Wi-Fi

Cat-M/NB-IoT, Cellular, ISM, Wi-Fi

Applicable Region	Americas, EU, Global
Packaging Features	
Packaging Method	Bag & Box
Other	
Precision Level	Standard
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold:

PCB Antenna, Multi Band, Cat-M/NB-IoT / Cellular / Wi-Fi, Internal/Embedded Mount, Through-Hole/Tab Mount, Omnidirectional, 3 < 6 dBi Peak Gain



Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Hand solderable with lead free solder

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





TE Part # 2336713-2 SPRING FINGER 1.45H



TE Part # 2199248-4 Shield Finger, Loose Piece, Type A, 1.0 h



e, Type A, 1.0 TE Part # 2199248-5 TE A, 1.3H




TE Part # 1447009-5 SHIELD FINGER 0820 TYPE



PCB Antenna, Multi Band, Cat-M/NB-IoT / Cellular / Wi-Fi, Internal/Embedded Mount, Through-Hole/Tab Mount, Omnidirectional, 3 < 6 dBi Peak Gain



Customers Also Bought

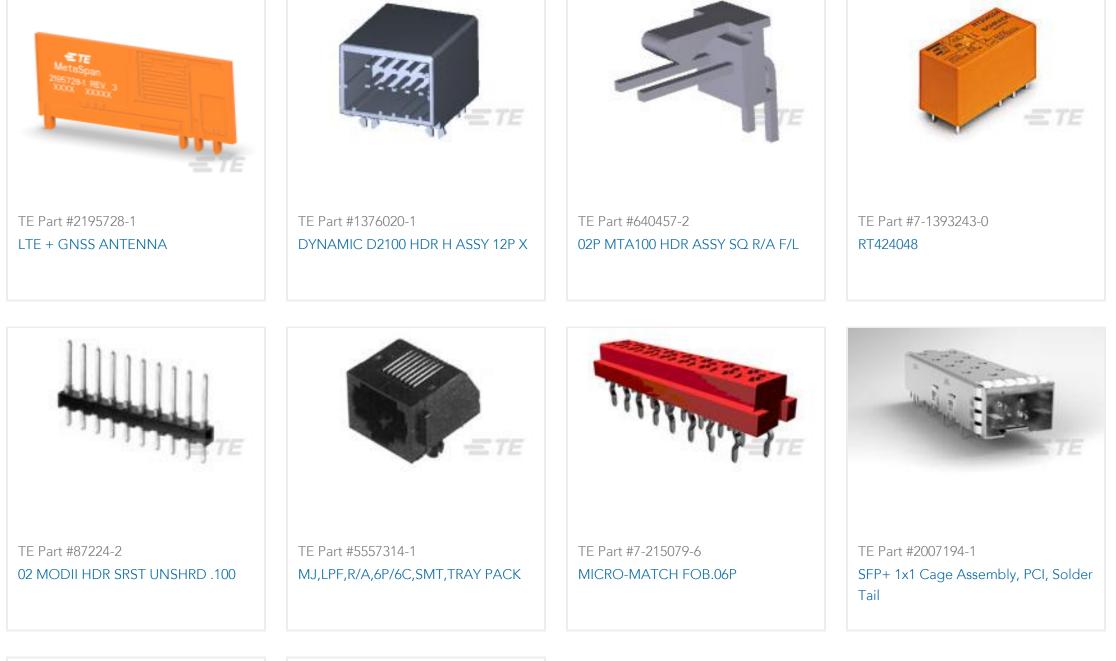



GDH04S04=DIP SWITCH

RN 0402 1K0 0.1% 10PPM 5K RL

Documents

Product Drawings

4G World Band, MetaSpan, Tab Mt. PCB

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_2118310-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2118310-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2118310-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

S For support call+1 800 522 6752

04/13/2025 10:08PM | Page 4

PCB Antenna, Multi Band, Cat-M/NB-IoT / Cellular / Wi-Fi, Internal/Embedded Mount, Through-Hole/Tab Mount, Omnidirectional, 3 < 6 dBi Peak Gain



Datasheets & Catalog Pages

Antenna Data Sheet 698-960, 1710-2170 & 2300-2700 MHz LTE/Cell Band Antenna

English

Product Specifications Product Specification

English