



Connectors > Docking Connectors



Docking Connector Style: **Receptacle**

Connector System: **Cable-to-Board**

Number of Positions: **40**

Centerline (Pitch): **.6 mm [.024 in]**

Number of Rows: **3**

Features

Product Type Features

Docking Connector Style	Receptacle
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	40
Number of Rows	3
Number of Signal Positions	40
Number of Power Positions	0
PCB Mount Orientation	Right Angle

Body Features

Shell Base Material	Stainless Steel
---------------------	-----------------

Contact Features

Contact Mating Area Plating Material	Gold (Au)
--------------------------------------	-----------



Contact Base Material	Copper Alloy
Contact Mating Area Plating Material Thickness	.38 µm
Number of Utility Contacts	0
Contact Current Rating (Max)	.5 A, 1 A

Termination Features

Termination Post & Tail Length	1.5 mm[.06 in]
Termination Method to PCB	Surface Mount, Through Hole - Solder

Mechanical Attachment

PCB Mount Alignment	With
PCB Mount Retention Type	Hold-Down Post
PCB Mount Retention	With
Connector Mounting Type	Board Mount

Housing Features

Housing Color	Black
Housing Material	Thermoplastic
Centerline (Pitch)	.6 mm[.024 in]

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Reel
Packaging Quantity	600

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2129261-1
PLUG ASSY 0.6mm CHAMP DOCKING



TE Part # 2129260-2
REC ASSY 0.6mm CHAMP DOCKING C


Also in the Series | CHAMP Docking Connectors



Connector Caps & Covers(27)




Connector Hardware(28)

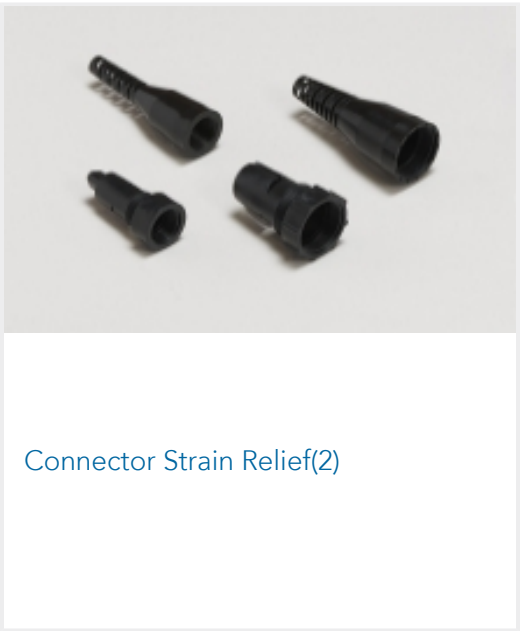

Connector Strain Relief(2)



Docking Connectors(19)

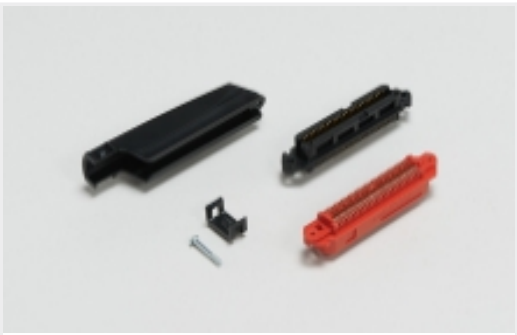

[IDC D-Sub Connectors\(55\)](#)



[Panel Mount D-Sub Connectors\(10\)](#)


Customers Also Bought



TE Part #2129276-1
[PLUG ASSY 0.6mm CHAMP DOCKING](#)




TE Part #1735446-4
[2MM PITCH HPI POST HEADER, VERTICAL, 4P](#)

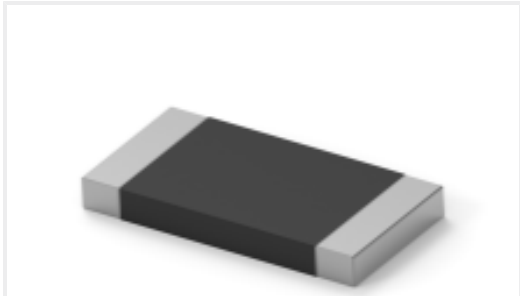


TE Part #3-2176421-4
[TLRP 2512 2.0W R082 1% 25PPM 4K RL](#)




TE Part #2214869-1
[MiniSAS HD, 1x2 Rec Assy w/ weld](#)

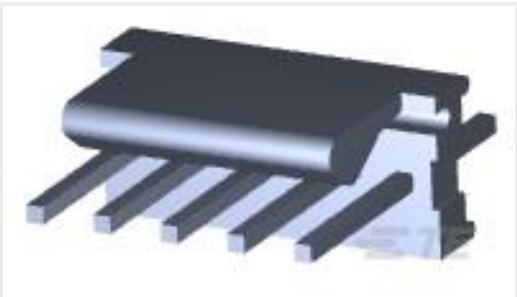


TE Part #641215-5
[05P MTA100 HDR ASSY FL/ST 30AU](#)

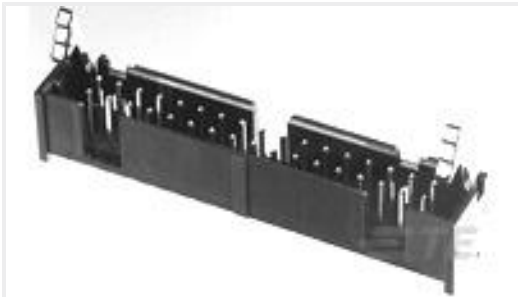


TE Part #104128-5
[026 LOPRO HDR SP 30DP LATCH](#)

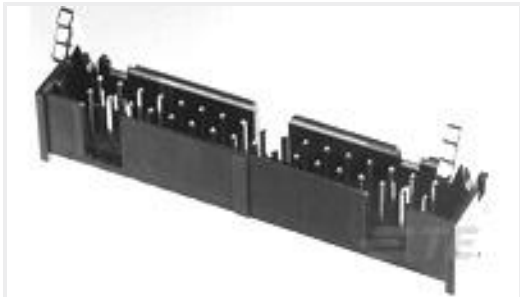

TE Part #104128-6
[034 LOPRO HDR SP 30DP LATCH](#)

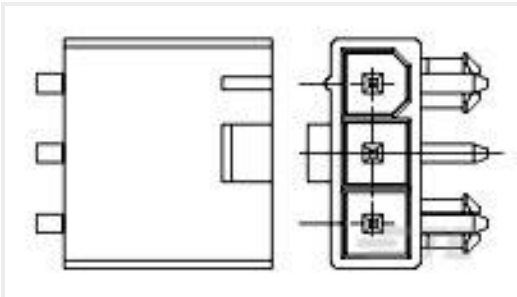

TE Part #2029151-5
[5P R/A HDR VAL-U-LOK V0 W/P](#)

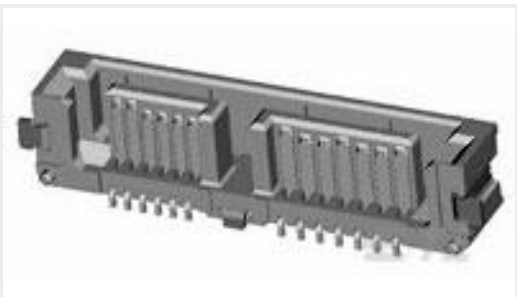

TE Part #1735539-2
[Slimline SATA Receptacle, Vertical, SMT](#)



TE Part #5-534267-2
[20 MODIV VRT DR DE 100/125](#)

Documents

Product Drawings

[REC ASSY 0.6mm CHAMP DOCKING C](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_2129260-1_B_c-2129260-1-b.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_2129260-1_B_c-2129260-1-b.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2129260-1_B_c-2129260-1-b.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[6-1773457-9_CHAMP_DOCKING_CONNECTOR_QUICK_REFERENCE_GUIDE](#)

English

Product Specifications

[Product Specification](#)

English