




Connectors > Pluggable IO Connectors & Cages

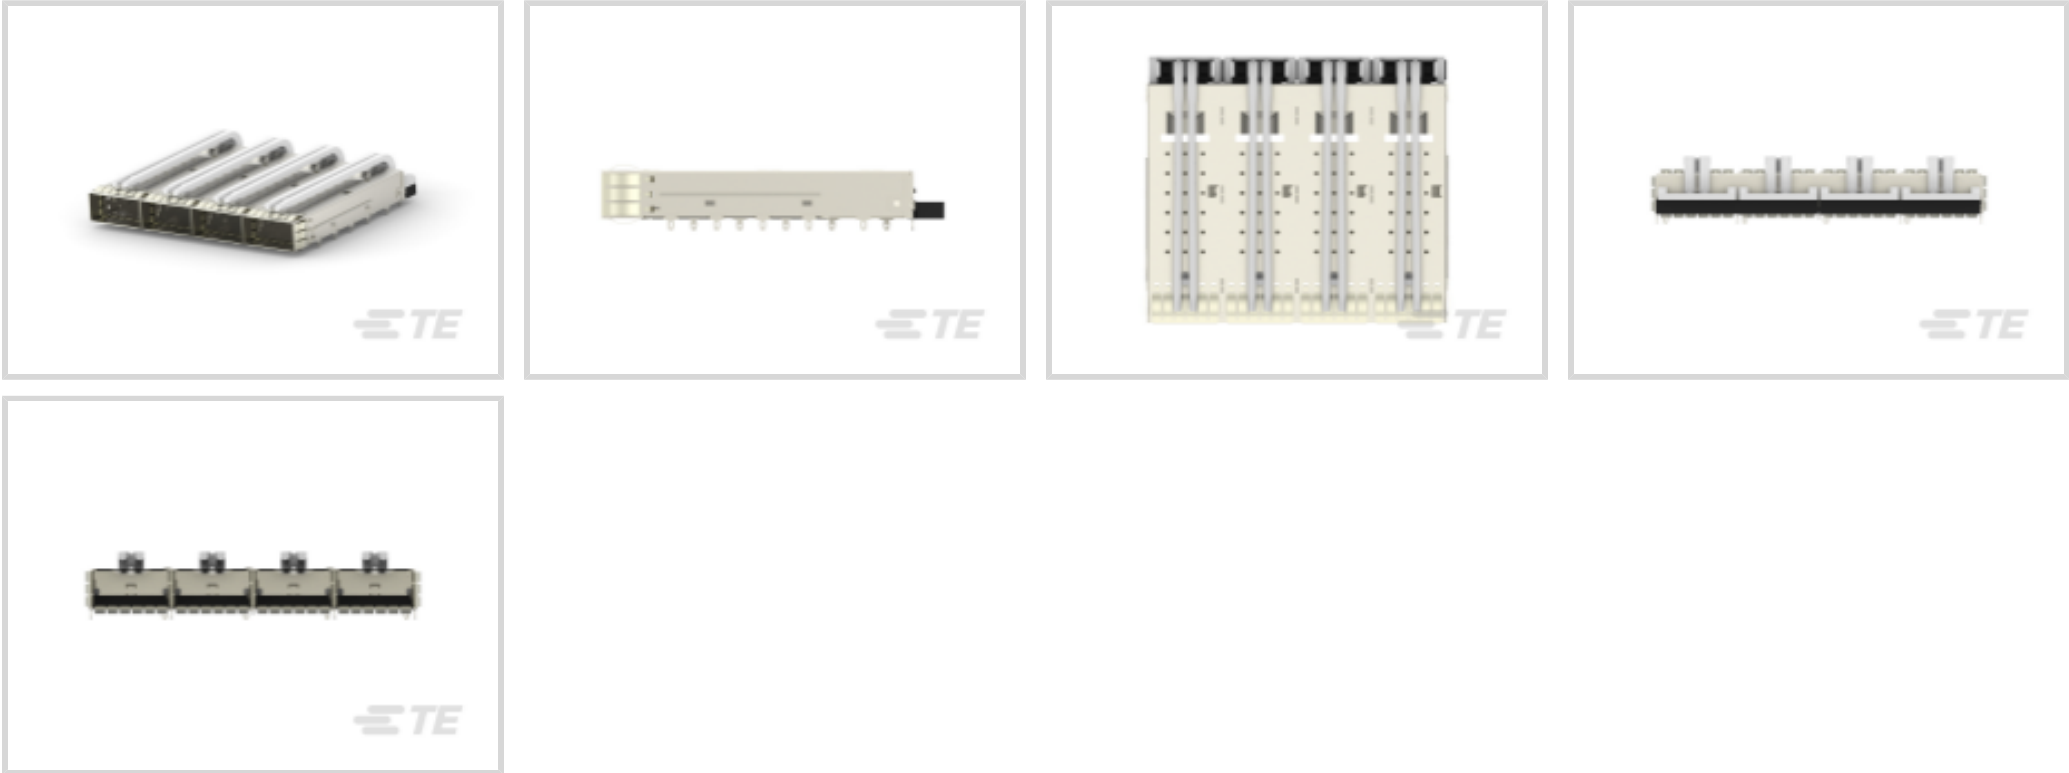

Form Factor: **QSFP28/56**
Pluggable I/O Product Type: **Cage Assembly**
Sealable: **No**
Circuit Application: **Signal**
Operating Temperature Range: **-40 – 85 °C [-40 – 185 °F]**

Features

Product Type Features

Cage Type	Ganged
Form Factor	QSFP28/56
Pluggable I/O Product Type	Cage Assembly
Sealable	No

Configuration Features

Number of Rear EONs per Port Column	1
Number of Ports	4
Port Matrix Configuration	1 x 4

Electrical Characteristics

Data Rate (Max)	28 Gb/s
-----------------	---------

Contact Features

PCB Contact Termination Area Plating Material	Tin
---	-----

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
---------------------------	--------------------------



Termination Post & Tail Length	2.05 mm[.081 in]
--------------------------------	------------------

Housing Features

Cage Material	Nickel Silver
---------------	---------------

Dimensions

PCB Thickness (Recommended)	1.57 mm[.062 in]
-----------------------------	------------------

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Pluggable I/O Applications	SFP+ Stacked Belly-to-Belly
Heat Sink Compatible	No
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Box & Tray
------------------	------------

Other

Included Lightpipe	Yes
EMI Containment Feature Type	Internal/External EMI Springs

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


Also in the Series | zQSFP+/QSFP28

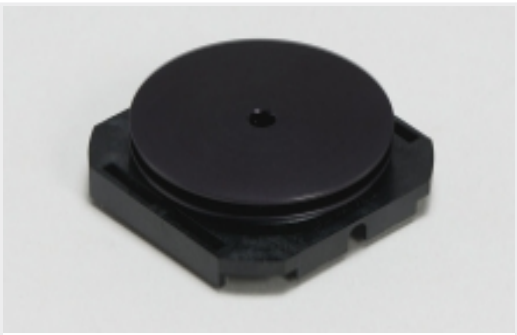

Heat Sinks(7)

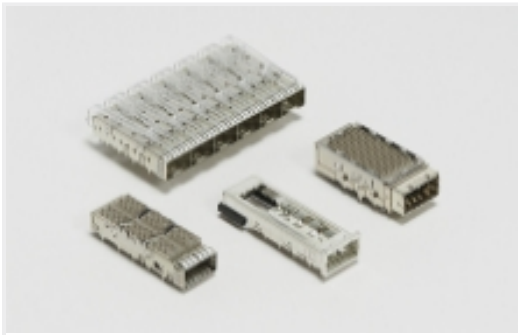


Pluggable IO Connectors & Cages(424)

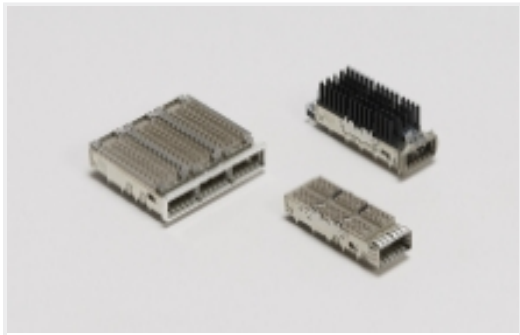

QSFP, QSFP+ & zQSFP+(424)


Customers Also Bought

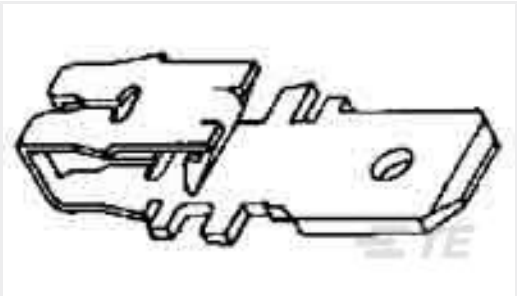

TE Part #1742160-1
TAB,187 FASTON,MAG-MATE




TE Part #2351450-1
SMINSA SW PPL 1.47N 5A/3A AC 3A DC SP

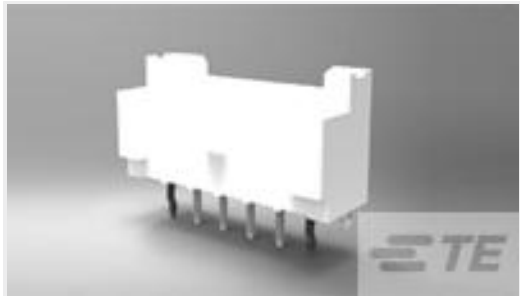

TE Part #1-1744439-8
EP2.5 Shrd HDR ASSY 18P VERT, GW



TE Part #2102502-4
FORTIS LRM, GROUNDING POST, PASSIVATED

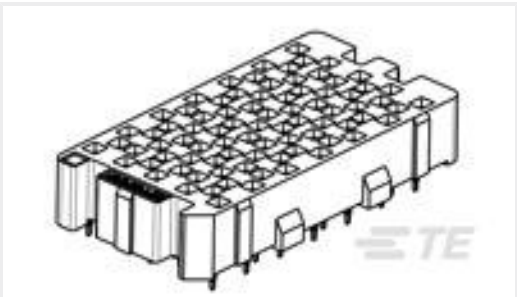

TE Part #5-2143411-1
STRADA MESA,RC,HF,024,000,00,SN,N,NA



TE Part #8-1879011-5
SMF2 680K 5%




TE Part #2842154-5
10P,2MM,BRK HDR,DRRT,2.8,0.1AU,TB W/CAP



TE Part #3-1469388-7
ATCA GUIDE MODULE VERT LONG PIN



TE Part #2-2319764-0
E STACK PIANO 10P G SHORT TUBE PD OFF

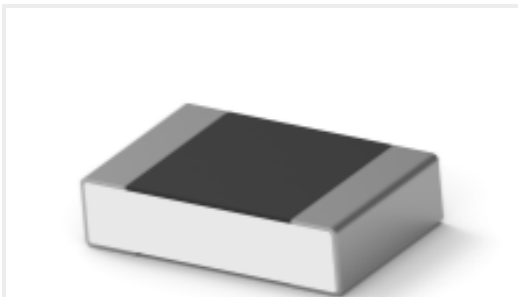

TE Part #4-2176379-5
RQ 0805 309R 0.1% 10PPM 5K RL

Documents

Product Drawings

CAGE ASSY, 1X4, QSFP28, SPRING, LP

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2170746-2_A.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_2170746-2_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2170746-2_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[QSFP28/56 and zQSFP+ Interconnects](#)

English

Product Specifications

[Application Specification](#)

English