UPF50B120RV V ACTIVE

Holsworthy | Holsworthy UPF

TE Internal #: 2176163-5 120 ohm, Through-Hole Precision Resistor, Metal Film, .5 W, .1 %, ±5 ppm/°C, Axial-Leaded, Copper Termination, 10.2 x 4 mm, Bulk, Holsworthy UPF

View on TE.com >



Passive Components > Resistors > Through-Hole Resistors



Resistance Value: 120Ω

Resistor Type: Precision Resistor

Element Type: Metal Film

Power Rating: .5 W

Resistance Class: Up to $1k\Omega$

Features

Product Type Features

Resistor Type

Element Type

Precision Resistor

Metal Film

10.2 x 4 mm

Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Operating Voltage	300 V
Resistance Value	120 Ω
Power Rating	.5 W
Resistance Class	Up to 1kΩ
Passive Component Tolerance	.1 %
Body Features	
Lead Type	Axial-Leaded
Termination Features	
Termination Area Base Material	Copper
Number of Terminations	2
Dimensions	

For support call+1 800 522 6752

Passive Component Dimensions

UPF50B120RV

120 ohm, Through-Hole Precision Resistor, Metal Film, .5 W, .1 %, ±5 ppm/°C, Axial-Leaded, Copper Termination, 10.2 x 4 mm, Bulk, Holsworthy UPF



Usage Conditions

Operating Temperature Range	-55 – 125 °C
Temperature Coefficient	±5 ppm/°C
Packaging Features	
Packaging Method	Bulk
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

UPF50B120RV

120 ohm, Through-Hole Precision Resistor, Metal Film, .5 W, .1 %, ±5 ppm/°C, Axial-Leaded, Copper Termination, 10.2 x 4 mm, Bulk, Holsworthy UPF








Also in the Series | Holsworthy UPF





Customers Also Bought

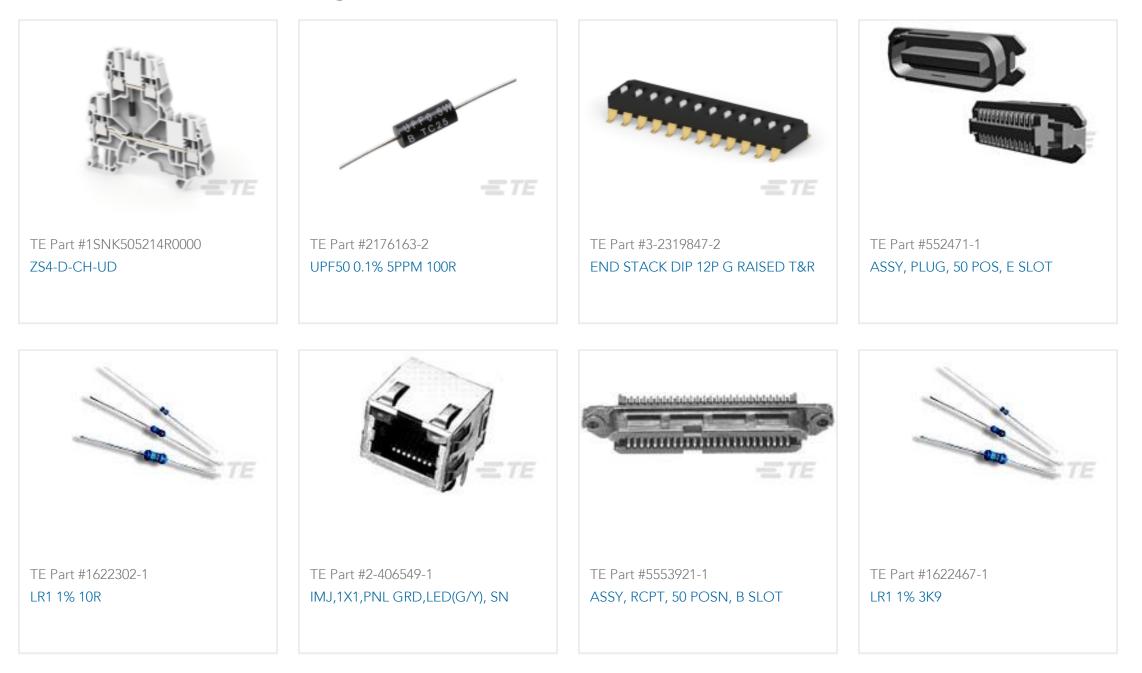

UPF50B120RV

120 ohm, Through-Hole Precision Resistor, Metal Film, .5 W, .1 %, ±5 ppm/°C, Axial-Leaded, Copper Termination, 10.2 x 4 mm, Bulk, Holsworthy UPF





Documents

Product Drawings UPF50 0.1% 5PPM 120R

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2176163-5_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2176163-5_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2176163-5_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages High Precision Metal Film Leaded Resistor Type UPF Series

English