2205061-3 - ACTIVE


Micro-MaTch | Micro-MaTch Industrial

TE Internal #: 2205061-3 MICRO-MATCH MOW Cable Assembly, 6 Positions, .2 m [.656 ft], Gray Cable, Equalized, 28 AWG, 159.8 – 159.88 mm² Wire, MICRO-MATCH MOW Plug End A

View on TE.com >



Cable Assemblies > Copper Cable Assemblies > Pluggable I/O Cable Assemblies > MICRO-MATCH STD MOW TO MOW CABLE ASSY

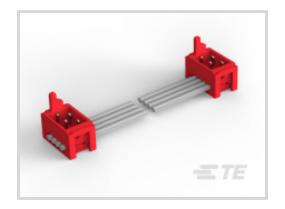

Cable Assembly Type: MICRO-MATCH MOW

Number of Positions: 6

Cable Assembly Length: .2 m [.656 ft]

Cable Color: Gray

Equalized: Yes

All MICRO-MATCH STD MOW TO MOW CABLE ASSY (27)

Features

Product Type Features

Cable Assembly Category

Industry Standard

| Cable Assembly Type | MICRO-MATCH MOW |
|----------------------------|----------------------|
| Cable Style | Ribbon Cable |
| Cable Assembly (End A) | MICRO-MATCH MOW Plug |
| Cable Assembly (End B) | MICRO-MATCH MOW Plug |
| Configuration Features | |
| Number of Positions | 6 |
| Keyed Position | 1 |
| Number of Signal Positions | 6 |
| Body Features | |
| Cable Color | Gray |
| Equalized | Yes |
| Cable Flammability Rating | UL 2651 |
| Mechanical Attachment | |
| Mating Alignment | With |
| Dimensions | |

& For support call+1 800 522 6752

2205061-3

MICRO-MATCH MOW Cable Assembly, 6 Positions, .2 m [.656 ft], Gray Cable, Equalized, 28 AWG, 159.8 – 159.88 mm² Wire, MICRO-MATCH MOW Plug End A



| Wire Size | 159.8 – 159.88 mm² |
|---|------------------------|
| Operation/Application | |
| Shielded | No |
| Halogen Free | No |
| Other | |
| Cable Assembly Configuration | Double Ended |
| Cable Assembly Length | .2 m[.656 ft] |
| For compliance documentation, visit the product page on TE.com> | |
| | Compliant |
| EU RoHS Directive 2011/65/EU | Compliant |
| | Compliant Compliant |
| EU RoHS Directive 2011/65/EU | • |
| EU ELV Directive 2000/53/EC | Compliant |

naiogen content

Solder Process Capability

ppm.

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

2205061-3


MICRO-MATCH MOW Cable Assembly, 6 Positions, .2 m [.656 ft], Gray Cable, Equalized, 28 AWG, 159.8 – 159.88 mm² Wire, MICRO-MATCH MOW Plug End A





Female-on-Board Connector, Top Entry

Also in the Series | Micro-MaTch Industrial

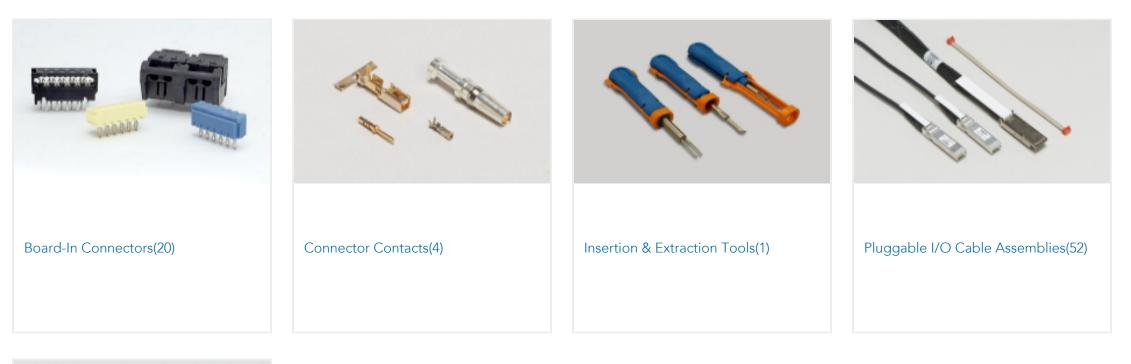



Ribbon Cable Connectors(183)

Customers Also Bought





2205061-3

MICRO-MATCH MOW Cable Assembly, 6 Positions, .2 m [.656 ft], Gray Cable, Equalized, 28 AWG, 159.8 – 159.88 mm² Wire, MICRO-MATCH MOW Plug End A





TE Part #DTP13-4P HDR, 4P, BLK, RA, SN/NI/CU

Documents

Product Drawings CA MICRO-MATCH MOW-MOW 6POS

English

Product Specifications
Application Specification
English
micro match miniature connector system
English