2227838-7 - ACTIVE

TE Internal #: 2227838-7 zSFP+ Stacked (SFP28), Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Signal, Operating Temperature Range 0 – 70 °C [32 – 158 °F]

View on TE.com >



Connectors > Pluggable IO Connectors & Cages > zSFP+ Stacked Cage Assembly: EMI Spring



Form Factor: **zSFP+ Stacked (SFP28)**

Pluggable I/O Product Type: Cage Assembly with Integrated Connector

Centerline (Pitch): .8 mm [.032 in]

Sealable: No

Circuit Application: Signal

All zSFP+ Stacked Cage Assembly: EMI Spring (45)

Features

Product Type Features

Cage Туре	Stacked
Form Factor	zSFP+ Stacked (SFP28)
Pluggable I/O Product Type	Cage Assembly with Integrated Connector
Sealable	No
Configuration Features	
Lightpipe Style	Standard
Number of Positions	480
Number of Ports	24
Port Matrix Configuration	2 x 12
Electrical Characteristics	
Data Rate (Max)	32 Gb/s
Contact Features	
Tail Plating Material	Tin

zSFP+ Stacked (SFP28), Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Signal, Operating Temperature Range 0 – 70 °C [32 – 158 °F]



Termination Features	
Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	1.8 mm[.07 in]
Housing Features	
Cage Material	Nickel Silver Alloy
Centerline (Pitch)	.8 mm[.032 in]
Dimensions	
PCB Thickness (Recommended)	1.5 mm[.059 in]
Usage Conditions	
Operating Temperature Range	0-70 °C[32-158 °F]
Operation/Application	
Pluggable I/O Applications	zSFP+ Thermally Enhanced
Heat Sink Compatible	No
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Tray
Other	
Included Lightpipe	No
EMI Containment Feature Type	Internal/External EMI Springs
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241)

zSFP+ Stacked (SFP28), Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Signal, Operating Temperature Range 0 – 70 °C [32 – 158 °F]



Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts








Customers Also Bought

C For support call+1 800 522 6752

zSFP+ Stacked (SFP28), Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Signal, Operating Temperature Range 0 – 70 °C [32 – 158 °F]



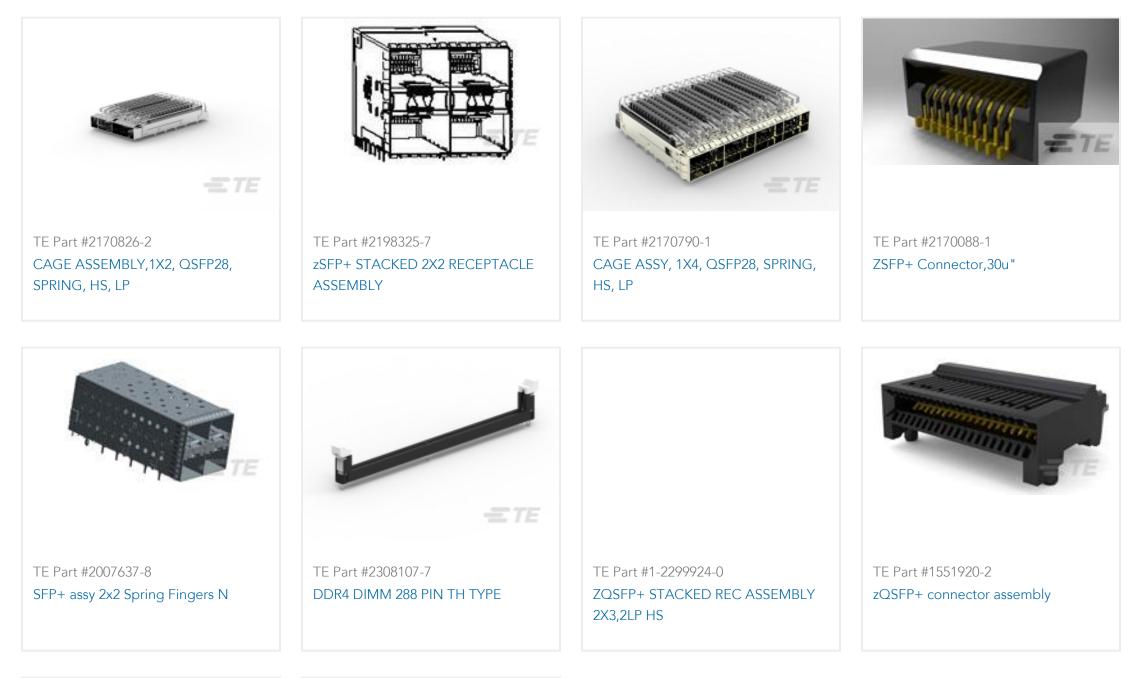



TE Part #2057410-1 IMP100S,R,RA2P16C,RG,39 TE Part #2302014-1 ZSFP+ 1X8 CAGE ASSY, PRESS-FIT, LP, HS

Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_2227838-7_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2227838-7_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2227838-7_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages zSFP+ Interconnect Brochure

English

Product Specifications

& For support call+1 800 522 6752

zSFP+ Stacked (SFP28), Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Signal, Operating Temperature Range 0 – 70 °C [32 – 158 °F]



Application Specification

English