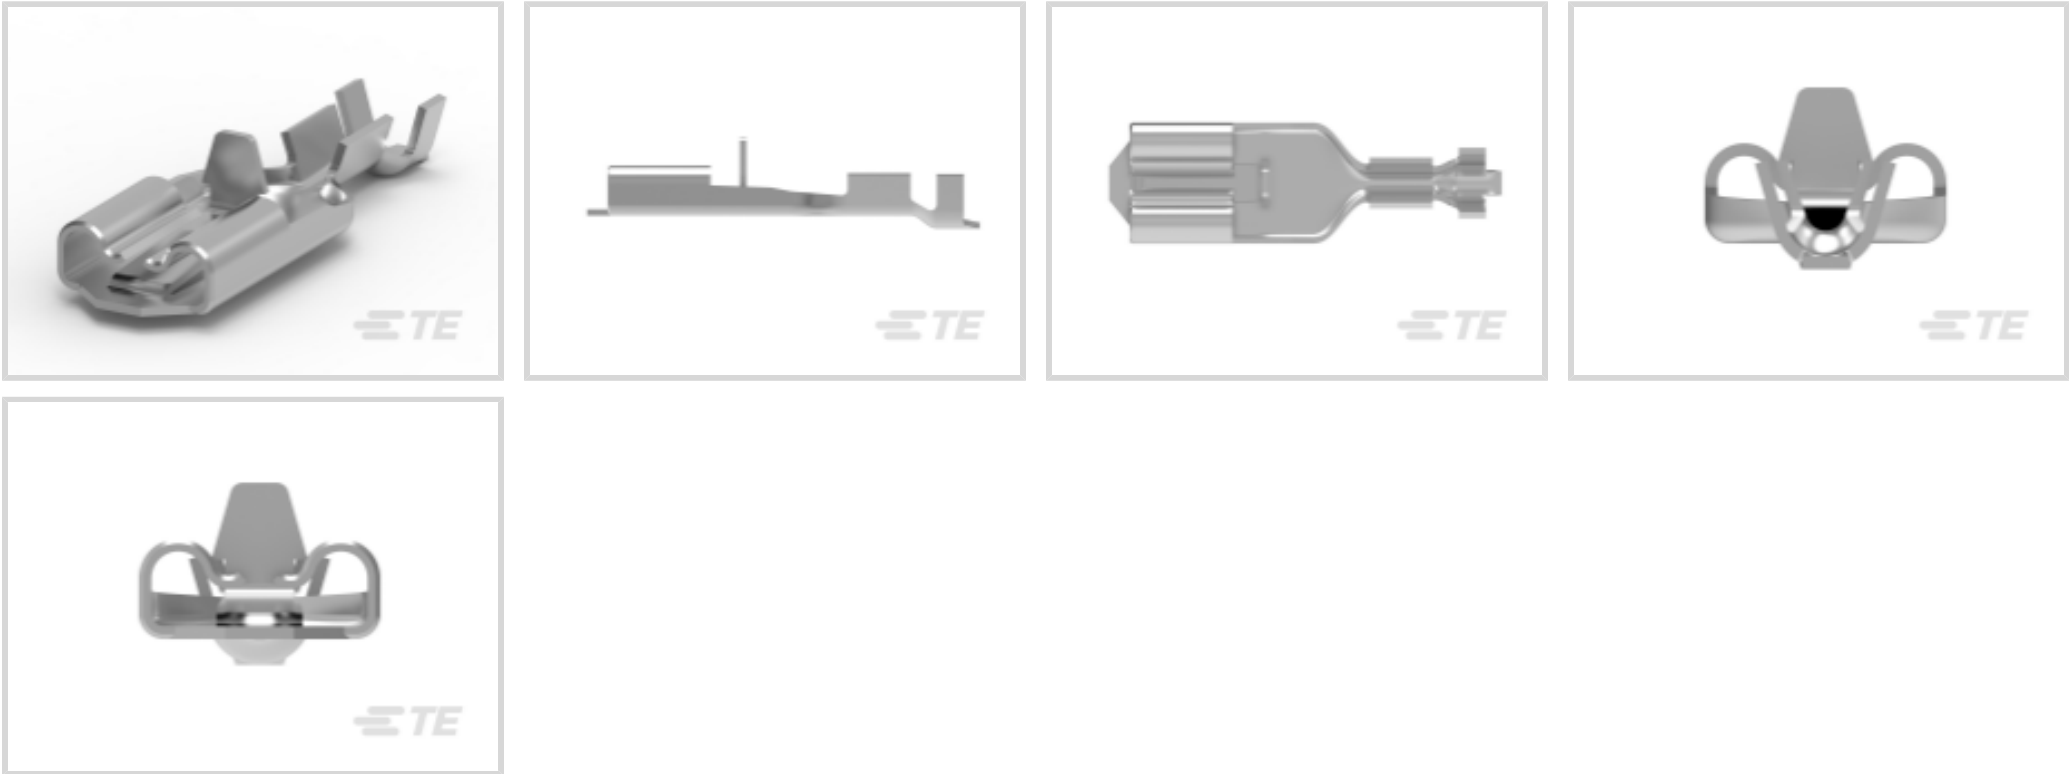




Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.32 – .82 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Compatible Insulation Diameter Range	1.52 – 2.54 mm[.06 – .1 in]
Terminal Material Thickness	.41 mm[.016 in]
Wire Size	.32 – .82 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	6000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability






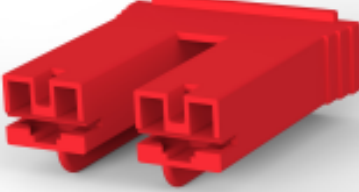
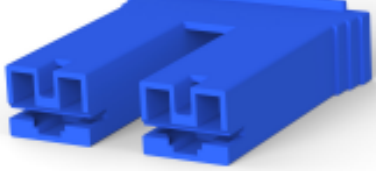
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 341299-1 POSILOK RECPT MK II .250	 TE Part # 2-521229-1 PL EXII & FASTON 250 HSG 2P NAT	 TE Part # 172076-2 PL MKII 250 REC HSG 1P NYLON BLACK	 TE Part # 1969864-1 2P, 250 SERIES, POSITIVE LOCK MARK II
 TE Part # 1969865-1 3P, 250 SERIES, POSITIVE LOCK MARK II	 TE Part # 172076-6 POSITIVE LOCK 250 HOUSING RECEPTACLE	 TE Part # 172076-1 POSITIVE LOCK 250 HOUSING RECEPTACLE	 TE Part # 1969332-3 POSITIVE LOCK 250 HOUSING RECEPTACLE
 TE Part # 172076-4 POSITIVE LOCK 250 HOUSING RECEPTACLE	 TE Part # 2-521229-2 PL 250 HOUSING RECEPTACLE RED	 TE Part # 3-1969453-1 HSG,RECP,POSI-LOCK&STD FAST250	 TE Part # 178833-1 POSITIVE LOCK .250 HOUSING RECEPTACLE
 TE Part # 1969759-1 Pos Lock 250 M INF SW Hsg 3P MKII V0	 TE Part # 1897058-1 CONNECTOR .125/.250 SERIES	 TE Part # 4-520935-3 250 HSG. PL MKII REC. 15.11mm 2P BLUE	 TE Part # 4150155-2 OCEAN-2.0-APPLICATOR-E-080F140F-SEA



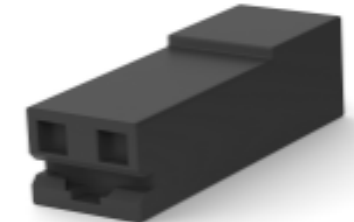
TE Part # 7-4150155-7
OCEAN_2.0_SPARE_PART_KIT-080F140F



TE Part # 1969332-2
POSITIVE LOCK 250 HOUSING RECEPTACLE



TE Part # 1969761-1
4P POSITIVE LOCK HSG, MARK II



TE Part # 1969820-1
250 HIGH TEMP POS LOCK HSG LCP


Also in the Series | Mark II



Automotive Connector Locks & Position Assurance(1)



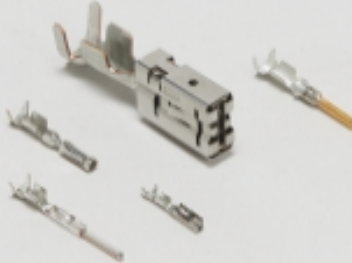Automotive Housings(6)



Automotive Terminals(1)



Connector Seals & Cavity Plugs(1)



Crimp Terminal Housings(177)




Insertion & Extraction Tools(3)




Quick Disconnects(173)

Also in the Series | Positive Lock 250

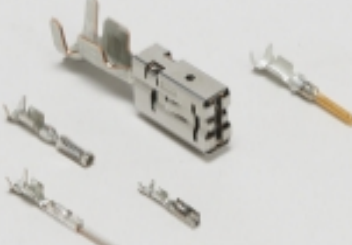

Automotive Terminals(1)

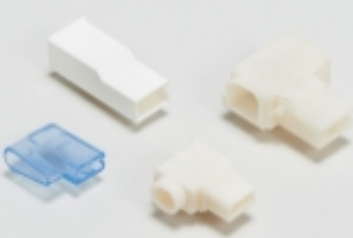

Crimp Terminal Housings(177)



Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(5)



Quick Disconnects(173)

Customers Also Bought



TE Part #1-2324579-0
HOUSING, PLUG, 10P,DUAL ROW, EP2.5



TE Part #1971786-1
PTL TAB CONTACT, 20 - 24 AWG



TE Part #42800-2
187 FASTON REC 20-16 AWG TPBR



TE Part #1971781-1
PTL RECEPTACLE CONTACT, 14 AWG



TE Part #794714-1
06P UMNLCAP HSG NATL,PAN MNT



TE Part #2-1971777-2
PTL TPA HWI 1 X 2 NATURAL



TE Part #41711
RING TERMINAL 22-18 AWG TPBR



TE Part #CAT-P8704-T669
Power Key TPA



TE Part #CV08194001
VERSAFLEX-FR-UL-1/4-09-SP

Documents

Product Drawings

POS LOCK 250 Rec, MKII, 22-18 TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2238156-1_B.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_2238156-1_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2238156-1_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[POS_LOCK_MII_QRG](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL](#)

English