




Connectors > Lighting Connectors > Ballast Connectors

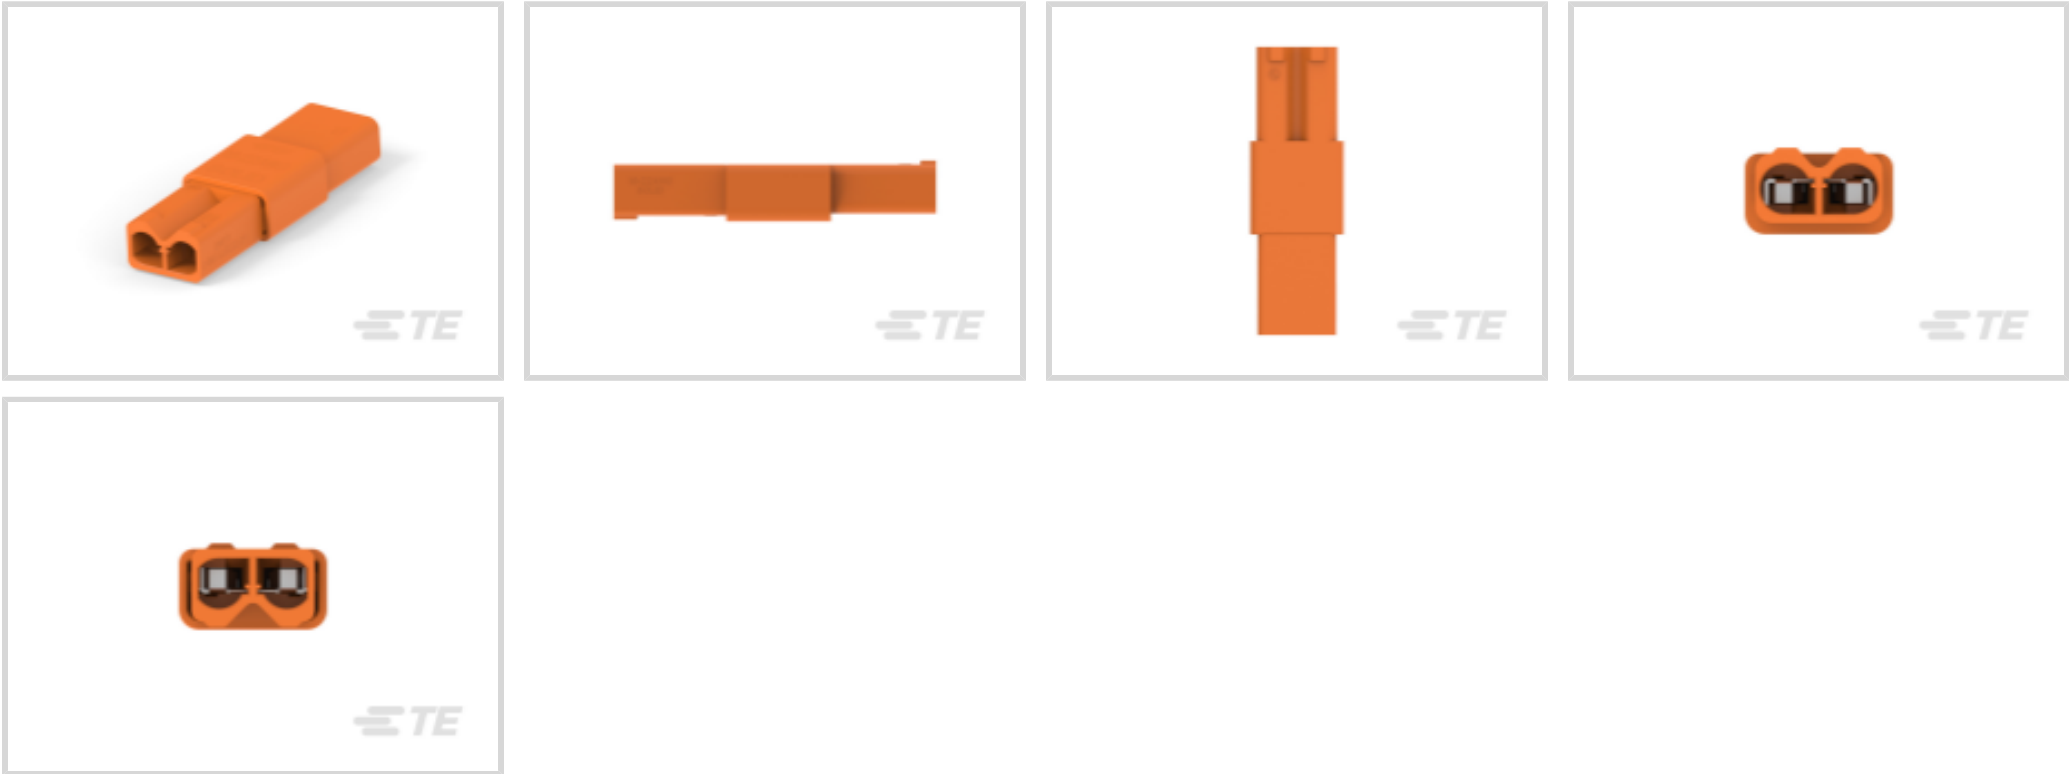

Number of Positions: 2

Lighting Product Type: **Connector**

Termination Method to Wire & Cable: **Poke-In**

Connector System: **Wire-to-Wire**

Centerline (Pitch): **5.7 mm**

Features

Product Type Features

Lighting Product Type	Connector
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Rows	1
Number of Positions	2

Electrical Characteristics

Operating Voltage (Max)	600 VAC
-------------------------	---------

Body Features

Primary Product Color	Orange
-----------------------	--------

Contact Features

Contact Current Rating (Max)	3 A
------------------------------	-----



Termination Features

Termination Method to Wire & Cable	Poke-In
------------------------------------	---------

Mechanical Attachment

Mating Alignment	With
------------------	------

Housing Features

Centerline (Pitch)	5.7 mm
--------------------	--------

Dimensions

Connector Width	13.3 mm
Connector Height	7.75 mm
Connector Length	40 mm
Wire Size	18 – 22 AWG

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL 2459

Packaging Features

Packaging Method	Loose Piece
Packaging Quantity	250

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Melamine (3% in 23412681598) Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per



homogenous material. Also BFR/CFR/PVC Free


Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 8-2834006-2
2P MRPK CONN_BK/WE




TE Part # 4-2213678-3
Z35 LED HOLDER 12*15MM
PANHEAD LEDiL




TE Part # 4-2213678-5
Z35 LED HOLDER 13.5*13.5MM
PANHEAD LEDiL




TE Part # 4-2213480-1
LUMAWISE Z50 HOLDER 2828 LEDiL




TE Part # 4-2325807-3
LUMAWISE Z45 LED HOLDER 19X19
typB LEDiL



TE Part # 4-2325807-2
LUMAWISE Z45 LED HOLDER 19X19
typA LEDiL




TE Part # 4-2325811-2
LUMAWISE Z45 LED HOLDER
20X24mm LEDiL



TE Part # 2324697-2
PUSH GRIP CONNECTOR 2P

Also in the Series | LIGHT-N-LOK Ballast Connector

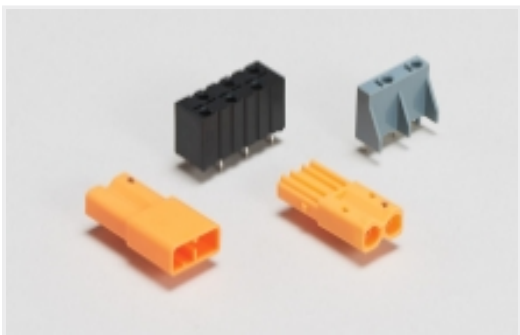

Ballast Connectors(36)

Customers Also Bought



TE Part #2834048-1
PLUG, 2P LATCHED POKE-IN WTW CONN.NL

TE Part #2-2176326-0
CRGP 0603 390R 1%

TE Part #170014-5
FF 110 TAB 20-16AWG BR

TE Part #CAT-HST-RNF100-0
RNF-100-0 Heat Shrink Tubing

TE Part #2375239-2
2P Unshrouded Header Full Pin,GWT

TE Part #1622319-3
LR1 1% 14K7

TE Part #1445022-2
MICRO MNL RECEPT HSG SINGLE R

TE Part #2213194-1
LUMAWISE LED HOLDER OPTIC CLIP Z50 TYPE1

TE Part #2213678-5
Z35 MINI LED HOLDER 13.5*13.5MM PANHEAD

Documents

Product Drawings
2PIN WIRE TO WIRE CONNECTOR
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_2271203-1_D.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_2271203-1_D.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_2271203-1_D.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages



[LIGHT-N-LOK Standard Connectors](#)

English

[LIGHT-N-LOK Brochure](#)

English

[Product Specifications](#)

[Application Specification](#)

English

[Instruction Sheets](#)

[Instruction Sheet \(U.S.\)](#)

English

[Agency Approvals](#)

[UL Report](#)

English