




Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies

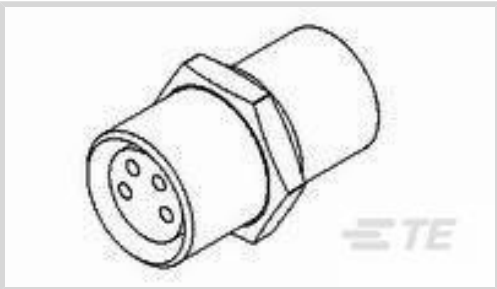

Cable Assembly Type: **M8 Pigtail**

Number of Positions: **4**

Cable Assembly Length: **.2 m**

M8/M12 Application Type: **Sensor/Actuator**

Connector & Keying Code: **A**

Features

Product Type Features

Cable Assembly Type	M8 Pigtail
Cable Assembly (End A)	M8 Socket

Configuration Features

Number of Positions	4
---------------------	---

Electrical Characteristics

Operating Voltage	60 VDC
-------------------	--------

Body Features

Connector Color (End A)	Blue
Wire Color (Base)	Brown, White, Blue, Black
Connector & Keying Code	A

Contact Features

Contact Current Rating (Max)	4 A
------------------------------	-----

Mechanical Attachment

Thread Size	M8
Connector Orientation (End A)	Straight

Housing Features

Housing Material	Plastic
------------------	---------

Dimensions

--	--



Outside Cable Diameter	3 mm[.188 in]
Wire Size	24 AWG

Usage Conditions

Operating Temperature Range	-40 – 80 °C[-40 – 176 °F]
-----------------------------	---------------------------

Operation/Application

M8/M12 Application Type	Sensor/Actuator
Shielded	No

Packaging Features

Packaging Method	Box
------------------	-----

Other

Field Serviceable	Yes
Cable Assembly Length	.2 m
Cable Assembly Configuration	Single Ended

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # T4011008041-000
M8,SCREW, MALE,S,UNSHIELD,4P,
GOLD

Customers Also Bought



TE Part #5-747905-2
9 Rcpt Solder Cup, Gold Flash,



TE Part #5748676-3
DIE CAST CBL CLMP KIT,SZ 3



TE Part #747784-3
AMPLI JACKSCREW 4-40 KIT



TE Part #2176372-8
RQ 0603 59K 0.1% 10PPM 5K RL

Documents

Product Drawings
M8 Female Panel Mld Rear Mt M8 fast pigt
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_2273015-1_A.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_2273015-1_A.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_2273015-1_A.3d_stp.zip
English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages
M8 / M12 Connector System Catalog
English



M8 / M12 Connector System Catalog

Japanese

Product Specifications

Product Specification

English