




Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies

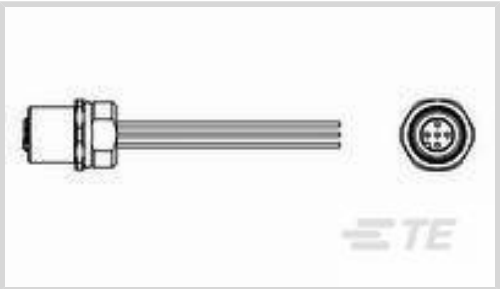

Cable Assembly Type: **M12 Pigtail**

Number of Positions: **4**

Cable Assembly Length: **.2 m**

M8/M12 Application Type: **Sensor/Actuator**

Connector & Keying Code: **A**

Features

Product Type Features

Cable Assembly Type	M12 Pigtail
Cable Assembly (End A)	M12 Socket

Configuration Features

Number of Positions	4
---------------------	---

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Body Features

Connector Color (End A)	Blue
Wire Color (Base)	Brown, White, Blue, Black
Connector & Keying Code	A

Contact Features

Contact Current Rating (Max)	4 A
------------------------------	-----

Mechanical Attachment

Thread Size	M12
Connector Orientation (End A)	Straight

Housing Features

Housing Material	Plastic
------------------	---------

Dimensions

--	--



Outside Cable Diameter	3 mm[.188 in]
Wire Size	22 AWG

Usage Conditions

Operating Temperature Range	-40 – 80 °C[-40 – 176 °F]
-----------------------------	---------------------------

Operation/Application

M8/M12 Application Type	Sensor/Actuator
Shielded	No

Packaging Features

Packaging Method	Box
------------------	-----

Other

Field Serviceable	Yes
Cable Assembly Length	.2 m
Cable Assembly Configuration	Single Ended

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # T4111001041-000
RPC-M12-MS-4CON-PG7-MU

Customers Also Bought



TE Part #3-2316366-8
AV19 SPL 3A POWER LOGO R&B 12V FL



TE Part #1-966067-4
FER,WIRE,PL SLV,1.50/16,L12,BLACK, LP



TE Part #CAT-IN287-SI113
Fieldbus, CC-Link M12 A-Code 4pos PVC



TE Part #324185
TERMINAL,T-N R 3/0 3/8



TE Part #52924
TERMINAL,PIDG SPR SPD 26-22 6



TE Part #1SET313169R0000
M12-MS-4P-M12-FS-PUR-1.0



TE Part #T4111501041-000
M12,MALE,STRAIGHT,D CODE,4P, PG7,GOLD



TE Part #11028414-00
LDT1-028K W/TH LEADS/RIVE

Documents

Product Drawings
M12 Female pnl Mld Rear Mt PG9 pigt A
English

Datasheets & Catalog Pages
M8 / M12 Connector System Catalog
English
M8 / M12 Connector System Catalog
Japanese

Product Specifications
Product Specification
English

2273054-1

M12 Pigtail Cable Assembly, 4 Position, .2 m, Sensor/Actuator, A Code, M12 Socket
End A, Single Ended, Plastic

