# 2278730-1 - ACTIVE


AMP | Heavy Duty Sealed Connector Series

TE Internal #: 2278730-1 3 Position Housing, Housing for Male Terminals, Wire-to-Wire, 4 mm [.157 in] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series

#### View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Heavy Duty Sealed Connector Series Housings

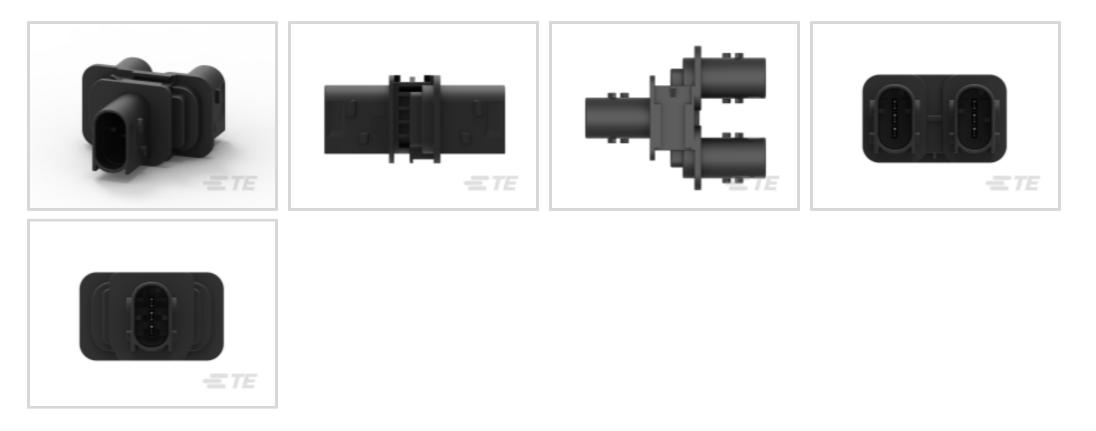

Number of Positions: 3

Connector & Housing Type: Housing for Male Terminals

Mating Tab Width: 1.5 mm [.06 in ]

Connector System: Wire-to-Wire

Centerline (Pitch): 4 mm [.157 in ]

### All Heavy Duty Sealed Connector Series Housings (177)

## Features

Prod	luct <sup>-</sup>	Гуре	Feature	es
		<b>J</b>		

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	42 VDC

3 Position Housing, Housing for Male Terminals, Wire-to-Wire, 4 mm [.157 in] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Nominal Voltage Architecture	42 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	A-B-C
Contact Features	
Contact Size	1.5mm
Contact Type	Tab
Mating Tab Width	1.5 mm[.06 in]
Contact Current Rating (Max)	23 A
Mechanical Attachment	
Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

## Housing Features

Housing Material	PBT GF30		
Centerline (Pitch)	4 mm[.157 in]		
Dimensions			
Product Width	42.4 mm[1.67 in]		
Product Length	25.9 mm[1.02 in]		
Connector Height	53.1 mm[2.09 in]		
Usage Conditions			
Operating Temperature (Max)	140 °C[284 °F]		
Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]		
Operation/Application			
Circuit Application	Power		
Industry Standards			
IP Rating	IP67, IP69K		
UL Flammability Rating	UL 94V-0		
Packaging Features			

**C** For support call+1 800 522 6752

3 Position Housing, Housing for Male Terminals, Wire-to-Wire, 4 mm [.157 in] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Packaging Quantity	250
Packaging Method	Box
Other	
Serviceable	No
Connector Position Assurance Capable	No

## **Product Compliance**

#### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

3 Position Housing, Housing for Male Terminals, Wire-to-Wire, 4 mm [.157 in] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series











TE Part # 1-1418448-2 3POS MCP1.5k REC HSG CO MID POS CLOSED

## Also in the Series | Heavy Duty Sealed Connector Series

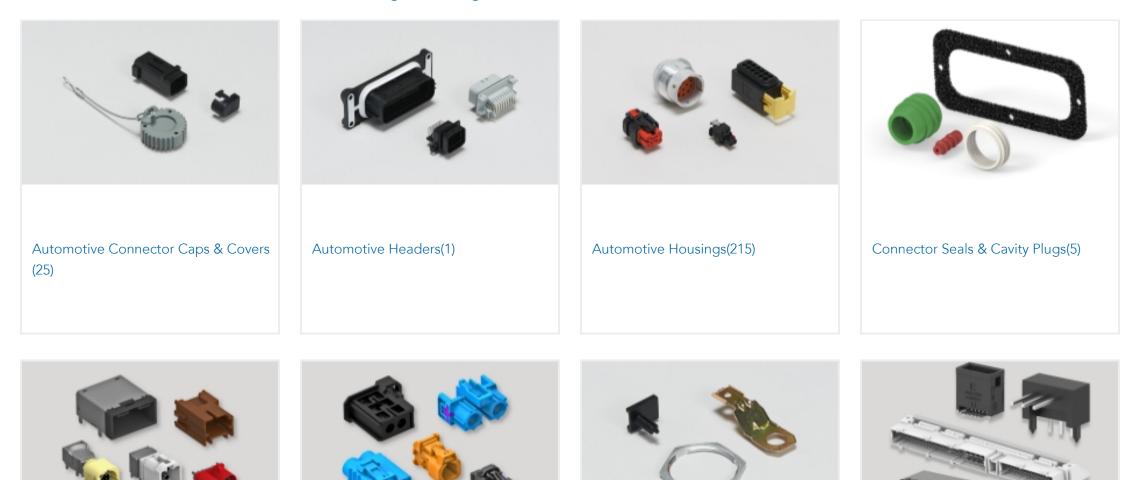

Data Connectivity Headers(2)	Data Connectivity Housings(16)	Other Automotive Connector	PCB Headers & Receptacles(1)
		Accessories(36)	

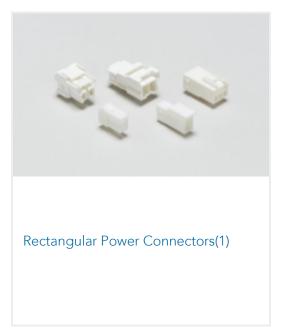

## Customers Also Bought



3 Position Housing, Housing for Male Terminals, Wire-to-Wire, 4 mm [.157 in] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series





## Documents

## Product Drawings 3P CAN CONNECTOR, RECEPTACLE

English

**CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2278730-1\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2278730-1\_A.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_2278730-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Heavy Duty Sealed Connector Series

English

HDSCS CAN Bus Y-Connector and 120 Resistor Brochure

English

HDSCS Catalog

English

ICT Terminals and Connectors Catalogue

English

Product Specifications Application Specification

English