

#### zQSFP+/QSFP28

TE Internal #: 2289129-2

zQSFP+, Cage Assembly with Integrated Connector, .8mm [.032in]

Centerline, Signal, Operating Temperature Range -40 – 85 °C [-40 –

185 °F]

View on TE.com >



#### Connectors > Pluggable IO Connectors & Cages











Form Factor: **zQSFP+** 

Pluggable I/O Product Type: Cage Assembly with Integrated Connector

Centerline (Pitch): .8 mm [ .032 in ]

Sealable: No

Circuit Application: Signal

### **Features**

### **Product Type Features**

Data Rate (Max)

**Contact Features** 

Contact Current Rating (Max)

Contact Underplating Material

Cage Type	Stacked
Form Factor	zQSFP+
Pluggable I/O Product Type	Cage Assembly with Integrated Connector
Sealable	No
Configuration Features	
Number of Rear EONs per Port Column	3
Number of Positions	152
Number of Ports	4
Port Matrix Configuration	2 x 2
Electrical Characteristics	

25 Gb/s

.5 A

Tin



Contact Mating Area Plating Material	Gold (Au)
PCB Contact Termination Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Termination Features	
Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	2 mm[.079 in]
Housing Features	
Cage Material	Nickel Silver
Centerline (Pitch)	.8 mm[.032 in]
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
Usage Conditions	
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]
Operation/Application	
Pluggable I/O Applications	SFP+ Stacked Belly-to-Belly
Heat Sink Compatible	No
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tray
Other	

# **Product Compliance**

EMI Containment Feature Type

Included Lightpipe

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247)

Yes

Internal/External EMI Springs



	Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**





### Also in the Series | zQSFP+/QSFP28

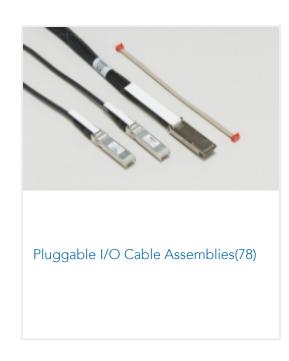





# Customers Also Bought

zQSFP+, Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Signal, Operating Temperature Range -40 – 85 °C [-40 – 185 °F]






TE Part #1-406541-6 MJ,INV,1X1,6PNL G,.140"ST,SN



TE Part #2170790-2 CAGE ASSY, 1X4, QSFP28, SPRING, HS, LP



TE Part #2170790-3 CAGE ASSY, 1X4, QSFP28, SPRING, HS, LP





TE Part #414963-1 SMB PCB R/A JACK



TE Part #2349642-2 CAGE ASSY, 1X4, QSFP28, SPRING, HS, LP





TE Part #2-1926739-5 AssyMinipak Hdl25s10pRARecptSc

TE Part #2180490-4
IMP,Power,4PR,R/AH,R-HLD DWN,
5.7,6.9Tin

TE Part #2100870-1 C/A, SFP+, 1M 30AWG, JUNIPER

#### **Documents**

**CAD Files** 

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2289129-2\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2289129-2\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2289129-2\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

QSFP28/56 and zQSFP+ Interconnects

English

**Product Specifications** 

zQSFP+, Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Signal, Operating Temperature Range -40 – 85 °C [-40 – 185 °F]



**Application Specification** 

English