




Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

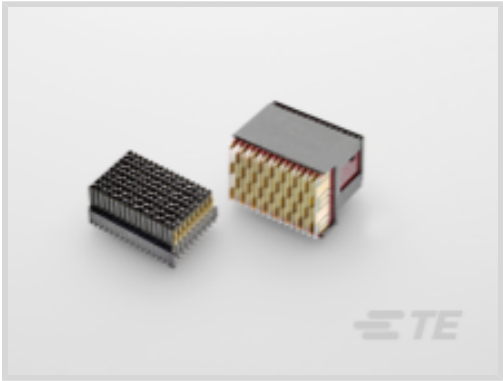

Number of Positions: 112
Row-to-Row Spacing: 1.35 mm [.053 in]
Mating Alignment: With
Mating Alignment Type: Keyed
Number of Rows: 7

Features

Product Type Features

Signal Arrangement	Differential
Connector & Contact Terminates To	Printed Circuit Board
Compatible with PCB Type	Daughtercard
Connector System	Board-to-Board
PCB Connector Type	PCB Mount Header
Shroud Style	Unshrouded

Configuration Features

Number of Pairs	32
Number of Power Positions	0
Number of Ground Positions	40
Backplane Architecture	Traditional Backplane
Number of Signal Positions	8
Card Slot Centerline	20.3 mm[.8 in]
Number of Positions	112
Number of Rows	7
Number of Columns	16
PCB Mount Orientation	Right Angle
Guide Location	Unguided



Signal Characteristics

Number of Differential Pairs per Column	2
Differential Impedance	100 Ω

Contact Features

Contact Current Rating (Max)	1 A
------------------------------	-----

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
---------------------------	--------------------------

Mechanical Attachment

Mating Alignment	With
Mating Alignment Type	Keyed
Connector Mounting Type	Board Mount

Housing Features

Housing Material	LCP GF
Number of Shrouded Sides	2
Centerline (Pitch)	1.8 mm [.075 in]

Dimensions

Row-to-Row Spacing	1.35 mm [.053 in]
--------------------	-------------------

Usage Conditions

Operating Temperature Range	-55 – 125 °C [-67 – 257 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690948374) Article Safe Usage Statements:



Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2102737-1
BP, Right End, MULTIGIG RT 2R

TE Part # 2102736-1
BP, Center, MULTIGIG RT 2R

TE Part # 2000713-1
RA Keyed Guide Mod, Vita 46, Machined

TE Part # 2000676-1
Keyed Guide Pin, Machined, Vita 46

Also in the Series | MULTIGIG RT 2-S

Backplane Power Connectors(8)

Coax Connectors(6)

High Speed Backplane Connectors(10)

PCB RF Modules(1)

Customers Also Bought



TE Part #1-1469492-9
MULTIGIG RT 9MM GUIDE/ESD UNKE

TE Part #1-1469491-4
MULTIGIG RT GUIDEPIN, 9MM 5.70

TE Part #2102772-1
DC, 7Row, Half Left End, MULTIGIG RT 2R

TE Part #1410140-1
MULTIGIG RT T2 .8" BP FULL CNT

TE Part #2302318-1
RA ASSY, 7Rw, Left Half, MULTIGIG RT 2-S

TE Part #1410190-3
MULTIGIG RT T2 7RW DC SE CT RT2

TE Part #2102735-1
BP, Half Left End, MULTIGIG RT 2R

TE Part #2102737-1
BP, Right End, MULTIGIG RT 2R

TE Part #2102736-1
BP, Center, MULTIGIG RT 2R

TE Part #2302321-1
RA ASSY, Left Half RTM, MULTIGIG RT 2-S

Documents

Product Drawings
RA ASSY, 7 Row, Cent DP, MULTIGIG RT 2-S
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_2302317-1_2.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_2302317-1_2.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_2302317-1_2.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages



SOSA Aligned Interconnect Solutions

English

MULTIGIG RT 3 and RT 2-S Connectors

English

Product Specifications

Application Specification

English