

#### **MULTIGIG RT 2-S**

TE Internal #: 2302321-1 56 Position High Speed Backplane Connector, 7 Row, 8 Column, PCB Mount Header, Right Angle, Unshrouded, 1.8 mm [.075 in] Centerline, MULTIGIG RT 2-S

View on TE.com >



Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors



Number of Positions: 56 Row-to-Row Spacing: 1.35 mm [.053 in] Mating Alignment: With Mating Alignment Type: Keyed Number of Rows: 7

#### Features

### Product Type Features

 Signal Arrangement
 Differential

 Connector & Contact Terminates To
 Printed Circuit Board

Compatible with PCB Type	Daughtercard
Connector System	Board-to-Board
PCB Connector Type	PCB Mount Header
Shroud Style	Unshrouded
Configuration Features	
Number of Pairs	16
Number of Power Positions	0
Number of Ground Positions	20
Backplane Architecture	Traditional Backplane
Backplane Architecture Number of Signal Positions	Traditional Backplane 4
	·
Number of Signal Positions	4
Number of Signal Positions Card Slot Centerline	4 20.3 mm[.8 in]
Number of Signal Positions         Card Slot Centerline         Number of Positions	4 20.3 mm[.8 in] 56
Number of Signal Positions         Card Slot Centerline         Number of Positions         Number of Rows	4 20.3 mm[.8 in] 56 7

**C** For support call+1 800 522 6752

56 Position High Speed Backplane Connector, 7 Row, 8 Column, PCB Mount Header, Right Angle, Unshrouded, 1.8 mm [.075 in] Centerline, MULTIGIG RT 2-S



## Signal Characteristics

Number of Differential Pairs per Column	2
Differential Impedance	100 Ω
Contact Features	
Contact Current Rating (Max)	1 A
Termination Features	
Termination Method to PCB	Through Hole - Press-Fit
Mechanical Attachment	
Mating Alignment	With
Mating Alignment Type	Keyed
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	LCP GF
Number of Shrouded Sides	2
Centerline (Pitch)	1.8 mm[.075 in]
Dimonsions	

#### Dimensions

Row-to-Row Spacing	1.35 mm[.053 in]
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Signal
EU RoHS Directive 2011/65/EU	Not Compliant
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU ELV Directive 2000/53/EC	
	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Compliant with Exemptions Restricted Materials Above Threshold

56 Position High Speed Backplane Connector, 7 Row, 8 Column, PCB Mount Header, Right Angle, Unshrouded, 1.8 mm [.075 in] Centerline, MULTIGIG RT 2-S



Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**



TE Part # 2000713-1 RA Keyed Guide Mod, Vita 46, Machined

TE Part # 2000676-1 Keyed Guide Pin, Machined, Vita 46


# Also in the Series | MULTIGIG RT 2-S

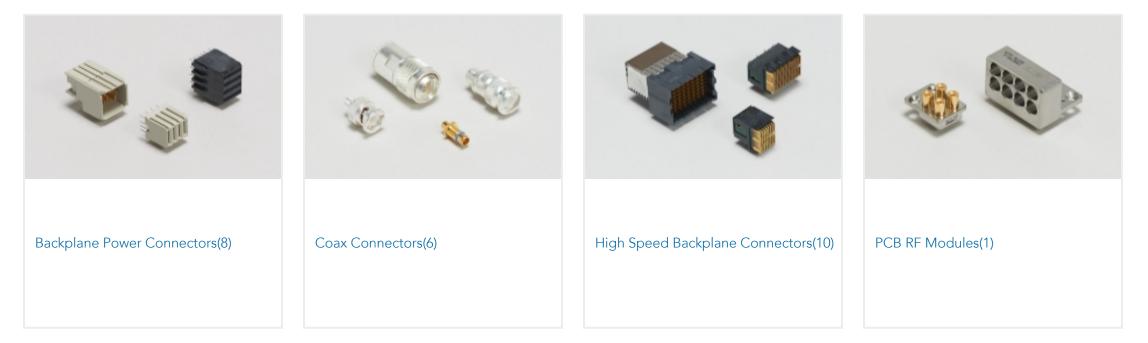


**Customers Also Bought** 

56 Position High Speed Backplane Connector, 7 Row, 8 Column, PCB Mount Header, Right Angle, Unshrouded, 1.8 mm [.075 in] Centerline, MULTIGIG RT 2-S



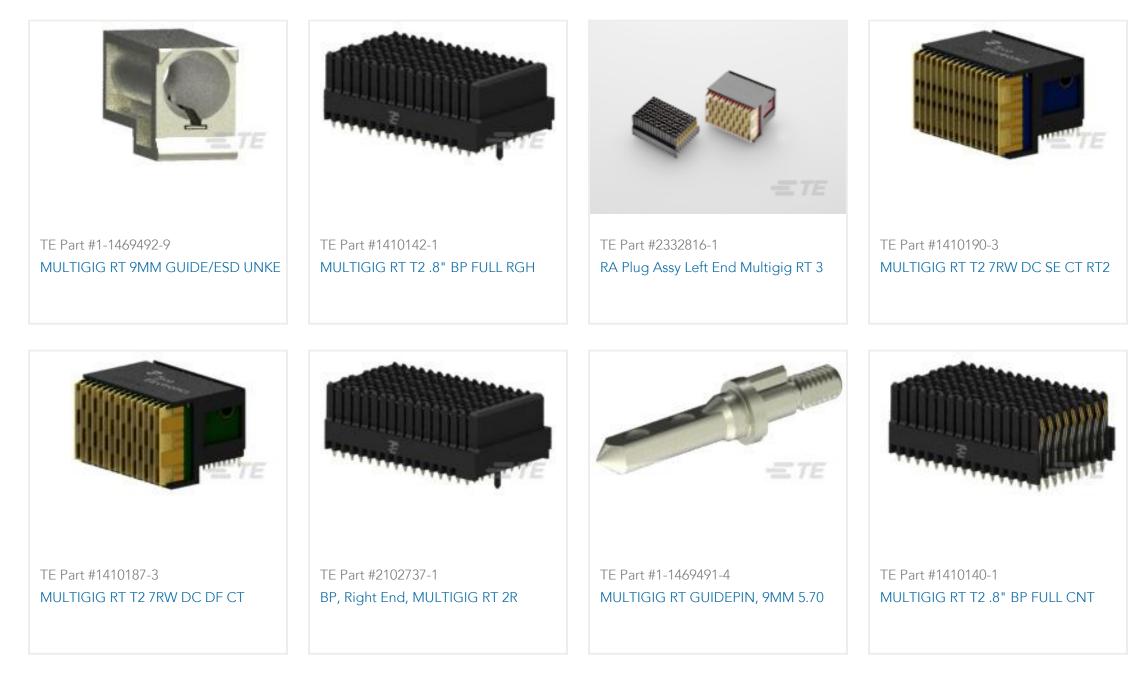

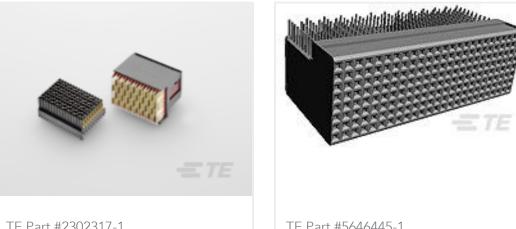

TE Part #2302317-1 RA ASSY, 7 Row, Cent DP, MULTIGIG RT 2-S



## **Documents**

**Product Drawings** RA ASSY, Left Half RTM, MULTIGIG RT 2-S

English

**CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2302321-1\_2.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2302321-1\_2.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2302321-1\_2.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages

**&** For support call+1 800 522 6752

56 Position High Speed Backplane Connector, 7 Row, 8 Column, PCB Mount Header, Right Angle, Unshrouded, 1.8 mm [.075 in] Centerline, MULTIGIG RT 2-S



MULTIGIG RT 3 and RT 2-S Connectors

English

Product Specifications Application Specification

English