




Connectors > Pluggable IO Connectors & Cages > XFP Cage Assemblies and Kits

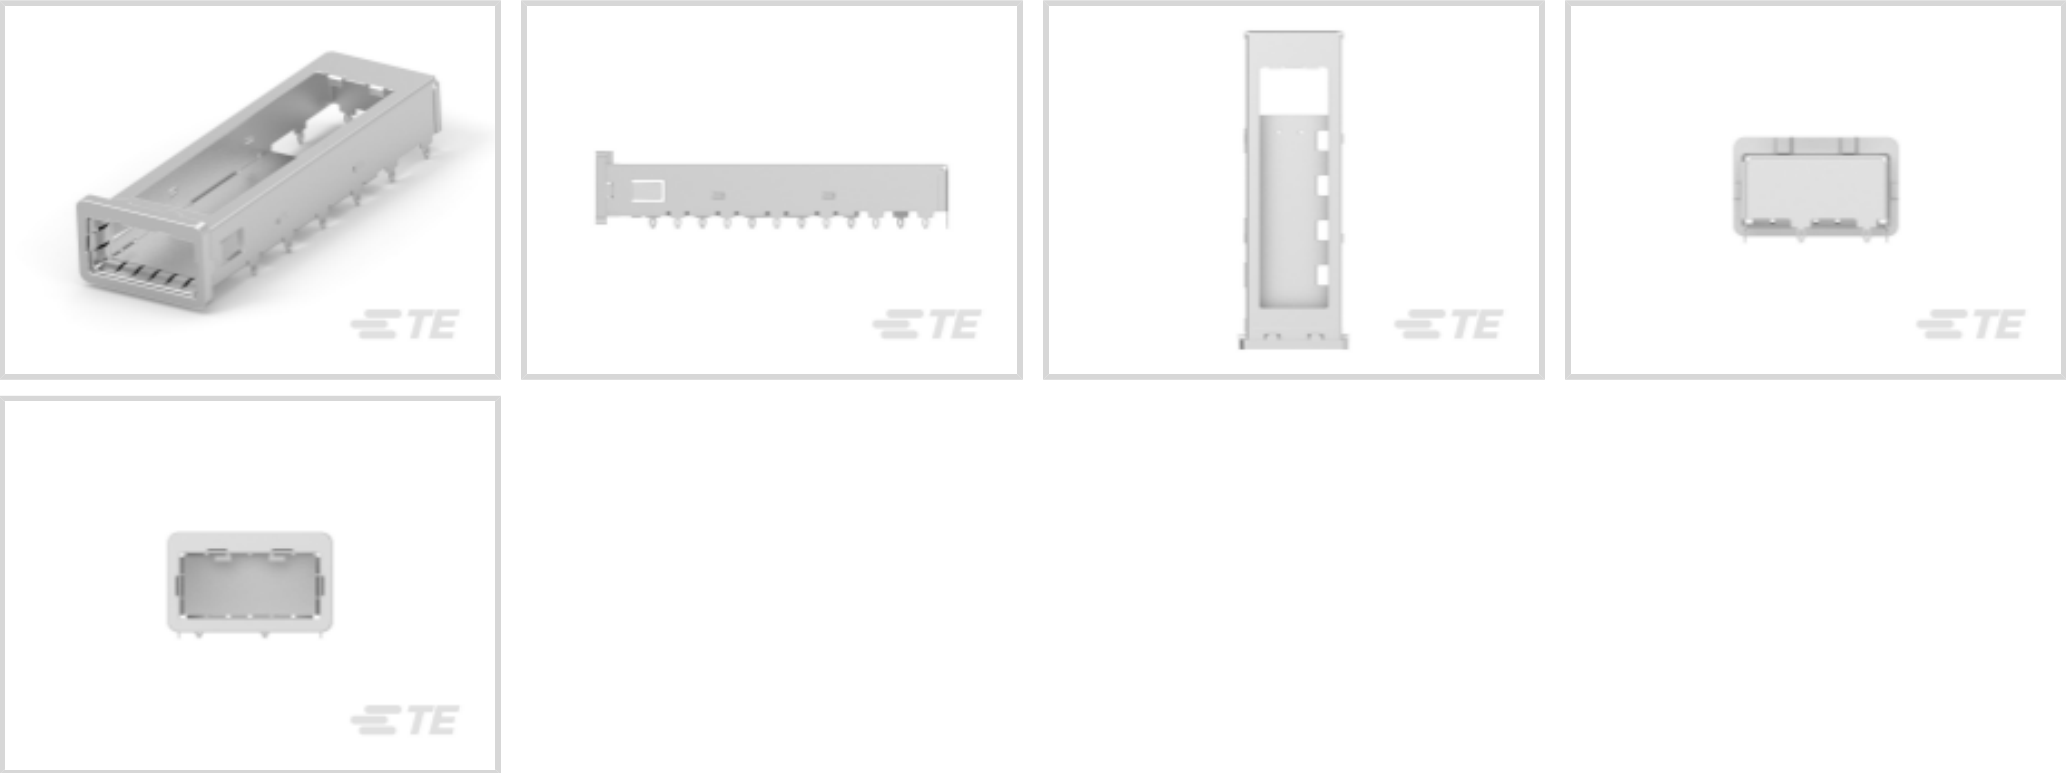

Form Factor: **XFP**
Pluggable I/O Product Type: **Cage Assembly**
Sealable: **Yes**
Circuit Application: **Signal**
Operating Temperature Range: **-10 – 70 °C [14 – 158 °F]**

[All XFP Cage Assemblies and Kits \(22\)](#)

Features

Product Type Features

Cage Type	Single
Form Factor	XFP
Pluggable I/O Product Type	Cage Assembly
Sealable	Yes

Configuration Features

Number of Ports	1
Port Matrix Configuration	1 x 1

Electrical Characteristics

Data Rate (Max)	10 Gb/s
-----------------	---------

Body Features

Cage Plating Material	Tin
Primary Product Material	Aluminum

Contact Features



Contact Mating Area Plating Material	Gold (Au)
--------------------------------------	-----------

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	2.05 mm

Mechanical Attachment

PCB Mounting Style	Double-Sided (Belly-to-Belly)
--------------------	-------------------------------

Housing Features

Housing Material	LCP
Cage Material	Nickel Silver Alloy

Dimensions

Product Width	22 mm
Product Length	64.03 mm

Usage Conditions

Operating Temperature Range	-10 – 70 °C[14 – 158 °F]
-----------------------------	--------------------------

Operation/Application

Heat Sink Compatible	Yes
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Box & Tray
------------------	------------

Other

Included Lightpipe	No
EMI Containment Feature Type	Elastomeric Gasket

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JAN 2025 (247)
Candidate List Declared Against: JAN 2025 (247)
Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1888810-2
EMI/Dust Cover,XFP And QSFP

Also in the Series | XFP

Connector Caps & Covers(1)

Heat Sinks(8)

Pluggable IO Connectors & Cages(25)

XFP(25)

Customers Also Bought



TE Part #1571983-3
GDH02STR04=DIP SWITCH

TE Part #5084616-3
0.8FH,R13H.5,080,08/Sn,TR,SC

TE Part #181949-2
250 FASTON,TAB,TPBR

TE Part #2106003-2
Connector, SMT-IDC, 2 position, 18AWG

TE Part #1-1415899-0
RZ01-1C4-D012

TE Part #640456-4
04P MTA100 HDR ASSY F/L SQ STR

Documents

Product Drawings

XFP CAGE ASSEMBLY, W/O INTERMEDIATE GSKT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2303074-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2303074-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2303074-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English