

DDR4 DIMM

TE Internal #: 2309410-2

Small Outline (SO), 5.2 mm [.205 in] Stack Height, Right Angle
Module Orientation, 200 / 260 Position, DDR4 DIMM, SO DIMM
Sockets

[View on TE.com >](#)



Connectors > Socket Connectors > Memory Sockets > SO DIMM Sockets > DDR4 SO DIMM Sockets



DRAM Type: **Small Outline (SO)**
Stack Height: **5.2 mm [.205 in]**
Module Orientation: **Right Angle**
Number of Positions: **200, 260**
Centerline (Pitch): **.5 mm [.02 in]**

[All DDR4 SO DIMM Sockets \(39\)](#)

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connector System	Cable-to-Board
DRAM Type	Small Outline (SO)

Configuration Features

Number of Keys	1
Number of Rows	2
Module Orientation	Right Angle
Number of Positions	200, 260

Electrical Characteristics

DRAM Voltage	1.2 V
--------------	-------

Signal Characteristics

SGRAM Voltage	1.2 V
---------------	-------

Body Features

Retention Post Location	Both Ends
Retention Post Material	Copper Alloy



Latch Material	High Temperature Thermoplastic
Ejector Type	Locking
Ejector Location	Both Ends
Connector Profile	Low

Contact Features

Contact Current Rating (Max)	.5 A
Contact Underplating Material	Nickel
Memory Socket Type	Memory Card
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Gold Flash
Contact Mating Area Plating Material	Gold (Au)
Contact Mating Area Plating Material Thickness	.127 μm[5 μin]

Termination Features

Insertion Style	Cam-In
Termination Method to PCB	Surface Mount

Mechanical Attachment

Connector Mounting Type	Board Mount
PCB Mount Retention Type	Solder Peg
Mating Alignment Type	Reverse Keying
PCB Mount Retention	With

Housing Features

Housing Material	High Temperature Thermoplastic
Housing Color	Black
Centerline (Pitch)	.5 mm[.02 in]

Dimensions

Stack Height	5.2 mm[.205 in]
Row-to-Row Spacing	8.2 mm[.322 in]

Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards



UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	800
Packaging Method	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





Also in the Series | [DDR4 DIMM](#)




[DIMM Sockets\(25\)](#)



[SO DIMM Sockets\(39\)](#)

Customers Also Bought

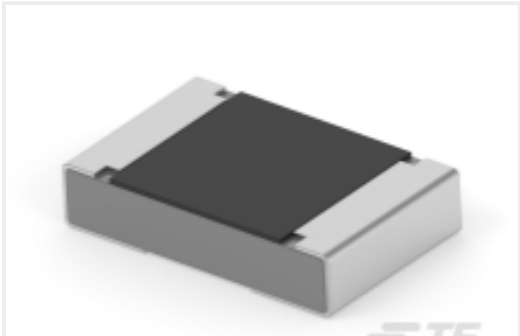

TE Part #2-2176482-9
[RA73F 2A 100R 0.1% 5K RL](#)



TE Part #1-1825955-4
[FSM7JH=6MM TACT SWITCH, HT W /ESD](#)



TE Part #2227582-1
[1X4 R/A ASSY, MINI SAS HD INTERNAL](#)



TE Part #8-1676481-9
[CPF 0603 39K 0.1% 25PPM 1K RL](#)



TE Part #2214869-1
[MiniSAS HD, 1x2 Rec Assy w/ weld](#)



TE Part #6-1879022-1
[SMF3 100K 5%](#)




TE Part #4-641126-0
[10P MTA100 HDR ASY FL/STR LF](#)



TE Part #2081679-1
[SMA JACK RECEPTACLE,PCB,RIGHT ANGLE,6GHZ](#)



TE Part #2-2337815-3
[MINISAS HD TO MINISAS HD,30AWG, 2M](#)

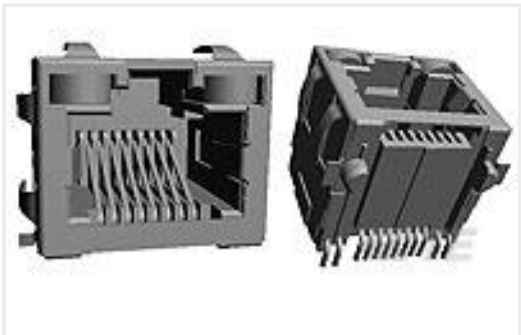

TE Part #6339191-1
[MJ,RJ45,SMT,SHLD,LED \(Y/G\)](#)

Documents

[Product Drawings](#)

[DDR4 SODIMM 260P 5.2H RVS](#)

English

[CAD Files](#)

[3D PDF](#)

3D



Customer View Model

[ENG_CVM_CVM_2309410-2_1.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2309410-2_1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2309410-2_1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English