



Connectors > Automotive Connectors > Automotive Housings > AMPSEAL 16 Housings



Number of Positions: 12

Connector & Housing Type: **Housing for Male Terminals**

Mating Pin Diameter: 1.6 mm [.062 in]

Connector System: **Wire-to-Wire**

Centerline (Pitch): 4.5 mm [.177 in]

[All AMPSEAL 16 Housings \(224\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Number of Positions	12
Number of Rows	2

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------



Nominal Voltage Architecture	12 V
------------------------------	------

Body Features

Cable Exit Angle	180°
Primary Product Color	Gray
Connector & Keying Code	B

Contact Features

Contact Size	1.6mm
Contact Type	Pin
Mating Pin Diameter	1.6 mm[.062 in]

Mechanical Attachment

Strain Relief	Add By Accessory
Terminal Position Assurance	Yes
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	4.5 mm[.177 in]

Dimensions

Row-to-Row Spacing	5.3 mm[.209 in]
Product Width	37.6 mm[1.48 in]
Product Length	47.55 mm[1.872 in]
Connector Height	26.65 mm[1.049 in]

Usage Conditions

Operating Temperature (Max)	150 °C[302 °F]
Operating Temperature Range	-40 – 150 °C[-40 – 302 °F]

Industry Standards

IP Rating	IP67
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Method	Bag
------------------	-----

Other



Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) <b>Article Safe Usage Statements:</b> Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-AM7801-T273  
AMPSEAL 16 CONTACTS



TE Part # CAT-AM7801-CH8172  
AMPSEAL 16 Housings




TE Part # 776441-1  
AS 16, EXTRACTION TOOL



TE Part # 776363-1  
SEALING PLUG, SZ 16 CAVITY


Also in the Series | AMPSEAL 16




Automotive Connector Caps & Covers (5)



Automotive Connector Locks & Position Assurance (6)



Automotive Housings (239)



Connector Backshells (84)




Connector Seals & Cavity Plugs (10)



Data Connectivity Headers (2)



Data Connectivity Housings (3)




Other Automotive Connector Accessories (8)




Rectangular Backshells & Clamps (74)

Customers Also Bought

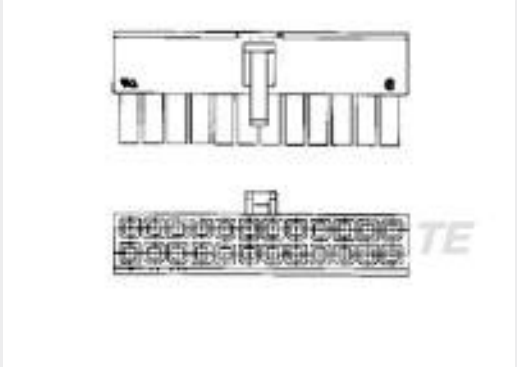

TE Part #794954-8  
8P RCPT VAL-U-LOK V2

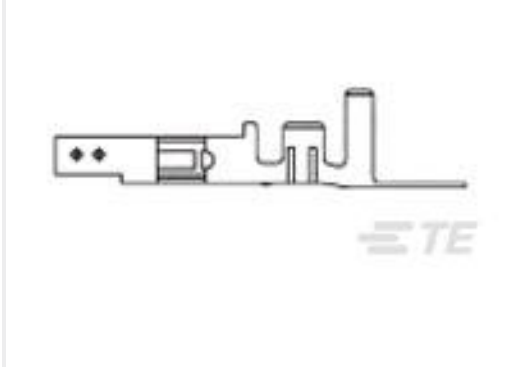

TE Part #794956-1  
VAL-U-LOK SKT BR SN 22-18AWG




TE Part #2320925-2  
AS16, PLUG ASSY, HT, 12P, N SEAL, CODE B



TE Part #CAT-J41-DDRC  
DEUTSCH DT Receptacle Connectors



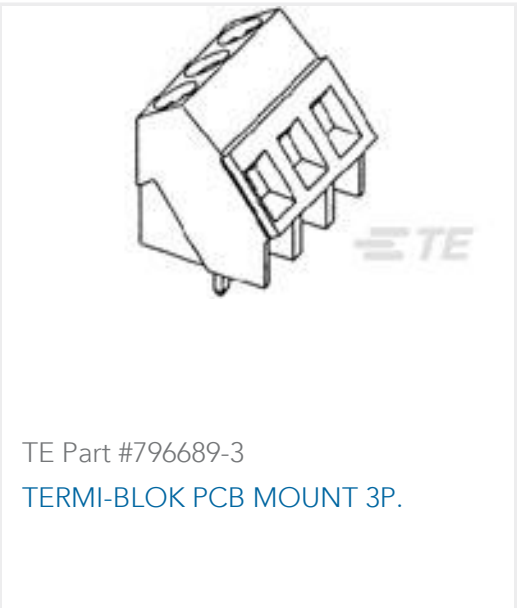

Documents

Product Drawings

AS16,CAP ASSY,HT,12P,N SEAL,CODE B

English

AS16,CAP ASSY,HT,12P,N SEAL,CODE B

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2320918-2\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2320918-2\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2320918-2\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English