



Connectors > Lighting Connectors > Street Lighting Controls > Street Lighting Connectors



Lighting Product Type: **Shorting Cap**
Primary Product Color: **Black**
Product Height: **29.6 mm**
Lighting Connector Features Included: **Keyed, Not Vented**
Compatible With Agency/Standards Products: **UL**

Features

Product Type Features

Lighting Product Type	Shorting Cap
Sealable	Yes

Configuration Features

Lighting Connector Features Included	Keyed, Not Vented
Number of Positions	4

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Current Rating (Max)	5 A
------------------------------	-----

Dimensions

Product Diameter	36.5 mm
Product Height	29.6 mm

Usage Conditions

--	--



Operating Temperature Range	-40 – 90 °C[-40 – 194 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-2343404-1
MODULE ASSY,80MM LUMAWISE S,
KEYED,vented



TE Part # 2-2343404-1
MODULE, 80MM LUMAWISE
ENDURANCE S,KEYED



TE Part # 2341474-2
SEALING CAP, RCPT, LUMAWISE
ENDURANCE S




TE Part # 2341474-1
SEALING CAP, RCPT, LUMAWISE
ENDURANCE S




TE Part # 1-2445583-1
LUMAWISE MOTION - LOGIC
OUTPUT, CIRC.



TE Part # 2382635-1
LUMAWISE POWER INPUT TERMINAL
BLOCK (TB)




TE Part # 2343405-1
MODULE,40MM LUMAWISE
ENDURANCE S. KEYED



TE Part # 2445583-1
LUMAWISE MOTION - LOGIC
OUTPUT, RECT.

Also in the Series | LUMAWISE Endurance S

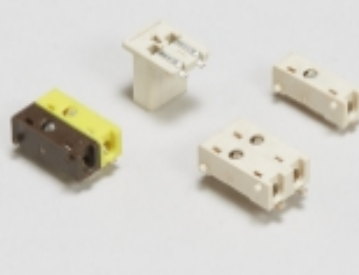

Poke-In Connectors(1)




Street Lighting Connectors(47)



Street Lighting Power Management(5)


Customers Also Bought



TE Part #DTM12S-BT
BOOT, 12P, PLG, ST, GRY



TE Part #HDP24-18-20PN
REC, 20P, BLK, N, 16/20, P



TE Part #1-2445583-1
LUMAWISE MOTION - LOGIC
OUTPUT, CIRC.



TE Part #3-2176337-7
CRGCQ 0402 10K 1%




TE Part #2341474-3
SEALING CAP, RCPT, LUMAWISE
ENDURANCE S



TE Part #1060-16-1222
PIN, SF, SIZE 16, 12-16, NI/SN



TE Part #2834385-2
RELEASE POKE-IN
CONNECTOR_2P_NATURAL



TE Part #2834049-3
REC, 2P LATCHED POKE-IN WTW
CONN.OE



TE Part #2363638-2
[Receipt, LUMAWISE Endurance S2 Kit, KeyA](#)



TE Part #1956226-3
[RE035005](#)

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_2343403-1_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2343403-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2343403-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[LUMAWISE STREET LIGHT DIMMING AND CONTROL QUICK REFERENCE GUIDE](#)

English

[Datasheet - Lumawise Z10](#)

English

[Lumawise Endurance S Modules](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL_EU_CERT_EN_61984_UL_EU_01778_M1_C1](#)

English

[CB_CERT_IEC_61984_US_34131_M1_UL_C1](#)

English

[CB_CERT_US_34131_M1_UL_4788988643_TR_C1](#)

English