



Connectors > Connector Accessories > Connector Seals & Cavity Plugs



Operating Temperature Range: -40 – 125 °C [-40 – 257 °F]

Primary Product Color: **Gray**

Primary Product Material: **PBT GF20**

Operating Temperature (Max): 125 °C [257 °F]

Features

Body Features

Primary Product Color	Gray
Primary Product Material	PBT GF20

Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operating Temperature (Max)	125 °C[257 °F]

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC



Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2-2350891-2
20POS,HYBRID,PIN HSG ASSY,SLD,
COD B



TE Part # 2-2350891-1
20POS,HYBRID,PIN HSG ASSY,SLD,
COD A



TE Part # 1-2350891-2
20POS,HYBRID,PIN HSG ASSY,SLD,
COD B



TE Part # 1-2350891-3
20POS,HYBRID,PIN HSG,SLD,COD C



TE Part # 2-2350891-4
20POS,HYBRID,PIN HSG ASSY,SLD,
COD D



TE Part # 2-2350891-3
20POS,HYBRID,PIN HSG,SLD,COD C



TE Part # 1-2350891-4
20POS,HYBRID,PIN HSG ASSY,SLD,
COD D



TE Part # 1-2350891-1
20POS,HYBRID,PIN HSG ASSY,SLD,
COD A

Also in the Series | DEUTSCH NTSEAL




Automotive Housings(68)



Connector Backshells(7)



Connector Seals & Cavity Plugs(8)

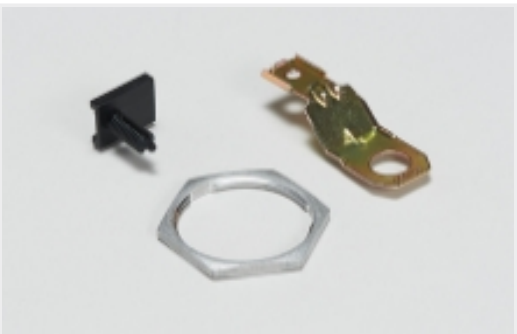

Other Automotive Connector
Accessories(7)

Customers Also Bought



TE Part #2366494-1
48POS, HYBRID, SOC HSG ASSY, SLD, COD A

TE Part #DT04-08PA-C017
REC, 8P, GRY, BLOCKED, A

TE Part #1-2405028-1
26POS, HYBRID, PIN HSG ASSY, SLD, COD A

TE Part #2428520-1
CVTY PLUG, PIN DIA 2.5, CVTY DIA, 4.0, PUR

TE Part #2373921-4
CVTY PLUG, PIN DIA 1.6, CVTY DIA, 2.0, GRN

TE Part #2-2366509-1
48POS, HYBRID, PIN HSG ASSY, SLD, COD A

TE Part #2-2350891-1
20POS, HYBRID, PIN HSG ASSY, SLD, COD A

TE Part #2350890-1
20POS, HYBRID, SOC HSG ASSY, SLD, COD A

TE Part #2366517-4
FIX RING, CONN KIT

TE Part #2137752-1
Lever for 154P ECU connector

Documents

Product Drawings
FIX RING, CONN KIT

English

CAD Files
3D PDF

3D

Customer View Model
ENG_CVM_CVM_2350943-2_A.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_2350943-2_A.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_2350943-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



NTSEAL Sealed Wire-to-Wire Connectors

English

Product Specifications

Application Specification

English