

#### M12 Connector

TE Internal #: 2358990-1 Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector

#### View on TE.com >

#### Connectors > Circular Connectors > Standard Circular Connectors





Number of Positions: 4

Connector System: Cable-to-Cable

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Contact Current Rating (Max): 4A

### Features

### Product Type Features

Assembly Requirement	Factory Assembled
Circular Connector Shell Type	Metal-Shell
Connector Product Type	Connector Assembly
Assembly Type	Electrical Connector
Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Metal
Configuration Features	
Keying & Polarized Position Locations	D
Factory Installed Backshell	With
Number of Positions	4
Number of Power Positions	0

Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector



Number of Signal Positions	4
Contacts Preloaded	No
Electrical Characteristics	
Operating Voltage	250 VDC
Body Features	
O-Ring Material	Silicone
Environmental Protection	IP67
Environmental Protection Type	Elastomer Sealed
Primary Product Color	Black
Peripheral Seal Material	Silicone
Shell Plating Material	Nickel
Shell Base Material	Copper Alloy
Circular Connector Insulation Material Type	Nylon
Hermetically Sealed	Yes
Contact Features	
Contact Current Rating (Max)	4 A
Circular Connector Contact Type	Socket

### Mechanical Attachment

Mating Retention Type	Threaded Coupling
Mating Alignment	With
Polarization Code	D
Mating Alignment Type	1 Кеу
Housing Features	
Circular Connector Shell Size	20
Dimensions	
Wire Size	22 – 18 AWG
Usage Conditions	
IP Dust Sealing Level	6
IP Water Sealing Level	IP67
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Durability Rating	100 Cycles

Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector



Circuit Application	
Circuit Application	Signal
Shielded	Yes
ndustry Standards	
UL Flammability Rating	UL 94V-0
Other	
Field Serviceable	Yes
Position Locations Omitted	0
•	
•	Compliant with Exemptions
or compliance documentation, visit the product page on TE.com>	Compliant with Exemptions Compliant with Exemptions

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**

Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector






# Also in the Series | M12 Connector

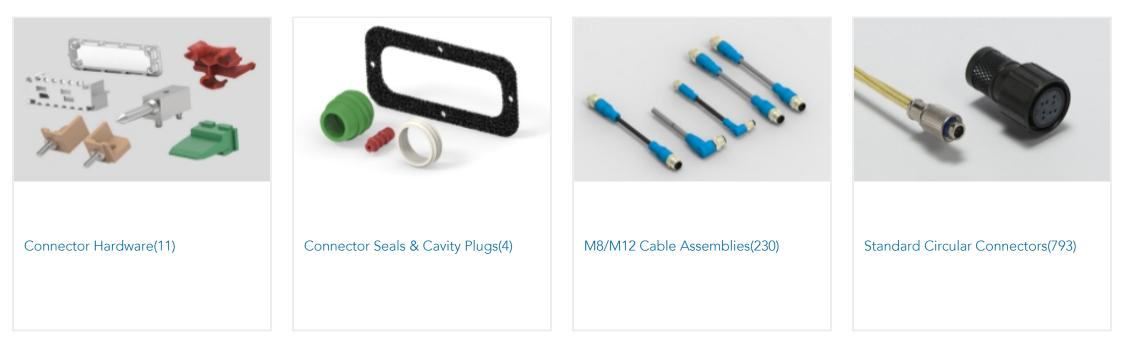

# Customers Also Bought

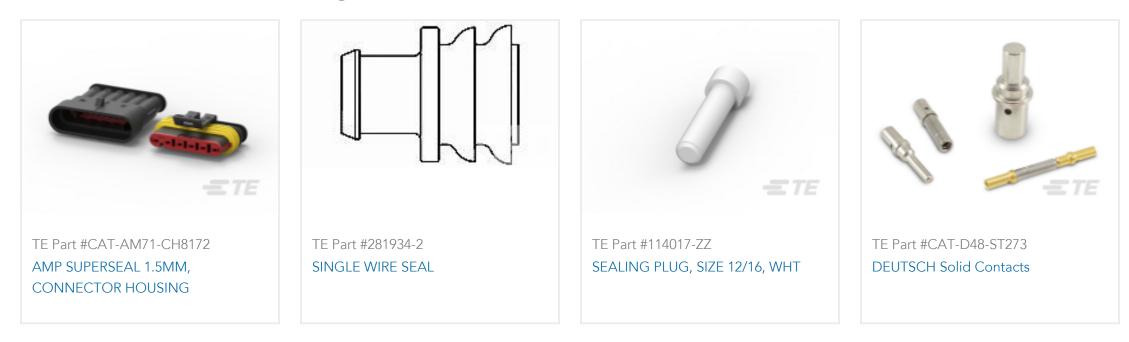



### Documents

# Product Drawings M12 FEMALE,D4,STR CONNECTOR, PG7 SEAL English

### **CAD** Files

3D PDF

3D

Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector



**Customer View Model** 

ENG\_CVM\_CVM\_2358990-1\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2358990-1\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2358990-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English

**Application Specification** 

English