

Sliver for SFF-TA-1002

TE Internal #: 2361358-1


Sliver Cable Assembly, 140 Position, .5 m, 20 Gb/s, 33 AWG, Sliver Plug End A, Sliver Plug End B, High Speed, 12 Power Positions, 128

Signal Positions

View on TE.com >



Cable Assemblies > Copper Cable Assemblies > Internal I/O Cable Assemblies

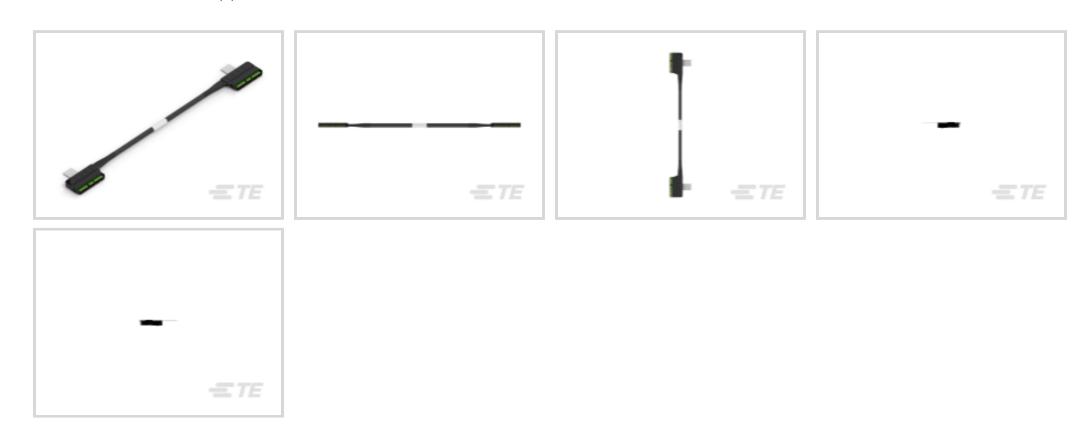

Cable Assembly Type: Sliver
Number of Positions: 140
Cable Assembly Length: .5 m

Data Rate: 20 Gb/s

Cable Style: Discrete Pair

Features

Product Type Features

Troduct Type reduces	
Cable Assembly Type	Sliver
Cable Style	Discrete Pair
Cable Assembly (End A)	Sliver Plug
Cable Assembly (End B)	Sliver Plug
Cable Assembly Category	High Speed
Configuration Features	
Number of Positions	140
Number of Power Positions	12
Number of Signal Positions	128
Electrical Characteristics	
Impedance	85 Ω
Signal Characteristics	
Data Rate	20 Gb/s



Dimensions

Wire Size	33 AWG	

Operation/Application

Other

Cable Assembly Configuration	Double Ended
Cable Assembly Length	.5 m

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: 1-BUTANESULFONIC ACID, 1,1,2,2,3,3,4,4,4-NONAFLUORO-, POTASSIUM SALT (1:1) (.25% in 16552602939) UV-329 (.5% in 16552602939) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach




Compatible Parts



Also in the Series | Sliver for SFF-TA-1002

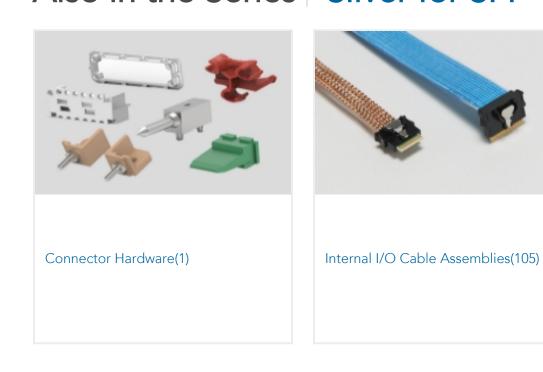

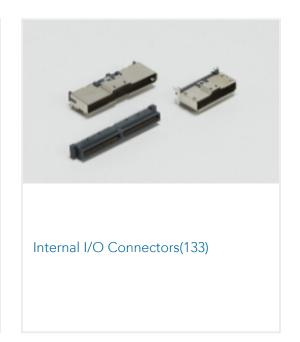

Customers Also Bought























Documents

Product Drawings

C/A, Sliver 2.0 4C, LA to LA, 0.5M

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2361358-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2361358-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2361358-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

English