2362760-2 - ACTIVE

TE Internal #: 2362760-2 Circular RJ45 Connector, Single Port, Plug, Shielded, Cat 5e, 8 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, High Speed Data, Black, PBT

View on TE.com >



Connectors > Modular Jacks & Plugs > RJ45 Connectors



Modular Jack & Plug Interface Type: Circular RJ45 Port Configuration: Single Port

Modular Jacks & Plugs Products: RJ Type Jacks & Plugs

Connector Contact Density: Standard

Modular Connector Style: Plug

Features

Product Type Features

Modular Jack & Plug Interface Type	Circular RJ45
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Plug
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Port Configuration	Single Port
Connector Contact Density	Standard
Number of Positions	8
Number of Loaded Positions	8
Body Features	
Insulator Material	Polymer
Contact Features	
Contact Underplating Material	Nickel
Contact Current Rating (Max)	1.2 A

2362760-2

Circular RJ45 Connector, Single Port, Plug, Shielded, Cat 5e, 8 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, High Speed Data, Black, PBT



Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	1.27 mm[.05 in]
Housing Color	Black
Housing Material	PBT
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Indicator Type	No Indicator
Shielded	Yes
Circuit Application	High Speed Data
Industry Standards	

UL 94V-0
Cat 5e
1
Bag
Compliant
Out of Scope
No Restricted Materials Above Threshold
Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC

IP67

IP Rating

2362760-2

Circular RJ45 Connector, Single Port, Plug, Shielded, Cat 5e, 8 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, High Speed Data, Black, PBT



Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 2355443-2

Customers Also Bought

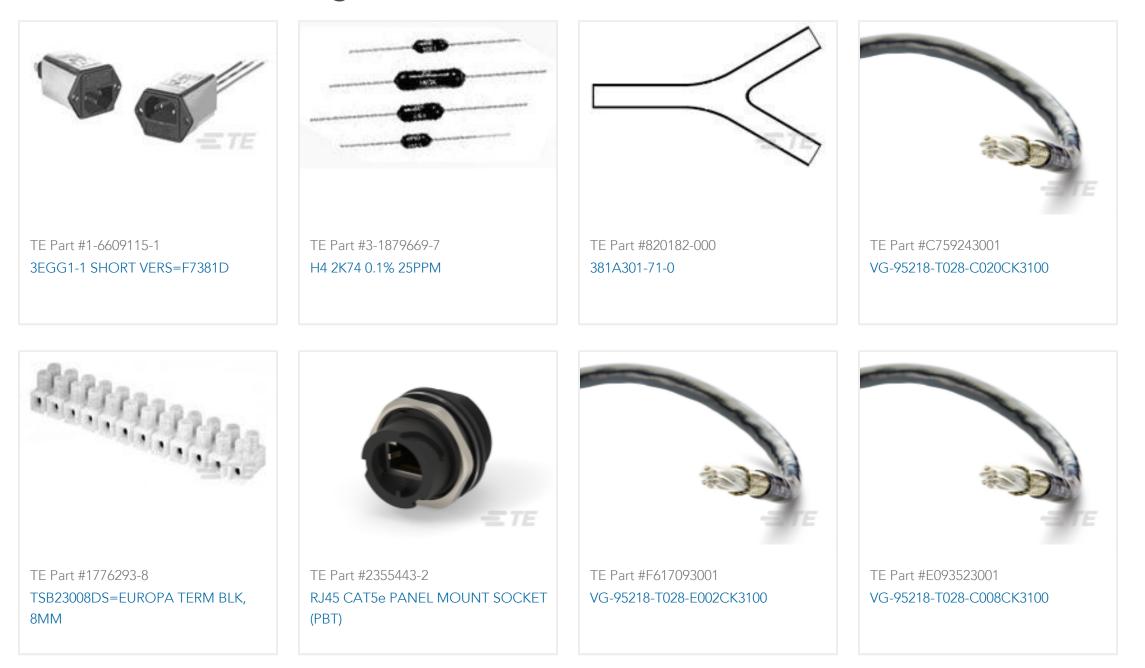

2362760-2

Circular RJ45 Connector, Single Port, Plug, Shielded, Cat 5e, 8 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, High Speed Data, Black, PBT





Documents

Product Drawings IDC PLUG, PBT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2362760-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2362760-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2362760-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English