

HIVONEX | Charging Inlets

TE Internal #: 2430432-1 7 Position, Black - Orange, Sealing Cover, PA GF, 180° Cable Exit, -40 – 85 °C [-40 – 185 °F], Charging Inlets

View on TE.com >

Connectors > Automotive Connectors > Automotive Connector Accessories > Automotive Connector Caps & Covers >

High-Power Charging CCS1 and CCS2 Inlet Kits





Number of Positions: 7 Primary Product Color: Black - Orange Protection & Strain Relief Accessory Type: Sealing Cover Primary Product Material: PA GF Cable Exit Angle: 180°

All High-Power Charging CCS1 and CCS2 Inlet Kits (47)



Features

Product Type Features

Sealable	Yes
Protection & Strain Relief Accessory Type	Sealing Cover
Configuration Features	
Number of Positions	7
Body Features	
Primary Product Color	Black - Orange
Primary Product Material	PAGF
Cable Exit Angle	180°
Mechanical Attachment	
Strain Relief	With
Usage Conditions	
Operating Temperature (Max)	85 °C[185 °F]

2430432-1

7 Position, Black - Orange, Sealing Cover, PA GF, 180° Cable Exit, -40 – 85 °C [-40 – 185 °F], Charging Inlets



Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Industry Standards	
IP Rating	IP67
Packaging Features	
Packaging Method	Bag & Box
Packaging Quantity	1
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
For compliance documentation, visit the product page on TE.com>	
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025
	(247) Not Yet Reviewed
Halogen Content	(247)
Halogen Content Solder Process Capability	(247) Not Yet Reviewed

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts

2430432-1

7 Position, Black - Orange, Sealing Cover, PA GF, 180° Cable Exit, -40 – 85 °C [-40 – 185 °F], Charging Inlets




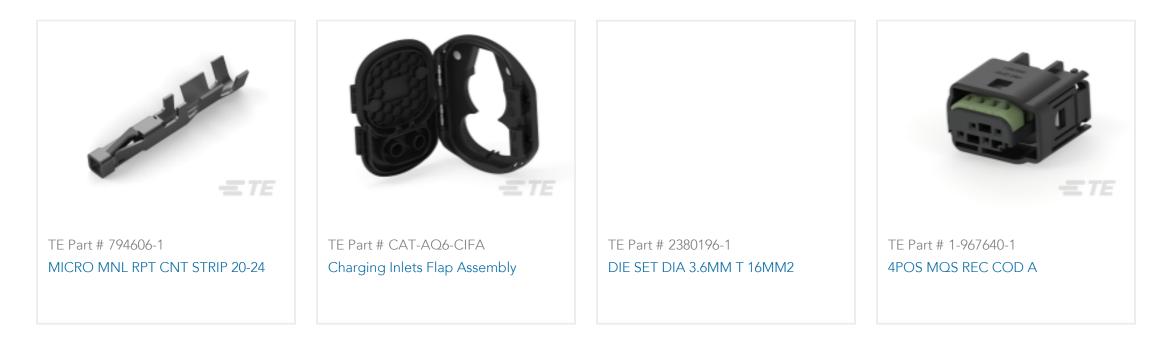



Also in the Series | Charging Inlets












Automotive Terminals(2)

(56)

Automotive Connector Locks & Position Assurance(1)

Automotive Housings(30)

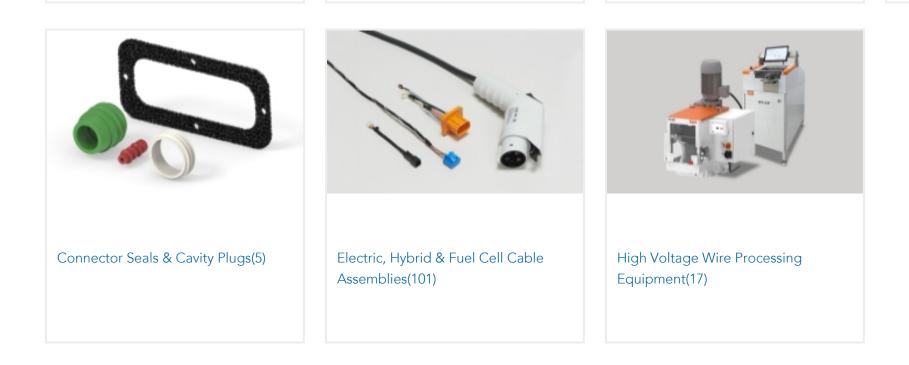

Documents

Product Drawings COMBO 1, CHARGE INLET KIT 120SQMM, W/ LED English **CAD** Files 3D PDF 3D **Customer View Model**

C For support call+1 800 522 6752

2430432-1

7 Position, Black - Orange, Sealing Cover, PA GF, 180° Cable Exit, -40 – 85 °C [-40 – 185 °F], Charging Inlets



ENG_CVM_CVM_2430432-1_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2430432-1_A1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2430432-1_A1.3d_igs.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications Application Specification

English