




Terminals & Splices > Quick Disconnects

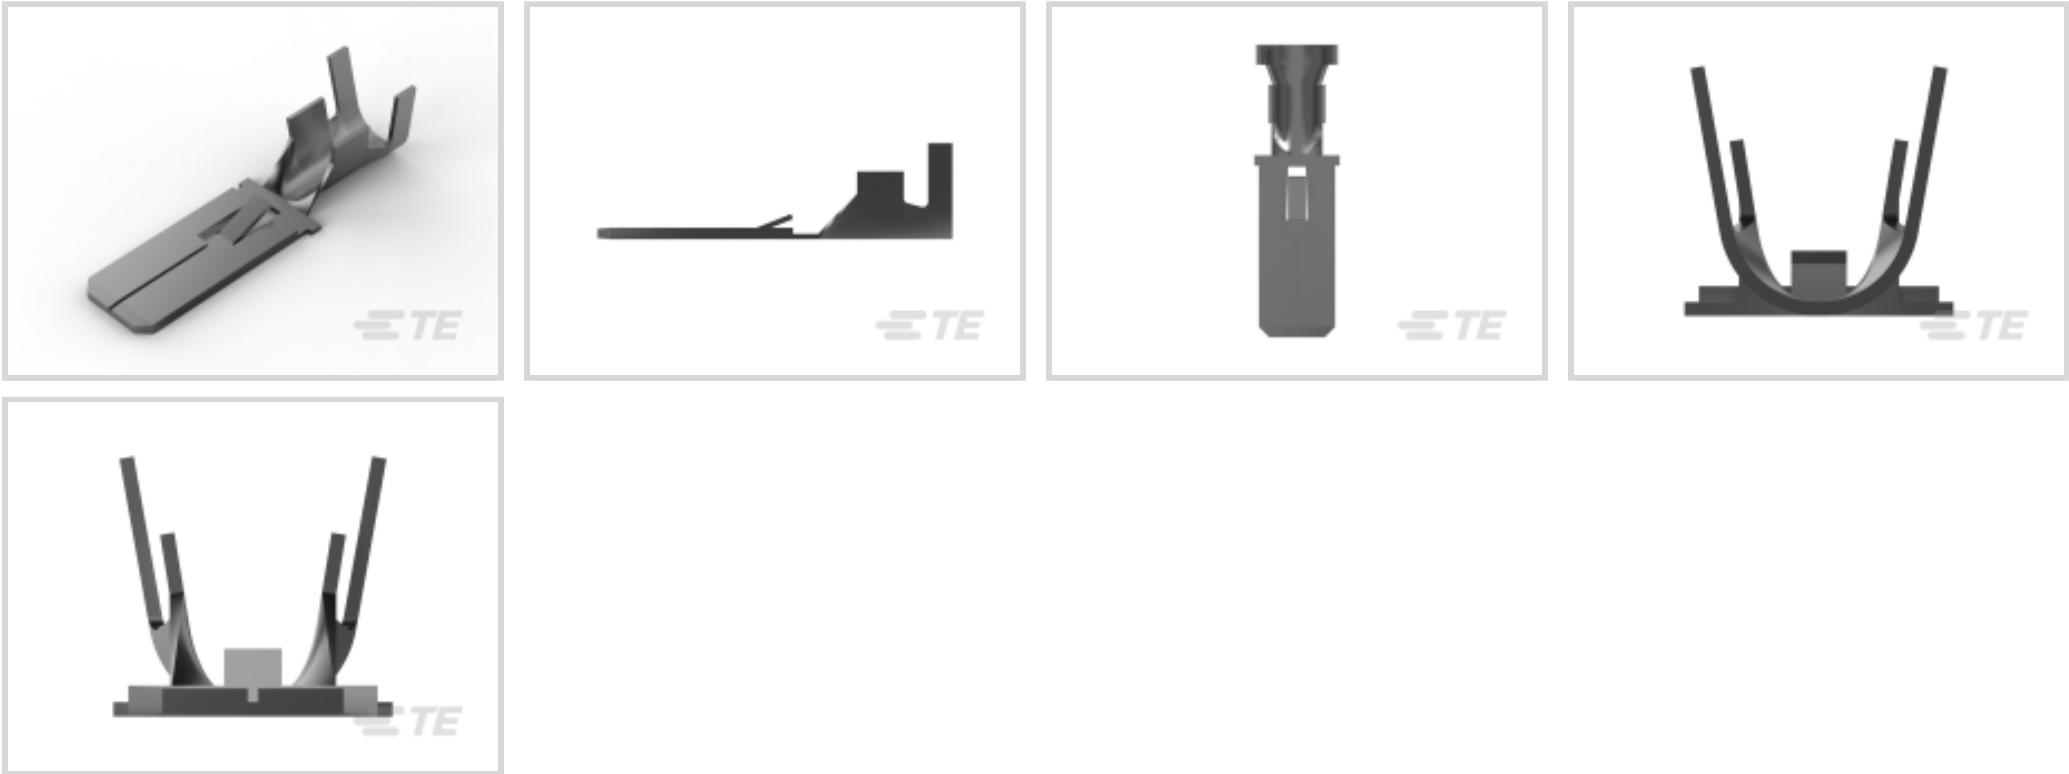

Quick Disconnect Terminal Type: **Tab**

Wire Size: **5 – 7 mm²**

Mating Tab Width: **9.53 mm [.375 in]**

Mating Tab Thickness: **1.22 mm [.048 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Electrical Characteristics

Voltage Rating	250 V
----------------	-------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	9.53 mm[.375 in]
Mating Tab Thickness	1.22 mm[.048 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	1.4 mm
Wire Insulation Support	With
Mating Retention Type	Locking Lance

Dimensions

Product Length	37.4 mm[1.47 in]
Compatible Insulation Diameter Range	5 – 7 mm[.197 – .276 in]
Terminal Material Thickness	.56 mm[.022 in]
Wire Size	5 – 7 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	1000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 151667-2
FF 375 REC 4-6MM2 TPBR



TE Part # 280080-1
FF 250 TAB 4-6MM2 BR



TE Part # 281091-2
FF 375 REC 6-10MM2 TPBR



TE Part # 280756-4
FF 375 REC 3-6MM2 TPPB



TE Part # 280755-4
FF 375 REC 6-10MM2 TPPB



TE Part # 280755-2
FF 375 REC 6-10MM2 TPBR



TE Part # 280075-2
FF 375 TAB 3-6MM2 PTBR




TE Part # 180352-2
FF 250 TAB 4-6MM2 PTBR



TE Part # 280756-2
FF 375 REC 3-6MM2 TPBR

Also in the Series | FASTIN-FASTON 375

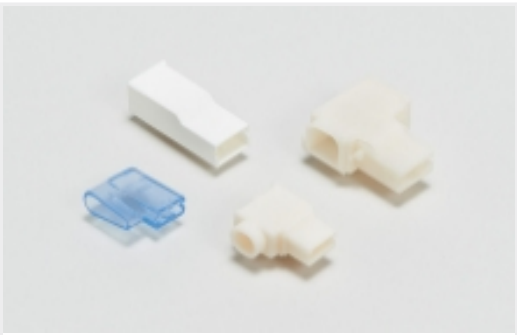

Crimp Terminal Housings(7)



Insertion & Extraction Tools(1)




Quick Disconnects(16)

Customers Also Bought




TE Part #1-1623930-8
CFR25 5% 150R

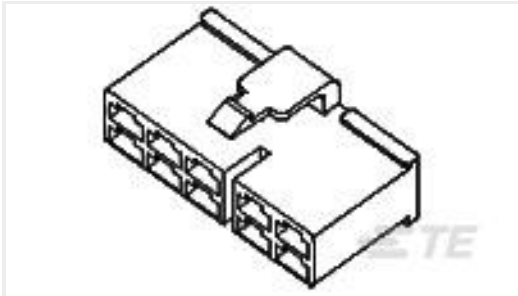


TE Part #172138-1
FF 250 PLUG HSG 10P NYLON NAT




TE Part #281091-2
FF 375 REC 6-10MM2 TPBR

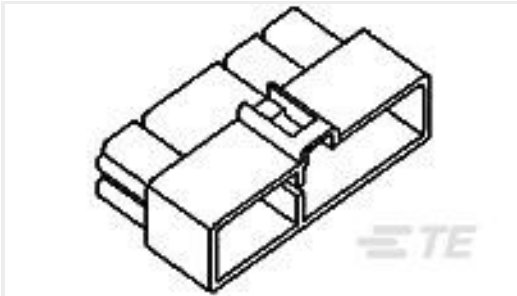

TE Part #172137-1
FF 250 REC HSG 10P NYLON NAT

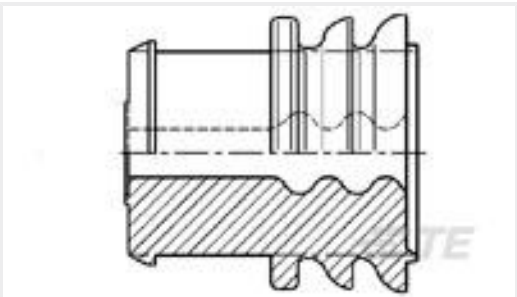

TE Part #963244-1
EINZELDRAHTDICHTUNG

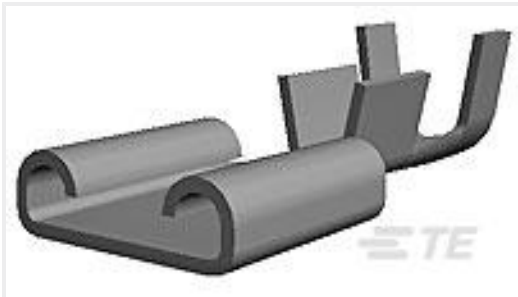


TE Part #280001-9
250 FASTON,REC.,14-17 AWG,TPBR



TE Part #280755-2
FF 375 REC 6-10MM2 TPBR



TE Part #967558-1
J-P-T GEH 24P,ASSY

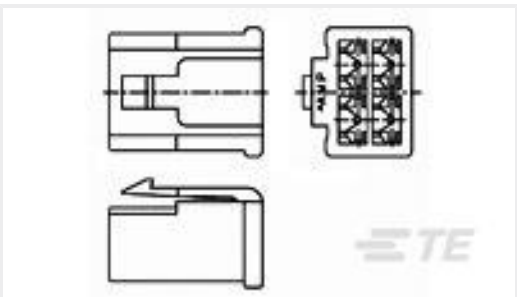

TE Part #174202-1
250 FASTON HSG.,REC.,4 POS, NATRUAL



TE Part #174204-1
250 FASTON HSG.,REC.,6 POS, NATRUAL

Documents

Product Drawings

FF 375 TAB 6-10MM2 PTBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_280074-2_N.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_280074-2_N.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_280074-2_N.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

[Application Specification](#)

English