FASTIN-FASTON | FASTIN-FASTON 250

TE Internal #: 280080-1

TE Internal Description: FF 250 TAB 4-6MM2 BR

View on TE.com >



Terminals & Splices > Quick Disconnects











Quick Disconnect Terminal Type: Tab

Wire Size: 4-6 mm²

Mating Tab Width: 6.35 mm [.25 in] Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

Insertion Force	Normal
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single
Electrical Characteristics	
Voltage Rating	250 V
Contact Features	
Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp
Barrel Type	Open



Product Terminates To	Wire & Cable
Mechanical Attachment	
Locking Lance Height	1.5 mm
Wire Insulation Support	With
Mating Retention Type	Locking Lance
Dimensions	
Product Length	30.1 mm[1.185 in]
Compatible Insulation Diameter Range	3.4 – 5.2 mm[.134 – .205 in]
Terminal Material Thickness	.41 mm[.016 in]
Wire Size	4 – 6 mm²
Usage Conditions	
Usage Conditions Insulation Option	Uninsulated
	Uninsulated -40 – 110 °C[-40 – 230 °F]
Insulation Option	
Insulation Option Operating Temperature Range	
Insulation Option Operating Temperature Range Industry Standards	-40 – 110 °C[-40 – 230 °F]
Insulation Option Operating Temperature Range Industry Standards UL Flammability Rating	-40 – 110 °C[-40 – 230 °F]

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | FASTIN-FASTON 250

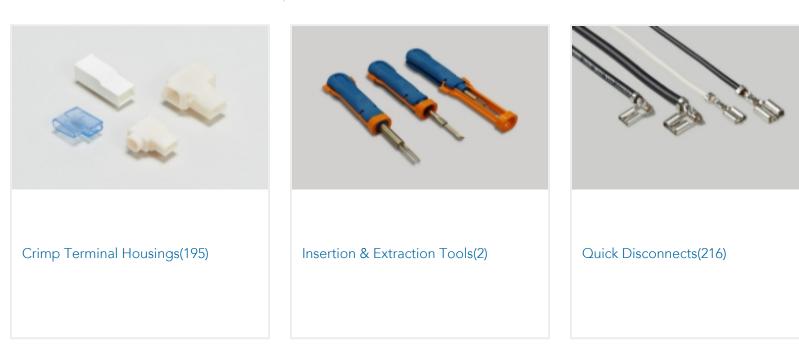

Customers Also Bought












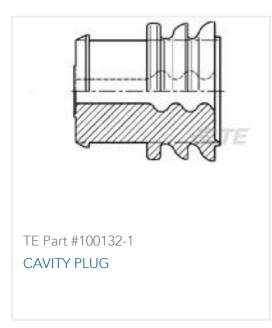









Documents

Product Drawings

FF 250 TAB 4-6MM2 BR

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_280080-1_Z.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_280080-1_Z.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_280080-1_Z.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

1654742_HOUSEHOLD_APPLIANCES_RAST5

English

Product Specifications

Application Specification

English