282104-1 🗸 ACTIVE


AMP | AMP Superseal 1.5mm Series

TE Internal #: 282104-1 2 Position Housing, Housing for Male Terminals, Wire-to-Wire, 6 mm [.236 in] Centerline, Sealable, Black, Wire & Cable, AMP Superseal 1.5mm Series

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING

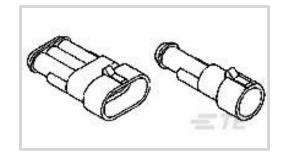

Number of Positions: 2

Connector & Housing Type: Housing for Male Terminals

Mating Tab Width: 1.5 mm [.059 in]

Connector System: Wire-to-Wire

Centerline (Pitch): 6 mm [.236 in]

All AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING (19)

Features

Product Type Features

Mixed & Hybrid Connector

No

Connector Shape

Rectangular

Connector & Housing Type	Housing for Male Terminals	
Connector System	Wire-to-Wire	
Sealable	Yes	
Primary Locking Feature	Integrated in Housing	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Number of Positions	2	
Number of Rows	1	
Electrical Characteristics		
Operating Voltage	24 VDC	
Body Features		
Cable Exit Angle	180°	
Primary Product Color	Black	
Connector & Keying Code	Neutral	

2 Position Housing, Housing for Male Terminals, Wire-to-Wire, 6 mm [.236 in] Centerline, Sealable, Black, Wire & Cable, AMP Superseal 1.5mm Series



Contact Features

Contact Size	1.5mm
Contact Type	Tab
Mating Tab Width	1.5 mm[.059 in]
Contact Current Rating (Max)	14 A
Mechanical Attachment	
Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Polarizing Rib
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PA 66 GF
Centerline (Pitch)	6 mm[.236 in]
Dimensions	
Product Width	19.8 mm[.78 in]
Product Length	42 mm[1.654 in]
Connector Height	13.8 mm[.543 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
IP Rating	ΙΡ67, ΙΡΧ6Κ, ΙΡΧ9Κ
Packaging Features	
Packaging Quantity	1500
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

2 Position Housing, Housing for Male Terminals, Wire-to-Wire, 6 mm [.236 in] Centerline, Sealable, Black, Wire & Cable, AMP Superseal 1.5mm Series



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant		
EU ELV Directive 2000/53/EC	Compliant		
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold		
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC		
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free		


Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

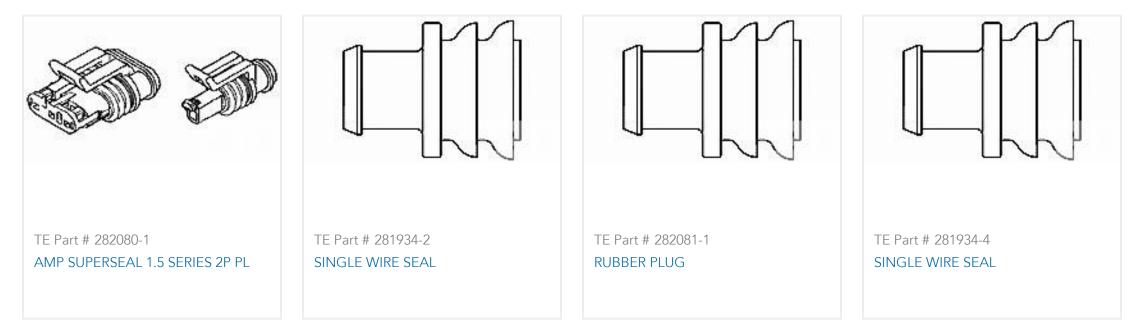

2 Position Housing, Housing for Male Terminals, Wire-to-Wire, 6 mm [.236 in] Centerline, Sealable, Black, Wire & Cable, AMP Superseal 1.5mm Series








Also in the Series | AMP Superseal 1.5mm Series



Connector	Cups a c	

(1)

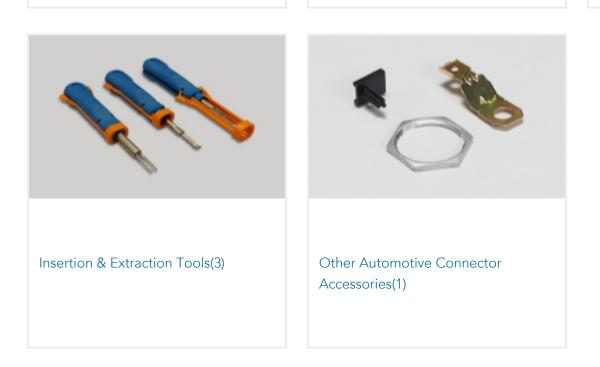

Customers Also Bought



2 Position Housing, Housing for Male Terminals, Wire-to-Wire, 6 mm [.236 in] Centerline, Sealable, Black, Wire & Cable, AMP Superseal 1.5mm Series



Documents

Product Drawings AMP SUPERSEAL 1.5 SERIES 2P CA

English

CAD Files

Customer View Model ENG_CVM_CVM_282104-1_B1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_282104-1_B1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_282104-1_B1.3d_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

AMP SUPERSEAL 1.5mm Connector System

English

ICT Terminals and Connectors Catalogue

English

Product Specifications

Product Specification

English

Instruction Sheets
AMP SUPERSEAL 1.5 SERIES

English

Customer Manual (non U.S.)

English