292156-6 • ACTIVE


AMP CT

TE Internal #: 292156-6 Connector Assembly, Plug to Plug Relay Header, Wire-to-Board / Wire-to-Wire, 5 Position, 2 mm [.078 in] Centerline, 1 Row, White, Signal, AMP CT

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

CT Relay Header Assembly: Free Hanging

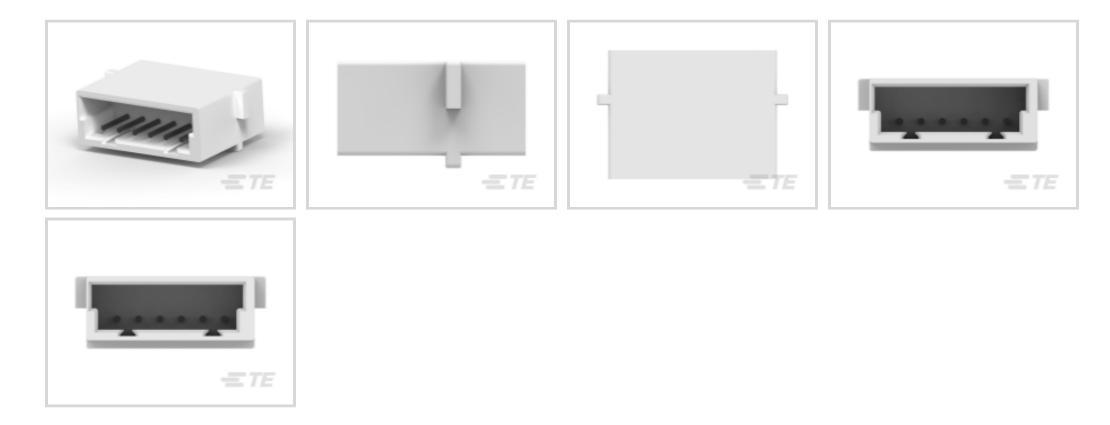

Connector Product Type: Connector Assembly

Connector & Housing Type: Plug to Plug Relay Header

Connector System: Wire-to-Board, Wire-to-Wire

Number of Positions: 5

Centerline (Pitch): 2 mm [.078 in]

All CT Relay Header Assembly: Free Hanging (17)



Features

Product Type Features

Connector Product Type	Connector Assembly
Connector & Housing Type	Plug to Plug Relay Header
Connector System	Wire-to-Board, Wire-to-Wire
Sealable	No
Configuration Features	
Number of Positions	5
Number of Rows	1
Electrical Characteristics	
Operating Voltage	125 V
Body Features	
Primary Product Color	White

Connector Assembly, Plug to Plug Relay Header, Wire-to-Board / Wire-to-Wire, 5 Position, 2 mm [.078 in] Centerline, 1 Row, White, Signal, AMP CT



Contact Features

Contact Retention Within Housing	Without
Contact Base Material	Brass
Contact Type	Pin
Contact Current Rating (Max)	2 A
Mechanical Attachment	
Strain Relief	Without
Panel Mount Feature	Without
Mating Retention	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Nylon 66
Centerline (Pitch)	2 mm[.078 in]
Dimensions	
Panel Thickness (Recommended)	.81 – 1.6 mm[.032 – .063 in]
Connector Height	12 mm[.472 in]
Connector Length	15.8 mm[.622 in]

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Compatible With Agency/Standards Products	CSA, UL
UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL
Packaging Features	
Packaging Method	Bag & Box
Packaging Quantity	400
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant

C For support call+1 800 522 6752

Connector Assembly, Plug to Plug Relay Header, Wire-to-Board / Wire-to-Wire, 5 Position, 2 mm [.078 in] Centerline, 1 Row, White, Signal, AMP CT



EU ELV Direct	tive 2000/53/EC	Compliant
China RoHS 2	Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Re	egulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Melamine (3% in 23796019081) Aticle Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Cont	tent	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Proces	s Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


Compatible Parts



Also in the Series AMP CT

Connector Assembly, Plug to Plug Relay Header, Wire-to-Board / Wire-to-Wire, 5 Position, 2 mm [.078 in] Centerline, 1 Row, White, Signal, AMP CT



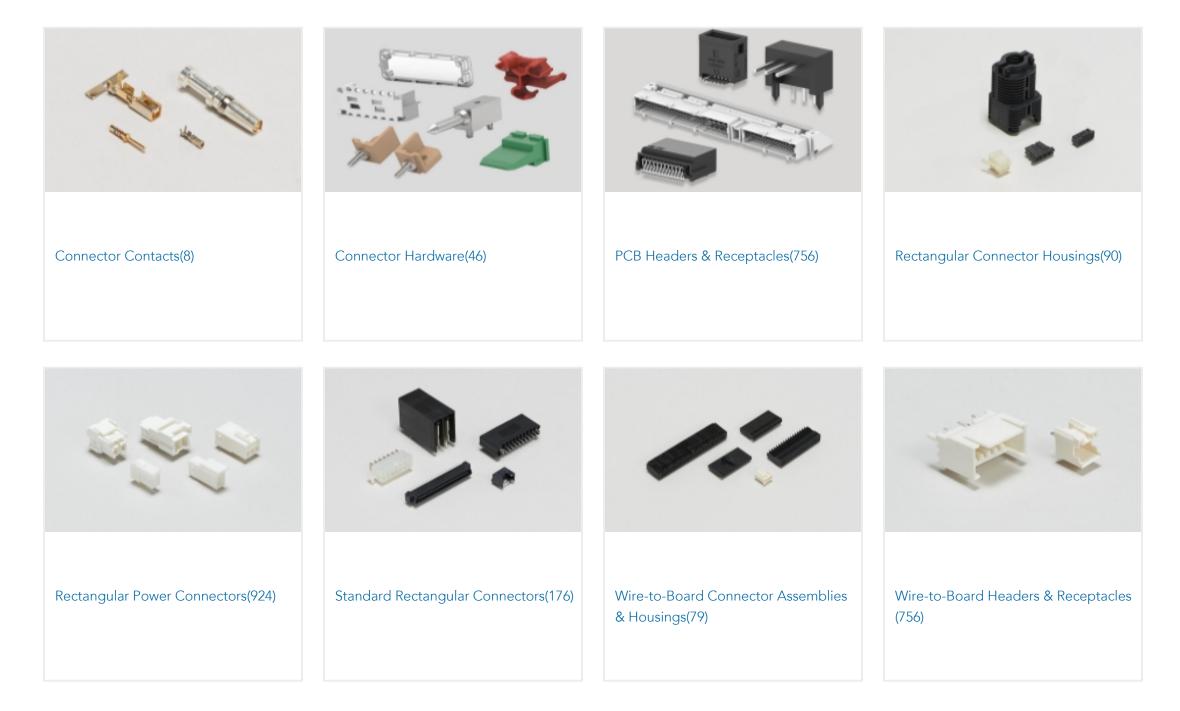

Customers Also Bought




AMP MINI D/R HDR HSG 26P NATU

REC ASSY FOR MINI CT HYBIRD DR

MINI CT SGL RELAY 17P BLACK

CT RELAY HDR ASSY FREE HANGING



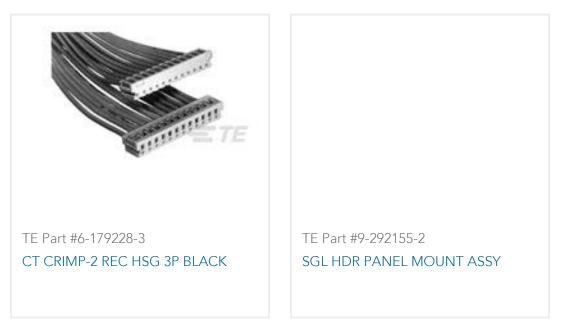

Documents

C For support call+1 800 522 6752

Connector Assembly, Plug to Plug Relay Header, Wire-to-Board / Wire-to-Wire, 5 Position, 2 mm [.078 in] Centerline, 1 Row, White, Signal, AMP CT



Product Drawings CT RELAY HDR ASSY FREE HANGING English **CAD** Files 3D PDF **Customer View Model** ENG_CVM_CVM_292156-6_A.2d_dxf.zip English **Customer View Model** ENG_CVM_CVM_292156-6_A.3d_igs.zip English **Customer View Model** ENG_CVM_CVM_292156-6_A.3d_stp.zip English By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Product Specifications

Product Specification

English

3D

AMP COMMON TERMINATION (CT), CONNECTOR, 2mm PITCH, M/T TYPE, LEAD FREE VERSION

Japanese

Product Specification

Japanese