3-1393303-4 - ACTIVE

#### Power Relay F

TE Internal #: 3-1393303-4 General Purpose Power Relay, DC, Monostable, 1 Form A (NO), 60 A Contact Rating, 12 VDC Coil Voltage, 12 VDC Contact Voltage, Power Relay F

View on TE.com >

Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: General Purpose Power Relay

Current Type: DC

Coil Magnetic System: Monostable

Contact Arrangement: 1 Form A (NO)

Contact Current Rating: 60 A

#### Features

#### Product Type Features

Relay & Contactor Type

#### **Configuration Features**

Contact Arrangement

General Purpose Power Relay

1 Form A (NO)



#### **Electrical Characteristics**

Contact Switching Load (Min)	1000mA @ 5VDC
Contact Limiting Short-Time Current	240 A
Contact Limiting Making Current	120 A
Coil Resistance	90 Ω
Contact Limiting Continuous Current	60 A
Contact Limiting Breaking Current	60 A
Insulation Initial Dielectric Between Open Contacts	500 Vrms
Contact Current Rating	60 A
Coil Voltage Rating	12 VDC
Contact Voltage Rating	12 VDC
Coil Power Rating DC	1.6 W
Insulation Initial Dielectric Between Contacts & Coil	500 Vrms
Body Features	
Product Weight	35 g[1.2 oz]

General Purpose Power Relay, DC, Monostable, 1 Form A (NO), 60 A Contact Rating, 12 VDC Coil Voltage, 12 VDC Contact Voltage, Power Relay F



Enclosure Type	Dust Protected
Contact Features	
Contact Material	Silver Alloy
Termination Features	
Main Termination & Connection Type	Quick Connect Terminals
Coil Termination & Connection Type	Quick Connect Terminals
Mechanical Attachment	
Product Mounting Feature Type	Mounting Brackets
Product Mount Type	Socket Mount
Dimensions	
Product Width	25.9 mm[1.02 in]
Product Length	25.9 mm[1.02 in]
Product Height	24.9 mm[.98 in]
Usage Conditions	
Environmental Category of Protection	RTI
Environmental Ambient Temperature (Max)	125 °C[257 °F]

### **Operation/Application**

Current Type	DC
Coil Magnetic System	Monostable
Other	
Contact Current Class	30 – 50 A
Environmental Ambient Temperature Class	105 – 125 °C
Height Class (Mechanical)	20 – 25 mm
Length Class (Mechanical)	25 – 30 mm
Width Class (Mechanical)	25 – 30 mm

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	

General Purpose Power Relay, DC, Monostable, 1 Form A (NO), 60 A Contact Rating, 12 VDC Coil Voltage, 12 VDC Contact Voltage, Power Relay F



Current ECHA Candidate List: JAN 2025 (247)Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

#### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**






# Also in the Series | Power Relay F



## **Customers Also Bought**

General Purpose Power Relay, DC, Monostable, 1 Form A (NO), 60 A Contact Rating, 12 VDC Coil Voltage, 12 VDC Contact Voltage, Power Relay F



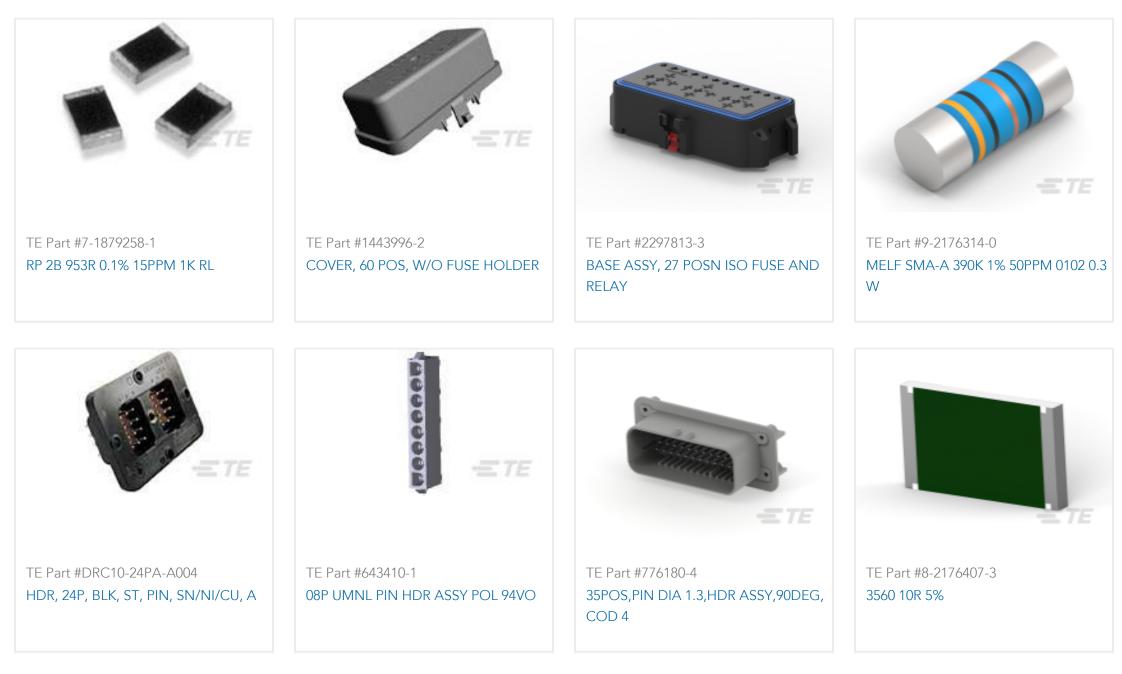



### Documents

**CAD** Files

3D PDF

English

Customer View Model

ENG\_CVM\_3-1393303-4\_S00F.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_3-1393303-4\_S00F.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_3-1393303-4\_S00F.2d\_dxf.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Automotive Relay Application Notes

English

**Product Specifications** 

**&** For support call+1 800 522 6752

General Purpose Power Relay, DC, Monostable, 1 Form A (NO), 60 A Contact Rating, 12 VDC Coil Voltage, 12 VDC Contact Voltage, Power Relay F



Definitions General Purpose Relays

English