




Connectors > Terminal Blocks & Strips > Barrier Strips

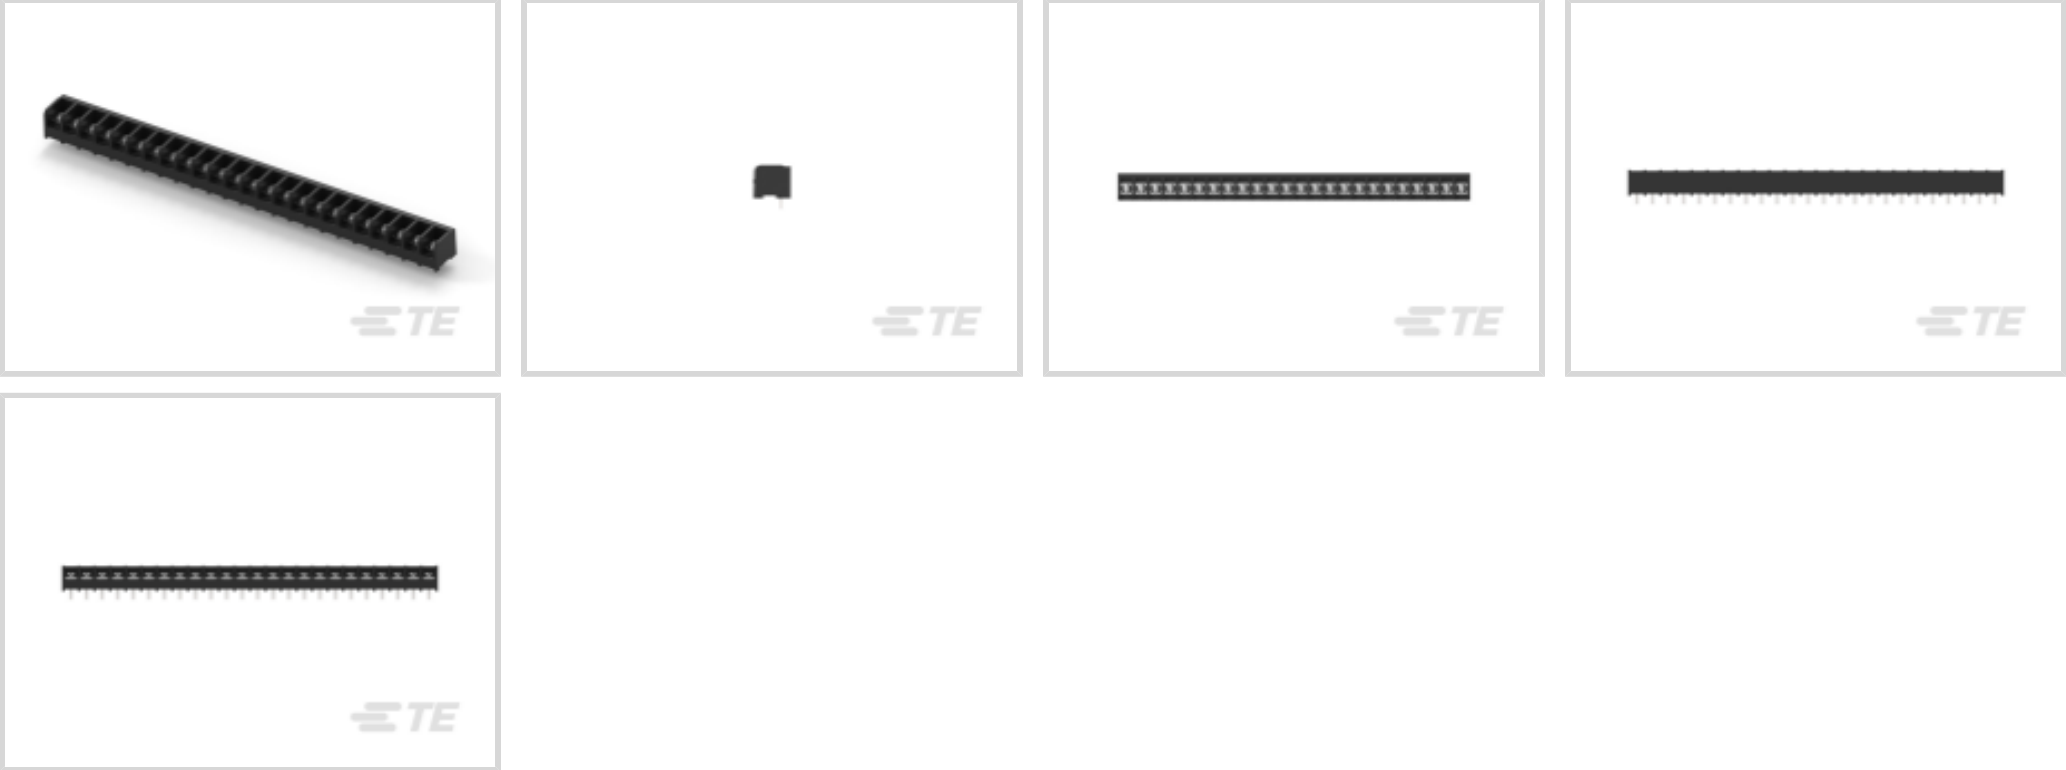

Number of Positions: 24

Barrier Strip Style: Tri-Barrier

Bottom Termination Type: Printed Circuit Pin

Connector System: Wire-to-Board

Centerline (Pitch): 9.53 mm [.375 in]

Features

Product Type Features

|                                   |                            |
|-----------------------------------|----------------------------|
| Block Style                       | Flat Bottom with standoffs |
| Connector System                  | Wire-to-Board              |
| Connector & Contact Terminates To | Printed Circuit Board      |

Configuration Features

|                     |    |
|---------------------|----|
| Number of Levels    | 1  |
| Number of Positions | 24 |
| Number of Rows      | 1  |

Electrical Characteristics

|                   |              |
|-------------------|--------------|
| Operating Voltage | 300 V, 600 V |
|-------------------|--------------|

Body Features

|                       |             |
|-----------------------|-------------|
| Primary Product Color | Black       |
| Product Orientation   | Vertical    |
| Barrier Strip Style   | Tri-Barrier |



Contact Features

|                                               |              |
|-----------------------------------------------|--------------|
| Contact Base Material                         | Copper Alloy |
| PCB Contact Termination Area Plating Material | Tin          |
| Contact Current Rating (Max)                  | 5 A, 25 A    |

Termination Features

|                         |                     |
|-------------------------|---------------------|
| Bottom Termination Type | Printed Circuit Pin |
|-------------------------|---------------------|

Mechanical Attachment

|                         |                    |
|-------------------------|--------------------|
| Top Termination Type    | Binding Combo Head |
| Mounting Options        | None               |
| Screw Plating Material  | Zinc Chromate      |
| Screw Material          | Steel              |
| Thread Size             | 6-32               |
| Connector Mounting Type | Board Mount        |

Housing Features

|                    |                  |
|--------------------|------------------|
| Housing Material   | Thermoplastic    |
| Centerline (Pitch) | 9.53 mm[.375 in] |

Dimensions

|                |                     |
|----------------|---------------------|
| Product Length | 230.15 mm[9.061 in] |
| Wire Size      | 22 – 12 AWG         |

Operation/Application

|                     |       |
|---------------------|-------|
| Circuit Application | Power |
|---------------------|-------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |         |
|--------------------|---------|
| Packaging Method   | Package |
| Packaging Quantity | 35      |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                         |
|-----------------------------------------------|-----------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                               |
| EU ELV Directive 2000/53/EC                   | Compliant                               |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |



|                                        |                                                                                                                               |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                        | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability              | Wave solder capable to 265°C                                                                                                  |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought



TE Part #1318386-2  
025 16P PLUG HSG ASSY H-TYP

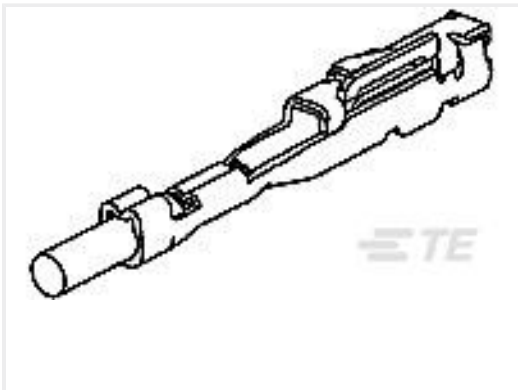

TE Part #1123343-1  
025 REC CONTACT



TE Part #CAT-C73765-M1E  
M12 Field Installable Unshielded



TE Part #1-534237-4  
16 MODII VRT SR CE 100/115



TE Part #6318790-1  
PLUG ASSY,PB-FREE,2.5 SLIM  
BATTERY OFF-S



TE Part #4-644020-0  
10P MTA100 CONN ASSY 30AU

Documents

Product Drawings  
6PCV-24-723=6PCV ASSEMBLY  
English



CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_3-1437654-8\_P.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_3-1437654-8\_P.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_3-1437654-8\_P.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Agency Approvals

UL

English