




Connectors > Lighting Connectors > Ballast Connectors > SlimSeal Miniature Plugs

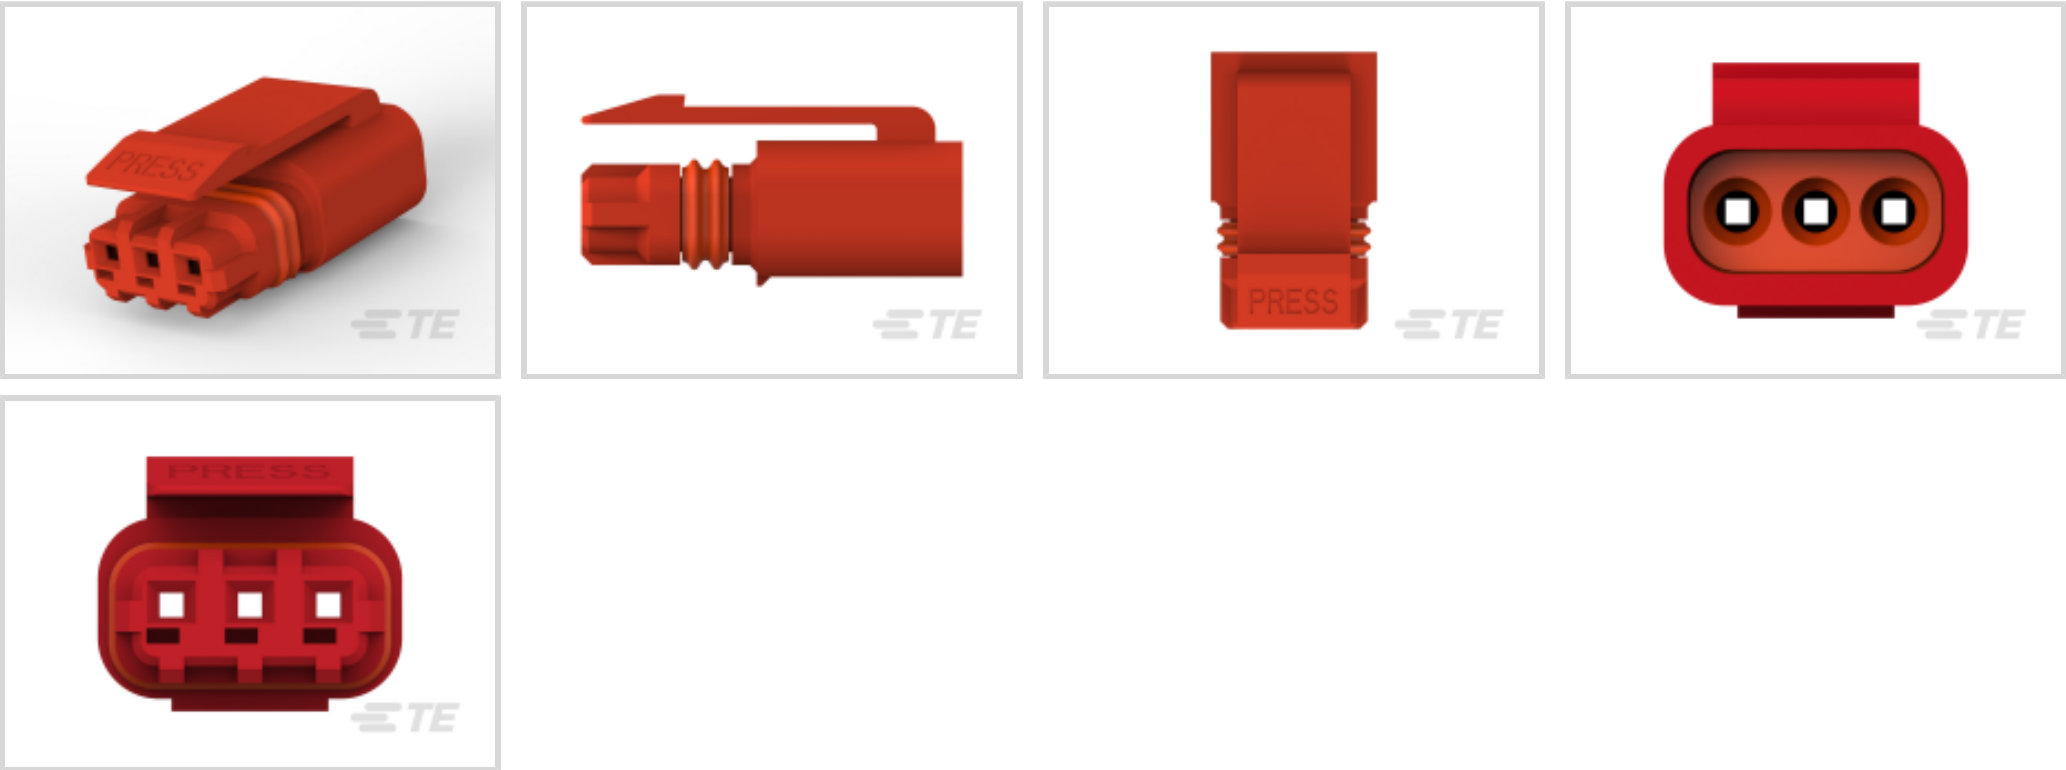

Number of Positions: 3

Lighting Product Type: **Connector**

Termination Method to Wire & Cable: **Crimp**

Connector System: **Wire-to-Wire**

Centerline (Pitch): 2.5 mm

[All SlimSeal Miniature Plugs \(11\)](#)

Features

Product Type Features

Lighting Product Type	Connector
Connector System	Wire-to-Wire
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Rows	1
Number of Positions	3

Electrical Characteristics

Operating Voltage (Max)	400 VAC
-------------------------	---------

Contact Features

Contact Current Rating (Max)	5 A
------------------------------	-----

Termination Features



Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Mating Alignment	With
------------------	------

Housing Features

Centerline (Pitch)	2.5 mm
--------------------	--------

Dimensions

Wire Size	18 – 22 AWG
-----------	-------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL 1977

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts



TE Part # 3-2834075-3
3P REC, MINIATURE WATERPROOF CONN.RED




TE Part # 1-2834067-2
SOCKET CONTACT,MINIATURE WATERPROOF CONN




TE Part # 1-2834067-3
SOCKET CONTACT,MINIATURE WATERPROOF CONN

Also in the Series | SlimSeal Miniature Connectors

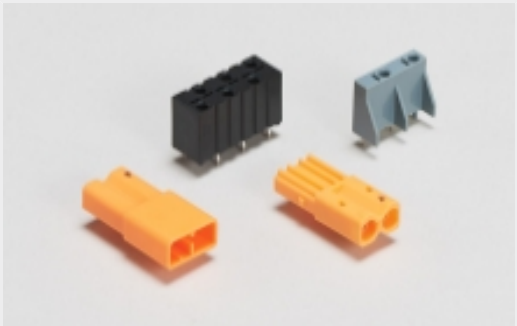

Ballast Connectors(36)

Customers Also Bought

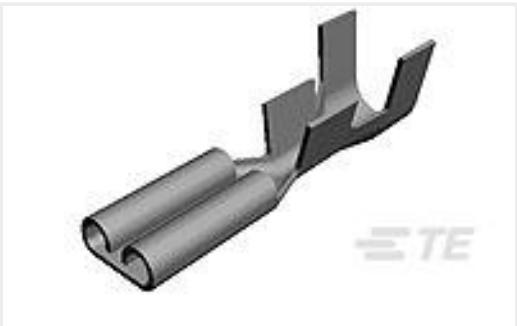

TE Part #60635-1
250 FASTON REC 14-10 AWG TPBR



TE Part #1-2834068-2
PIN CONTACT,MINIATURE WATERPROOF CONN




TE Part #207017-1
METRIMATE PLUG, 12 POS



TE Part #66098-7
III+ PIN,18-16,TIN-LEAD,STRIP




TE Part #770029-1
12P UMNLI IN-LINE CAP HSG KIT

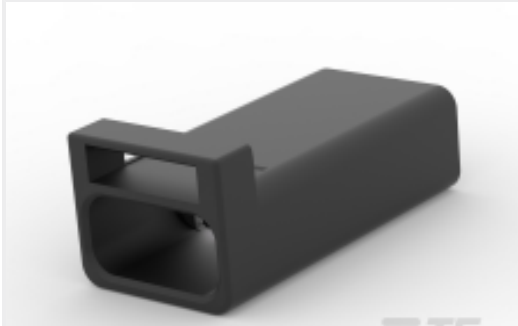

TE Part #2-2834075-2
2P REC, MINIATURE WATERPROOF CONN.BLACK



TE Part #34132
SPLICE,PG PARA 22-16

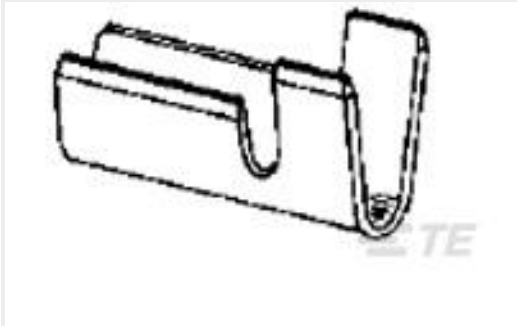

TE Part #925553-1
AM WIRE PIN 17-13 .013 BR



Documents

Product Drawings

[3P PLUG, MINIATURE WATERPROOF CONN,RED](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_3-2834074-3_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-2834074-3_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-2834074-3_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SlimSeal Connector Miniature Series](#)

English

[SlimSeal Connector Miniature Series](#)

[SlimSeal MiniSeal connector flyer \(Chinese\)](#)

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English

Agency Approvals

[UL Report](#)

English

3-2834074-3

3 Position Ballast Connector, Connector, Crimp, Wire-to-Wire, 2.5 mm Centerline, Sealable, Wire & Cable, 18 – 22 AWG, SlimSeal Miniature Connectors

