3-5174682-7 ACTIVE

AMPLIMITE | AMPLIMITE 0.50 Series

TE Internal #: 3-5174682-7


68 Position D-Shaped Connector, Receptacle, Cable-to-Board, Board Mount, 1.27 mm [.05 in] Centerline, Printed Circuit Board,

AMPLIMITE 0.50 Series

View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Receptacle Assembly: Right Angle, 1.27mm

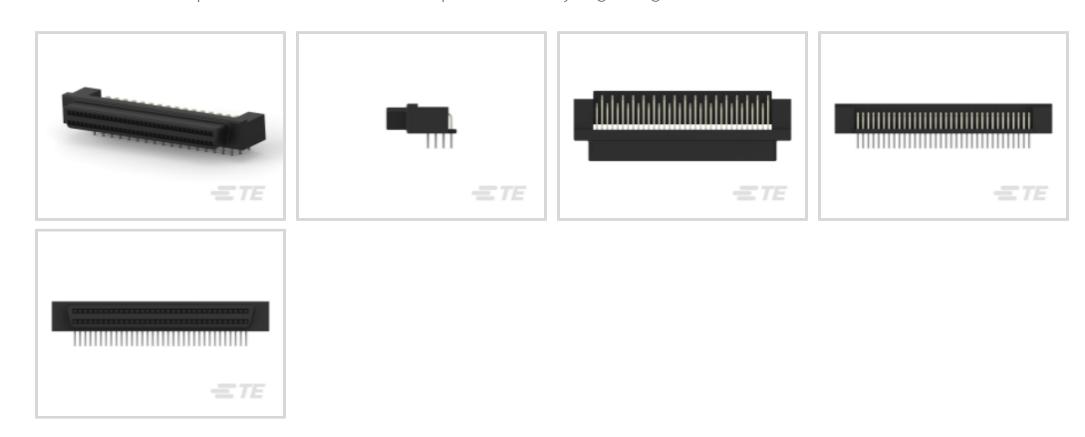

Number of Positions: 68

Connector & Housing Type: Receptacle Connector System: Cable-to-Board Connector Mounting Type: Board Mount

Centerline (Pitch): 1.27 mm [.05 in]

All D-Sub Receptacle Assembly: Right Angle, 1.27mm (74)

Features

Product Type Features

Shell Material Configuration	All Plastic
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Right Angle
Number of Rows	4
Number of Positions	68
Body Features	
Primary Product Color	Black

Standard

Connector Profile



Cantant Mating a Anna Diating a Matanial Thickness	7/
Contact Mating Area Plating Material Thickness	.76 μm
Contact Shape & Form	Square
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin, Tin over Nickel
Contact Current Rating (Max)	1 A
Contact Options	Installed
Termination Features	
Rectangular Termination Post & Tail Width	.45 mm[.017 in]
Rectangular Termination Post & Tail Thickness	.4 mm[.015 in]
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	3.6 mm[.142 in]
Mechanical Attachment	
PCB Mount Retention	With
Mating Retention	Without
PCB Mount Retention Type	Retention Solder Tails
Mating Alignment	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	1.27 mm[.05 in]
Dimensions	
Row-to-Row Spacing	2.54 mm[.1 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Shielded	No
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0

Packaging Features



Packaging Quantity	72
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | AMPLIMITE 0.50 Series



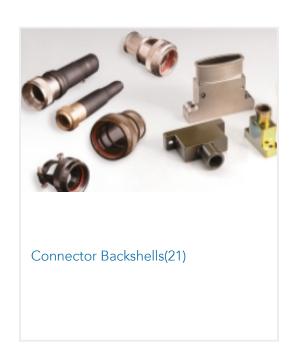





IDC D-Sub Connectors(69) Insertion & Extraction Tools(1)








Customers Also Bought







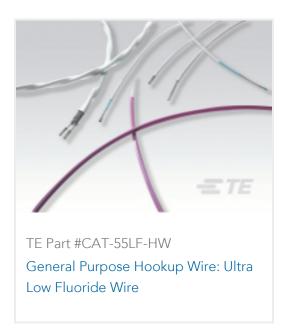









Documents

Product Drawings

AMPLIMITE.050 PLUG ASS'Y (H) 68P PB-FREE

Japanese

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_3-5174682-7_A.2d_dxf.zip



English

Customer View Model

ENG_CVM_CVM_3-5174682-7_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-5174682-7_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English