


Z-PACK | Z-PACK 2mm HM

TE Internal #: 3-5646547-0 Hard Metric Backplane PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 5 Row, Traditional Backplane, 125 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM

View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors >



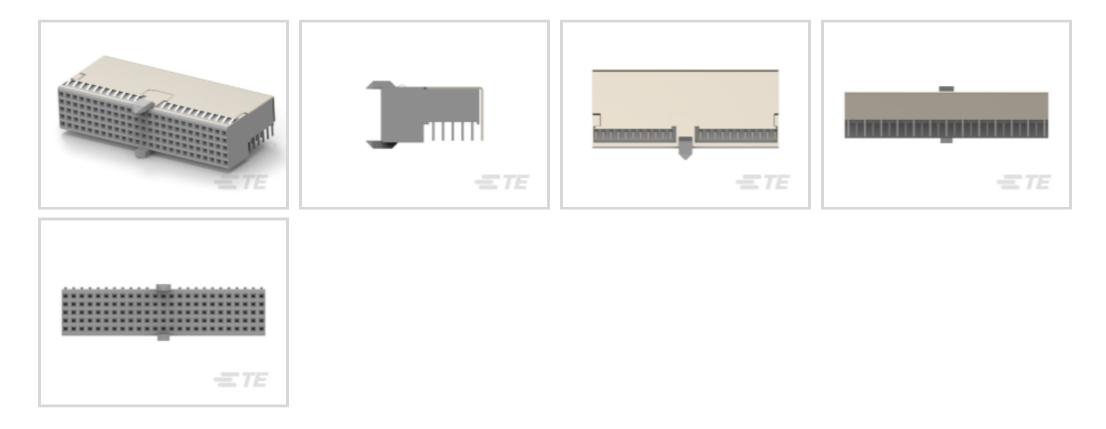

PCB Connector Type: PCB Mount Receptacle

Data Rate: **≤1 Gb/s**

Number of Columns: 25

Number of Rows: 5

Backplane Architecture: Traditional Backplane

All Hard Metric Backplane Receptacle Connector: Mezzanine, 2mm (27)



Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board			
Connector System	Board-to-Board			
PCB Connector Type	PCB Mount Receptacle			
Sealable	No			
Configuration Features				
Number of Columns	25			
Number of Rows	5			
Backplane Architecture	Traditional Backplane			
Number of Positions	125			
PCB Mount Orientation	Right Angle			
Signal Characteristics				
Data Rate	≤1 Gb/s			

C For support call+1 800 522 6752

Hard Metric Backplane PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 5 Row, Traditional Backplane, 125 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Body Features	
Primary Product Color	Gray
Contact Features	
CompactPCI Designation	None
Contact Type	Socket
Contact Mating Area Plating Material	Gold (Au)
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Mechanical Attachment	
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	2 mm[.078 in]
Jsage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	

Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not reviewed for solder process capability	

Product Compliance Disclaimer

Hard Metric Backplane PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 5 Row, Traditional Backplane, 125 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series Z-PACK 2mm HM




	*		
Board-to-Board Headers & Receptacles(46)	Connector Contacts(2)	Connector Hardware(91)	Hard Metric Backplane Connectors (266)

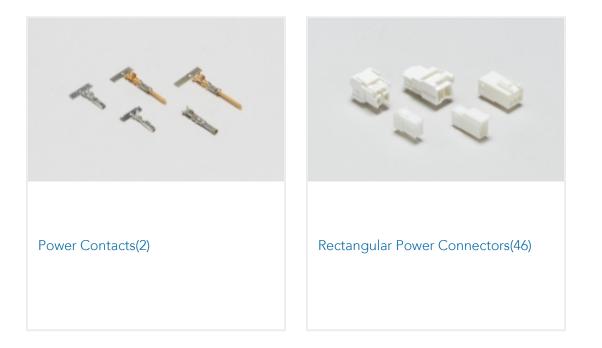

Customers Also Bought

Hard Metric Backplane PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 5 Row, Traditional Backplane, 125 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



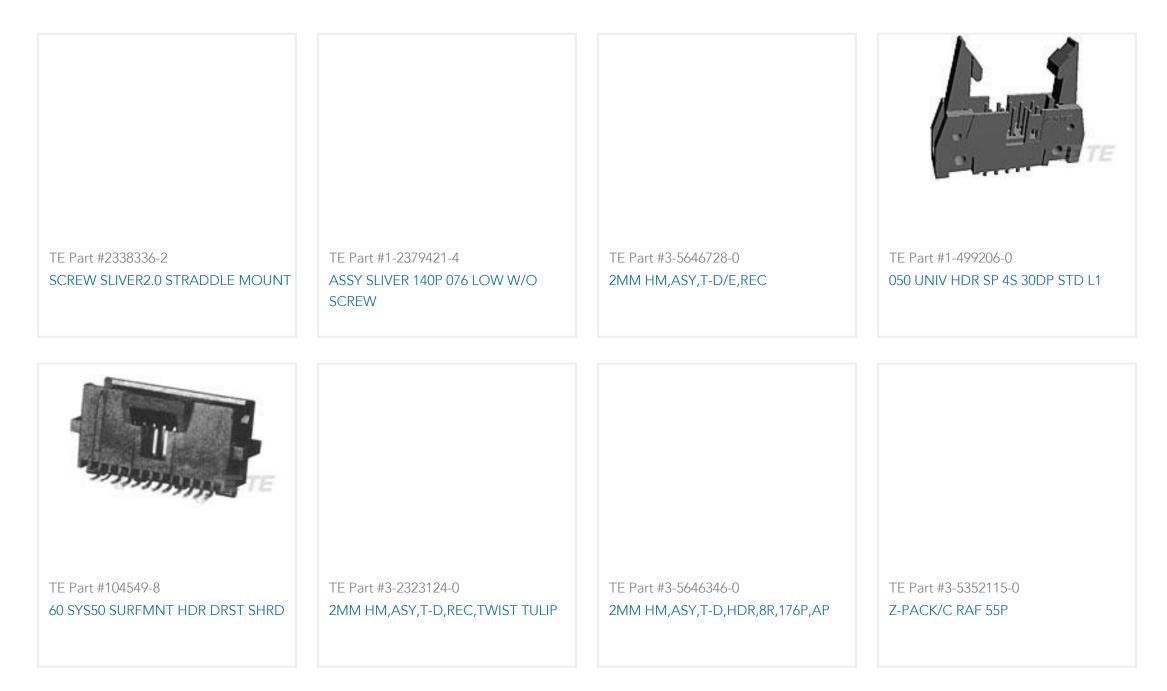



Documents

Product Drawings Z-PACK A-B 25 COLUMN SHLD ASSY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-5646547-0_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-5646547-0_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-5646547-0_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

C For support call+1 800 522 6752

Hard Metric Backplane PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 5 Row, Traditional Backplane, 125 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Application Specification

English