

SOLISTRAND | SOLISTRAND Budget

TE Internal #: 30696 Closed Ring Tongue Terminal, 16 AWG, #8 / M4 Stud, 4.17 mm [. 164 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, SOLISTRAND Budget

View on TE.com >

Terminals & Splices > Ring Terminals



Ring Terminal Product Type: Closed Ring Tongue Terminal


Wire Size: 2050 – 5180 CMA

Stud Size: #8, M4

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#8, M4
Sealable	No
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Holes	1
Body Features	
Product Weight	.753 g
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	





30696

Closed Ring Tongue Terminal, 16 AWG, #8 / M4 Stud, 4.17 mm [.164 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, SOLISTRAND Budget



Wire Size	2050 – 5180 CMA
Stud Diameter	4.17 mm[.164 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	16.15 mm[.636 in]
Barrel Inside Diameter	2.26 mm[.089 in]
Usage Conditions	
Insulation Option	Uninsulated
Operation/Application	
Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	1000
Packaging Method	Loose Piece
Other	
Line	Budget

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability
Product Compliance Disclaimer	

30696

Closed Ring Tongue Terminal, 16 AWG, #8 / M4 Stud, 4.17 mm [.164 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, SOLISTRAND Budget





This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Also in the Series | SOLISTRAND Budget

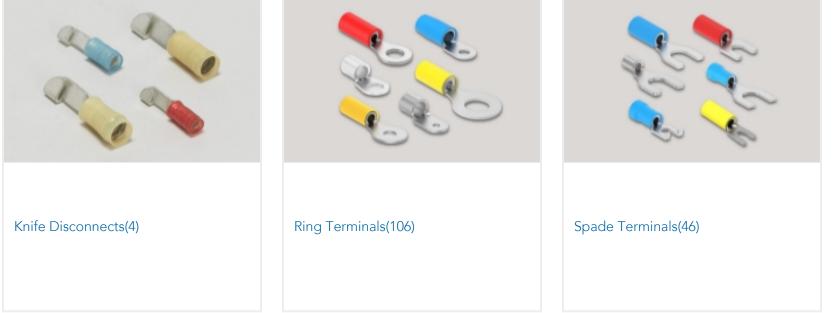

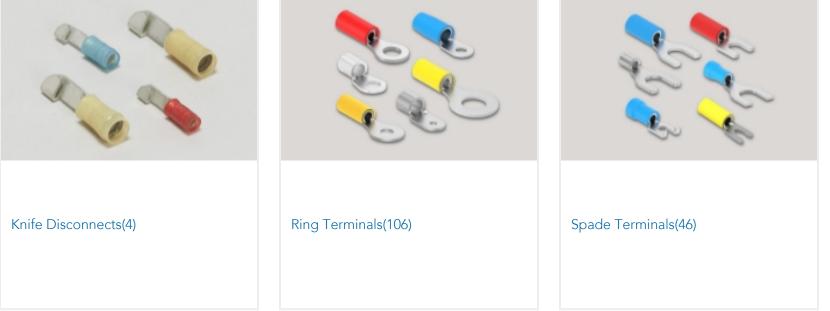


Customers Also Bought



30696

Closed Ring Tongue Terminal, 16 AWG, #8 / M4 Stud, 4.17 mm [.164 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, SOLISTRAND Budget



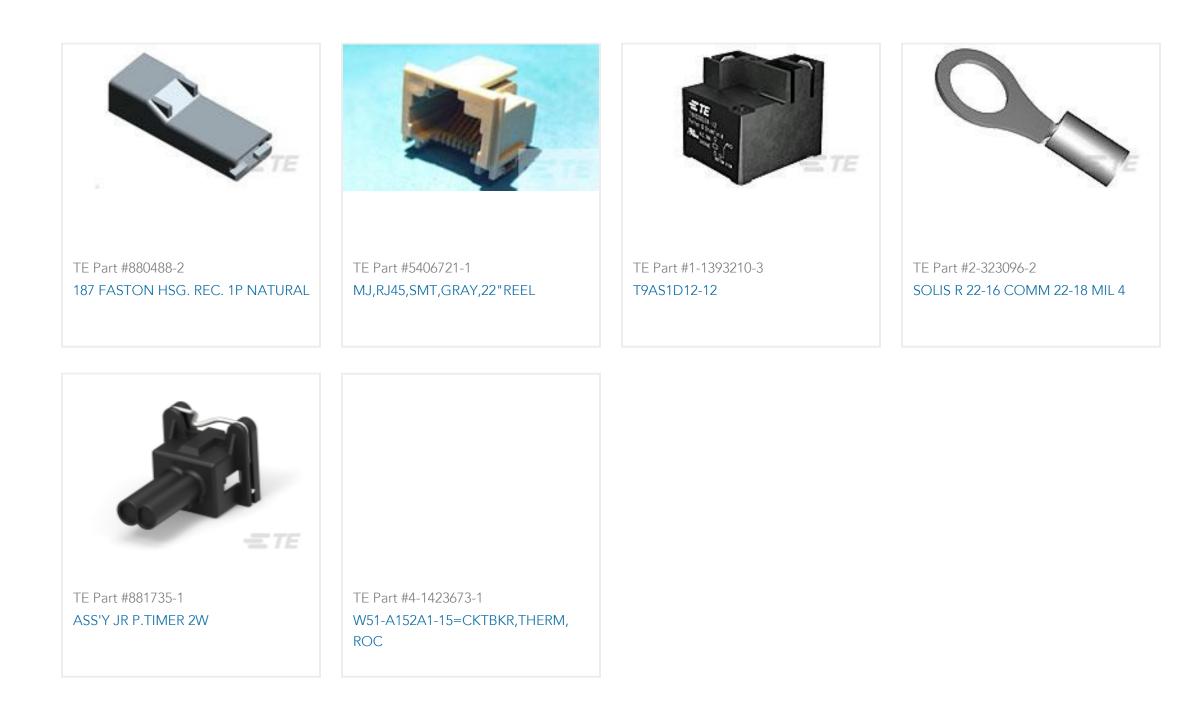

Documents

Product Drawings

TERMINAL, BUDG, RING, 16-14, 8

English

CAD Files 3D PDF

-

3D

Customer View Model ENG_CVM_CVM_30696_AF.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_30696_AF.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_30696_AF.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Agency Approvals UL Report

English