

SOLISTRAND

TE Internal #: 320764 Closed Ring Tongue Terminal, 12 – 10 AWG, 5/8 / M16 Stud, 16.66 mm [.656 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Uninsulated

View on TE.com >

Terminals & Splices > Ring Terminals



Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: 5/8, M16

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	5/8, M16
Sealable	No
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Holes	1
Body Features	
Product Weight	7.364 g
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	



Closed Ring Tongue Terminal, 12 – 10 AWG, 5/8 / M16 Stud, 16.66 mm [.656 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Uninsulated



Wire Size	5180 – 13100 CMA
Stud Diameter	16.66 mm[.656 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	48.16 mm[1.893 in]
Barrel Inside Diameter	3.28 mm[.129 in]
Usage Conditions	
Insulation Option	Uninsulated
Operation/Application	
Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	500
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

Closed Ring Tongue Terminal, 12 – 10 AWG, 5/8 / M16 Stud, 16.66 mm [.656 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Uninsulated



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

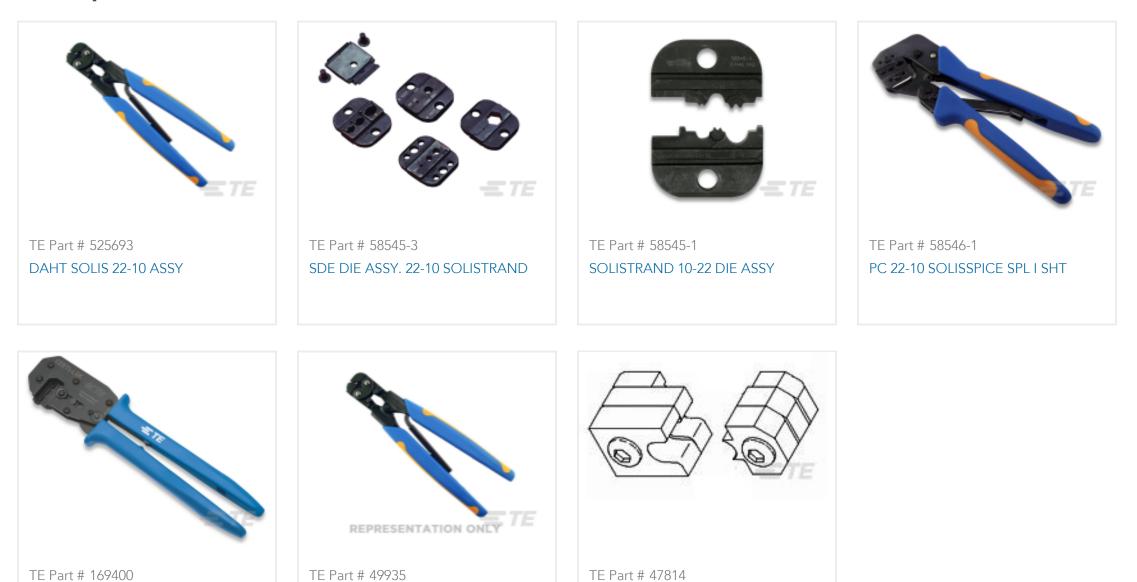


DIES SOLIS 12-10 DIE SET

DAHT SOLIS 22-10 ASSY


Customers Also Bought

CERTI-LOK FRAME W/O DIES

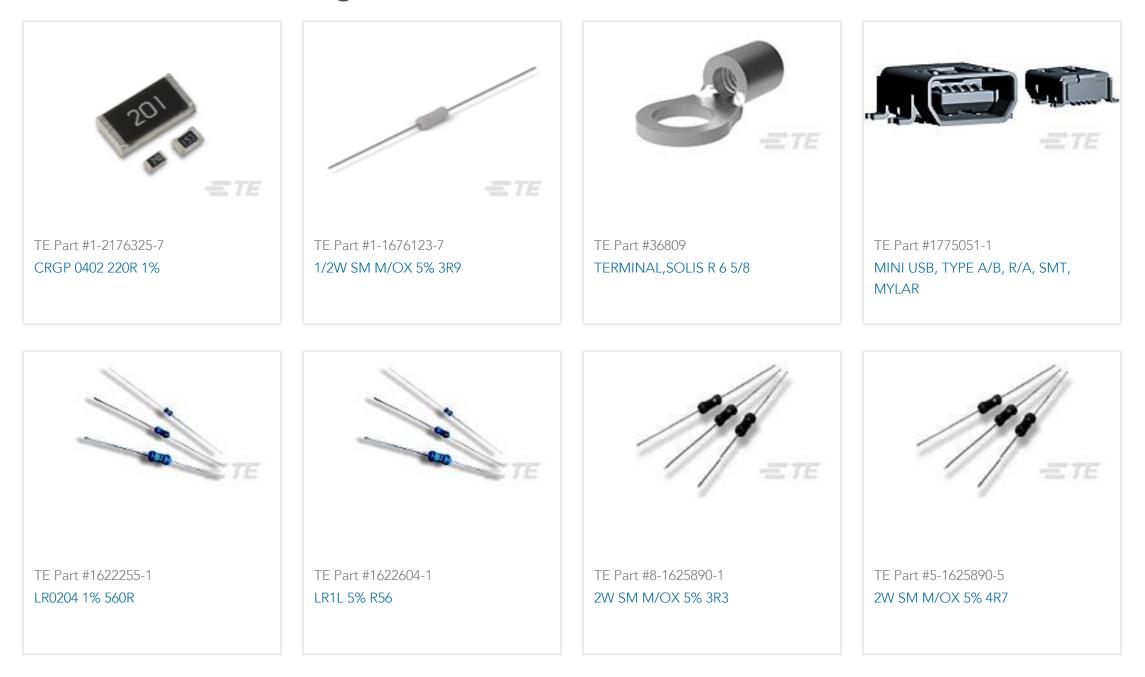

Closed Ring Tongue Terminal, 12 – 10 AWG, 5/8 / M16 Stud, 16.66 mm [.656 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Uninsulated



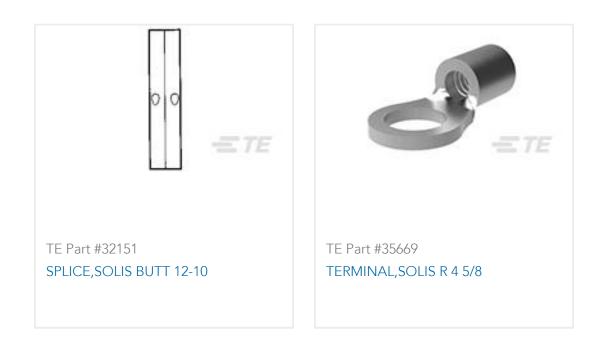

Documents

Product Drawings TERMINAL, SOLIS R 12-10 5/8

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_320764_S.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_320764_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_320764_S.3d_stp.zip

English

Customer View Model

ENG_CVM_320764_C.3d_igs.zip

English

Customer View Model

ENG_CVM_320764_C.3d_stp.zip

English

Customer View Model

ENG_CVM_320764_C.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Instruction Sheets Instruction Sheet (U.S.) English Agency Approvals UL English

C For support call+1 800 522 6752

Closed Ring Tongue Terminal, 12 – 10 AWG, 5/8 / M16 Stud, 16.66 mm [.656 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Uninsulated

