


# SOLISTRAND

TE Internal #: 321198 Butt Splice, 26 – 22 AWG, .1 – .41 mm<sup>2</sup> Wire, Serrated, 202 – 810 CMA, Copper, 5 Serration, 9.78 mm [.385 in] Length, Loose Piece, Closed Barrel

### View on TE.com >

Terminals & Splices > Splices

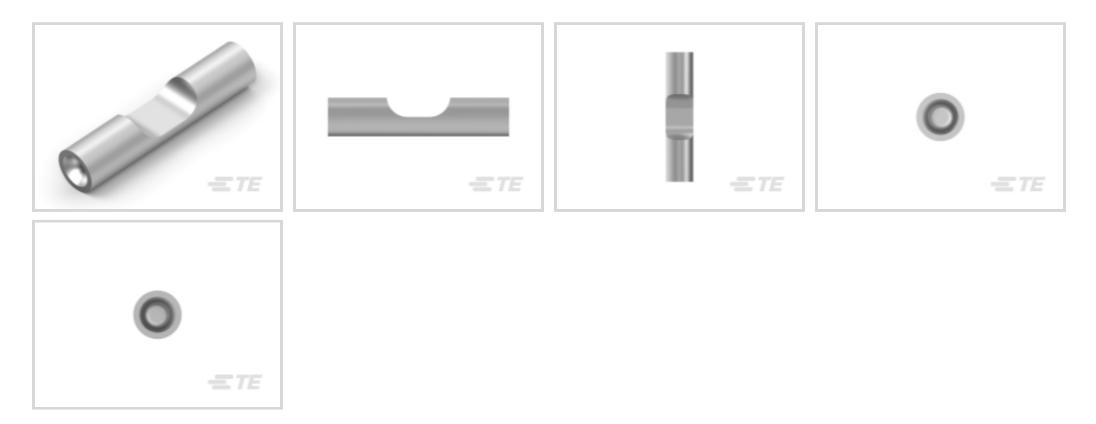

Splice Type: Butt Splice

Wire Size: .1 – .41 mm<sup>2</sup>

Sealable: No

Splice Features: Serrated

# Features

# Product Type Features



Splice Accessory Type	Splice
Splice Type	Butt Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Serrations	5
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Product Weight	.144 g
Splice Features	Serrated
Contact Features	
	100 µin
Terminal Plating Material	Tin

# 321198

Butt Splice, 26 – 22 AWG, .1 – .41 mm<sup>2</sup> Wire, Serrated, 202 – 810 CMA, Copper, 5 Serration, 9.78 mm [.385 in] Length, Loose Piece, Closed Barrel



Contact Base Material	Copper
Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	
Outside Diameter	2.08 mm[.082 in]
Wire Size	202 – 810 CMA
Barrel Inside Diameter	.79 mm[.031 in]
Terminal Material Thickness	.46 mm[.018 in]
Product Length	9.78 mm[.385 in]
Usage Conditions	
Insulation Option	Uninsulated
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No

# Packaging Features

1000

Packaging Method

Loose Piece

# Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

# 321198


Butt Splice, 26 – 22 AWG, .1 – .41 mm<sup>2</sup> Wire, Serrated, 202 – 810 CMA, Copper, 5 Serration, 9.78 mm [.385 in] Length, Loose Piece, Closed Barrel



### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



# **Customers Also Bought**







# 321198

Butt Splice, 26 – 22 AWG, .1 – .41 mm<sup>2</sup> Wire, Serrated, 202 – 810 CMA, Copper, 5 Serration, 9.78 mm [.385 in] Length, Loose Piece, Closed Barrel





# Documents

# Product Drawings SPLICE, SOLIS BUTT 26-22

English

### **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_321198\_G.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_321198\_G.3d\_igs.zip

English

Customer View Model

# ENG\_CVM\_CVM\_321198\_G.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOLISTRAND - QRG

English

Agency Approvals

UL Report

English