

SOLISTRAND

TE Internal #: 321280 Butt Splice, 14 – 12 AWG, 2 – 3 mm² Wire, Serrated, 3.26 – 8.23 kcmil, 3260 – 8230 CMA, Copper, 17.53 mm [.69 in] Length, Loose Piece, Closed Barrel

View on TE.com >

Terminals & Splices > Splices



Splice Type: Butt Splice

Wire Size: 2–3 mm²

Sealable: No

Splice Features: Serrated

Features

Product Type Features



2	

Splice Accessory Type	Splice
Splice Type	Butt Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Body Features Product Weight	1.249 g
-	1.249 g Serrated
Product Weight	
Product Weight Splice Features	
Product Weight Splice Features	Serrated
Product Weight Splice Features Contact Features	Serrated 100 µin

321280

Butt Splice, 14 – 12 AWG, 2 – 3 mm² Wire, Serrated, 3.26 – 8.23 kcmil, 3260 – 8230 CMA, Copper, 17.53 mm [.69 in] Length, Loose Piece, Closed Barrel



Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	
Outside Diameter	4.52 mm[.178 in]
Wire Size	3.26 – 8.23 kcmil
Barrel Inside Diameter	2.49 mm[.098 in]
Terminal Material Thickness	.84 mm[.033 in]
Product Length	17.53 mm[.69 in]
Usage Conditions	
Insulation Option	Uninsulated
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	1000

Packaging Method

Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

321280

Butt Splice, 14 – 12 AWG, 2 – 3 mm² Wire, Serrated, 3.26 – 8.23 kcmil, 3260 – 8230 CMA, Copper, 17.53 mm [.69 in] Length, Loose Piece, Closed Barrel





This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


Compatible Parts




Customers Also Bought

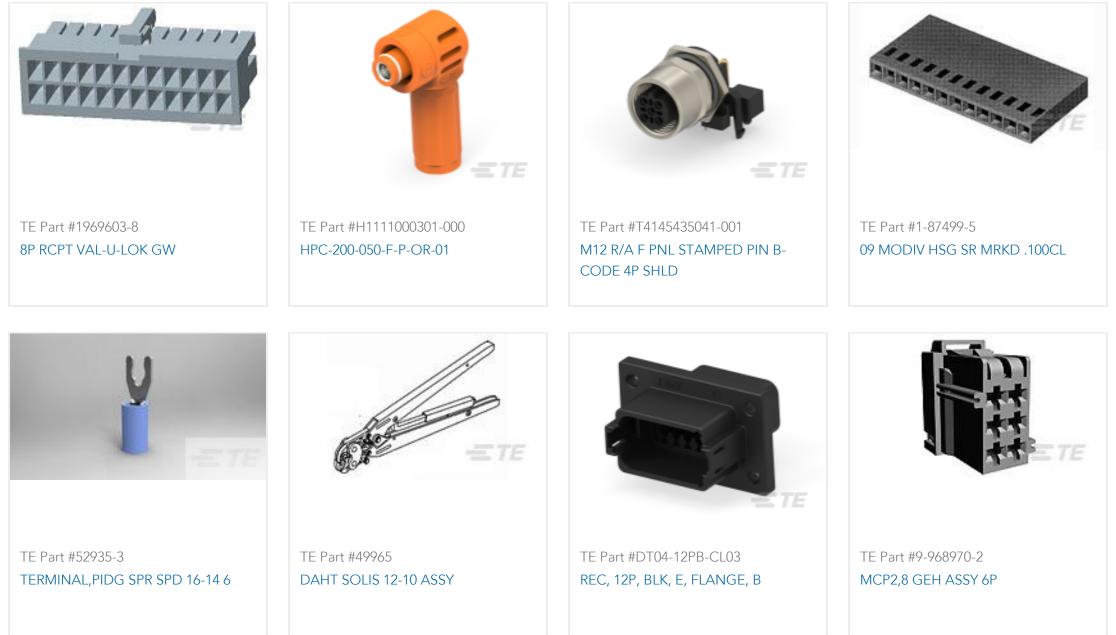

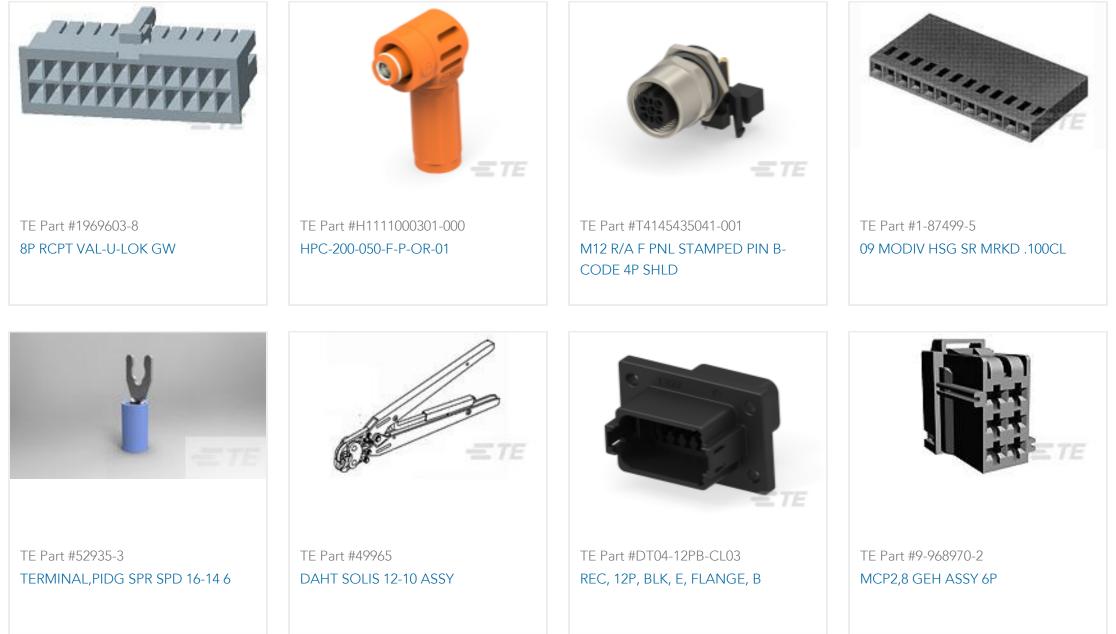

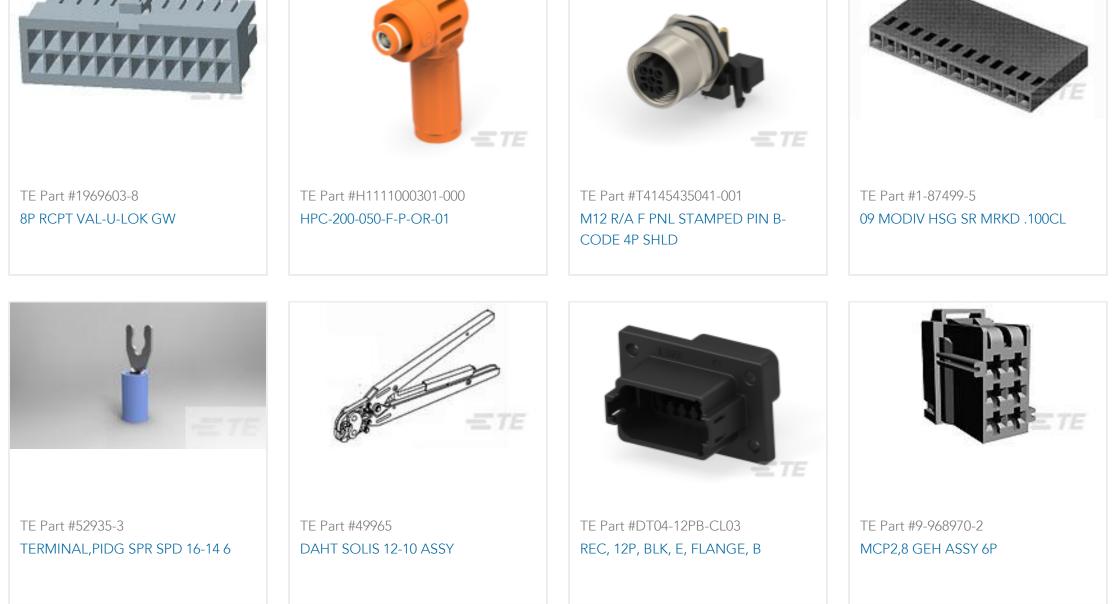

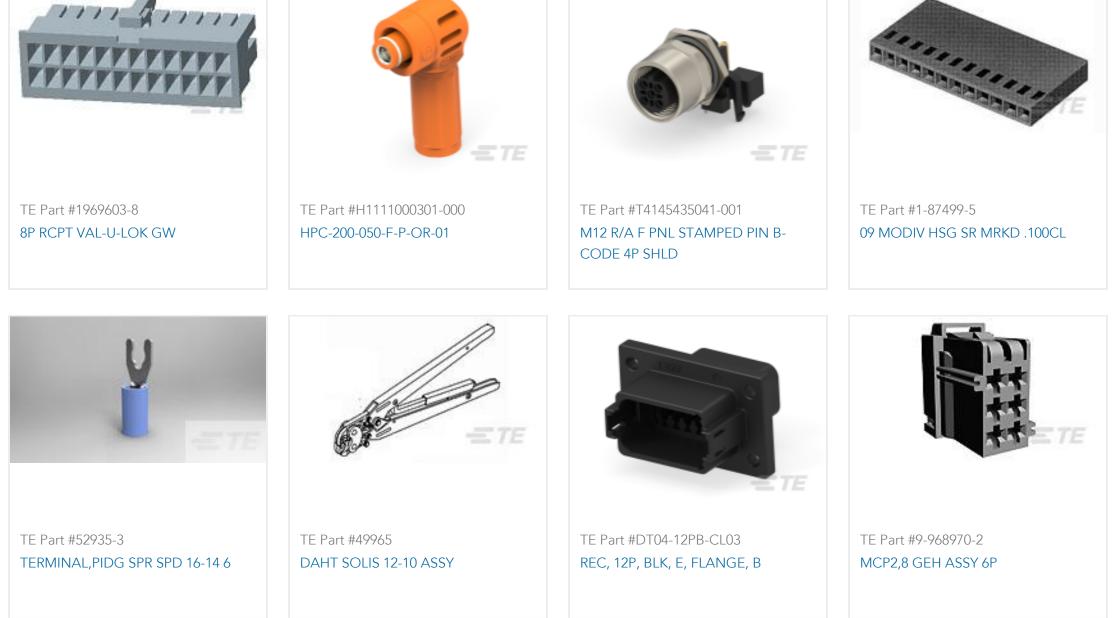

321280

Butt Splice, 14 – 12 AWG, 2 – 3 mm² Wire, Serrated, 3.26 – 8.23 kcmil, 3260 – 8230 CMA, Copper, 17.53 mm [.69 in] Length, Loose Piece, Closed Barrel





Documents

Product Drawings SPLICE, SOLIS BUTT 14-12

English

CAD Files

Customer View Model

ENG_CVM_321280_H.3d_igs.zip

English

Customer View Model

ENG_CVM_321280_H.3d_stp.zip

English

Customer View Model

ENG_CVM_321280_H.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English