


SOLISTRAND

TE Internal #: 32151 Butt Splice, 12 – 10 AWG, 2.62 – 6.64 mm² Wire, Serrated, 5180 – 13100 CMA, Copper, 6 Serration, 14.35 mm [.565 in] Length, Loose Piece, Closed Barrel

View on TE.com >

Terminals & Splices > Splices

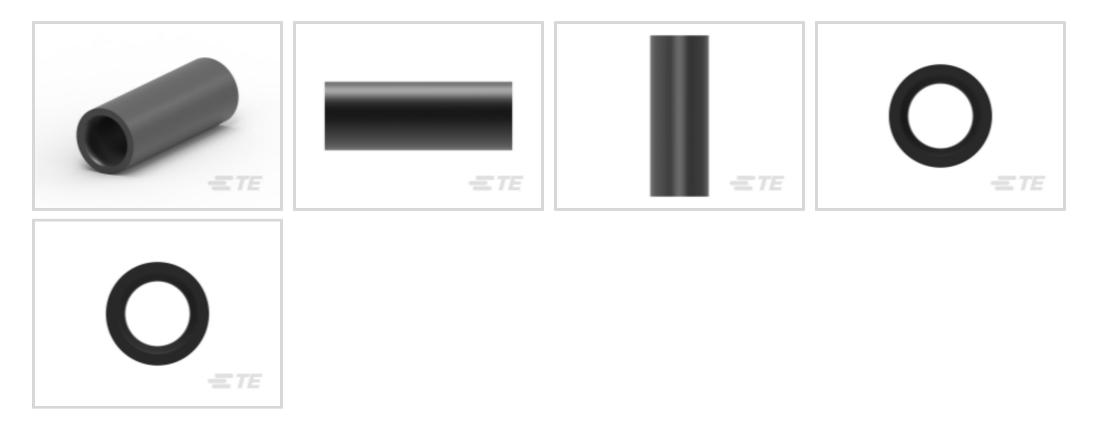

Splice Type: Butt Splice

Wire Size: 2.62 – 6.64 mm²

Sealable: No

Splice Features: Serrated

Features

Product Type Features



Splice Accessory Type	Splice
Splice Type	Butt Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Serrations	6
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Product Weight	2.259 g
Splice Features	Serrated
Contact Features	
	100 µin
Terminal Plating Material	Tin

Butt Splice, 12 – 10 AWG, 2.62 – 6.64 mm² Wire, Serrated, 5180 – 13100 CMA, Copper, 6 Serration, 14.35 mm [.565 in] Length, Loose Piece, Closed Barrel



Contact Base Material	Copper
Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	
Outside Diameter	5.74 mm[.226 in]
Wire Size	5180 – 13100 CMA
Barrel Inside Diameter	3.28 mm[.129 in]
Terminal Material Thickness	.99 mm[.039 in]
Product Length	14.35 mm[.565 in]
Usage Conditions	
Insulation Option	Uninsulated
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
De alca sin a Falaturas	

Packaging Features

Packaging Method

Loose Piece

500

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

C For support call+1 800 522 6752


Butt Splice, 12 – 10 AWG, 2.62 – 6.64 mm² Wire, Serrated, 5180 – 13100 CMA, Copper, 6 Serration, 14.35 mm [.565 in] Length, Loose Piece, Closed Barrel



Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

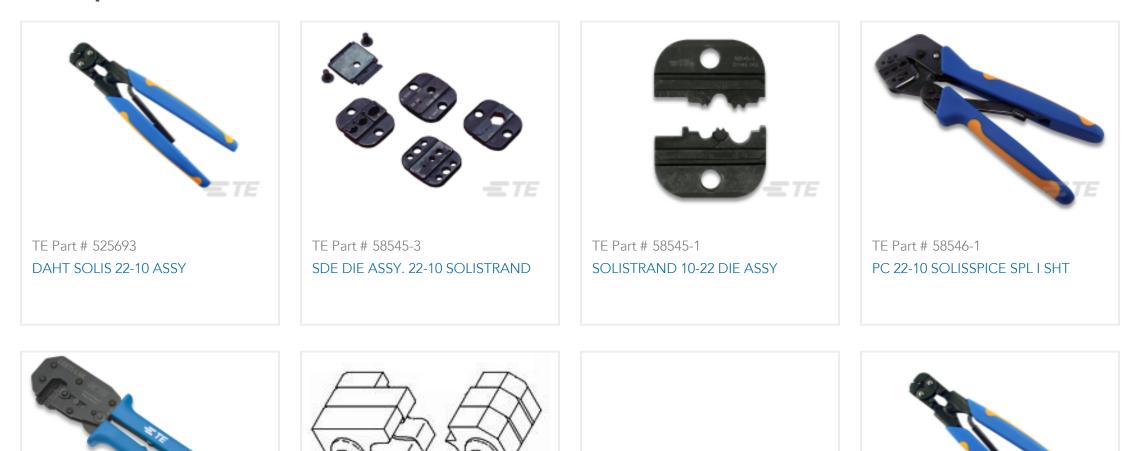




Customers Also Bought

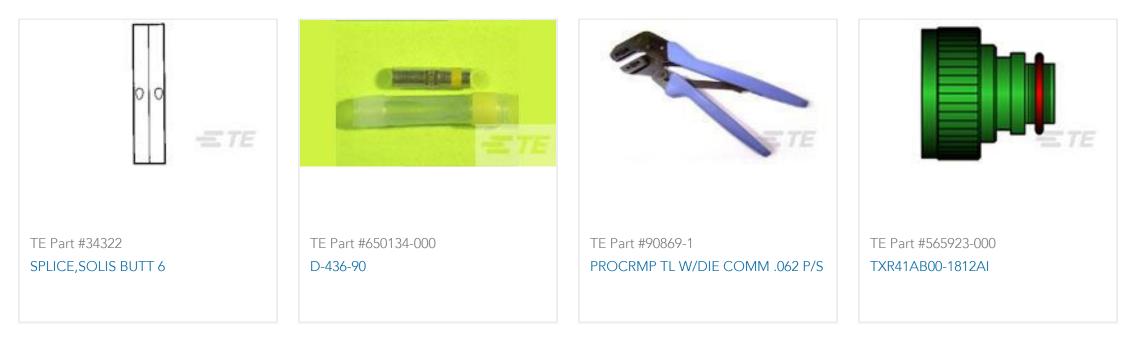

Butt Splice, 12 – 10 AWG, 2.62 – 6.64 mm² Wire, Serrated, 5180 – 13100 CMA, Copper, 6 Serration, 14.35 mm [.565 in] Length, Loose Piece, Closed Barrel



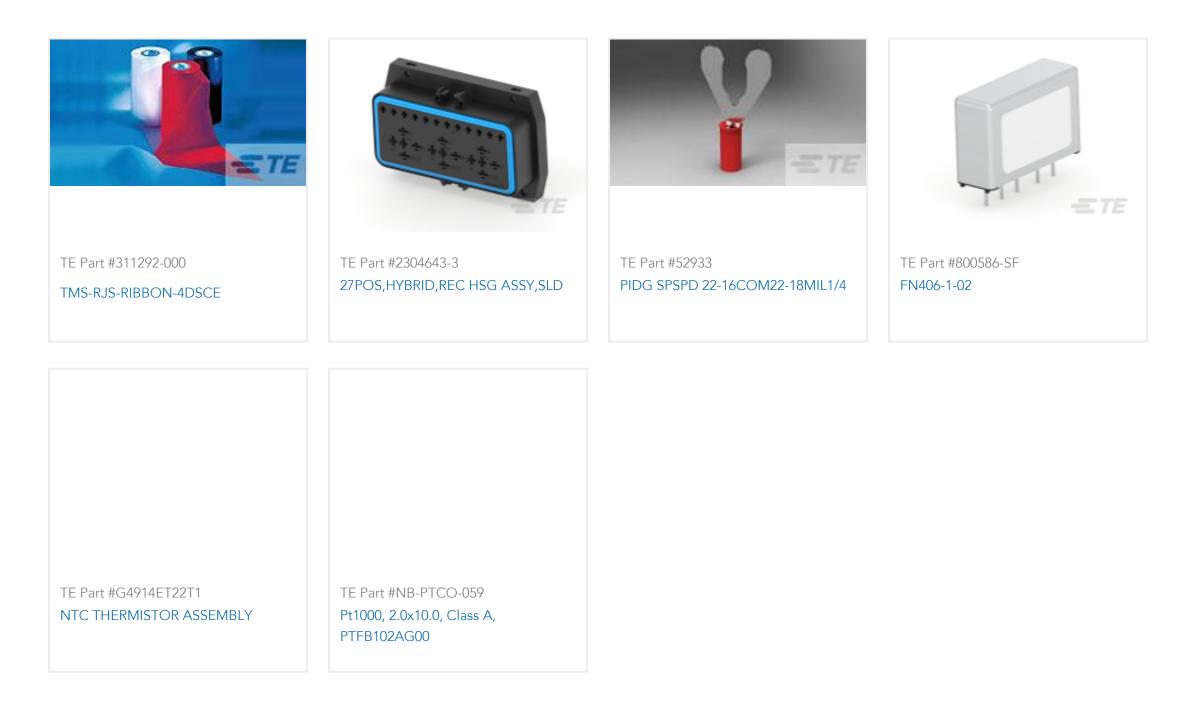

Documents

Product Drawings SPLICE, SOLIS BUTT 12-10

English

CAD Files Customer View Model ENG_CVM_CVM_32151_P.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_32151_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_32151_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOLISTRAND - QRG

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals UL

C For support call+1 800 522 6752

Butt Splice, 12 – 10 AWG, 2.62 – 6.64 mm² Wire, Serrated, 5180 – 13100 CMA, Copper, 6 Serration, 14.35 mm [.565 in] Length, Loose Piece, Closed Barrel



English