


### SOLISTRAND

TE Internal #: 321880 Closed Ring Tongue Terminal, 4/0 AWG, 1/2 Stud, 12.7 mm [.5 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Uninsulated

### View on TE.com >

Terminals & Splices > Ring Terminals

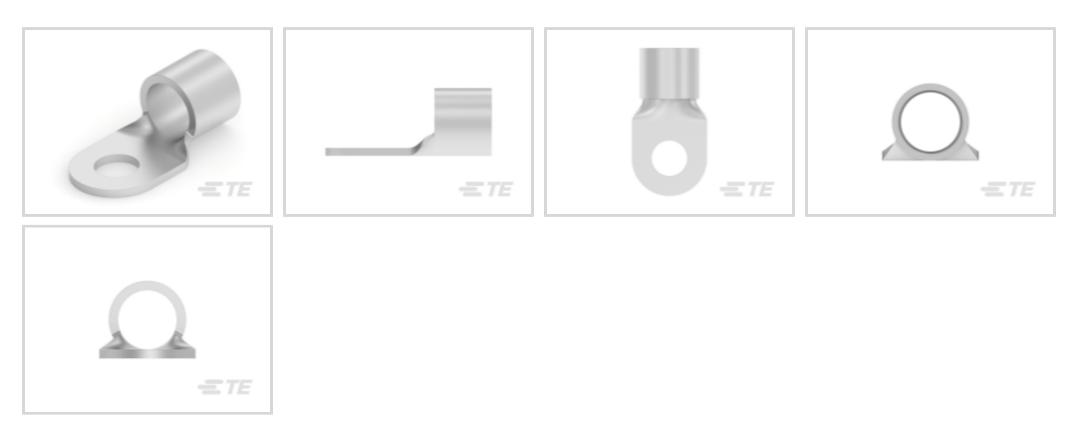

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: **190000 – 231100 CMA** 

Stud Size: 1/2

### Features

### Product Type Features

Ring Terminal Product Type

Closed Ring Tongue Terminal



Stud Size	1/2
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	2
Body Features	
Product Weight	46.252 g
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	

### 321880

Closed Ring Tongue Terminal, 4/0 AWG, 1/2 Stud, 12.7 mm [.5 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Uninsulated



Wire Size	190000 – 231100 CMA
Stud Diameter	12.7 mm[.5 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	55.32 mm[2.178 in]
Barrel Inside Diameter	16.13 mm[.635 in]
Usage Conditions	
Insulation Option	Uninsulated
Operation/Application	
Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	50
Packaging Method	Loose Piece

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

### 321880

Closed Ring Tongue Terminal, 4/0 AWG, 1/2 Stud, 12.7 mm [.5 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Uninsulated




numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# Compatible Parts





# Customers Also Bought

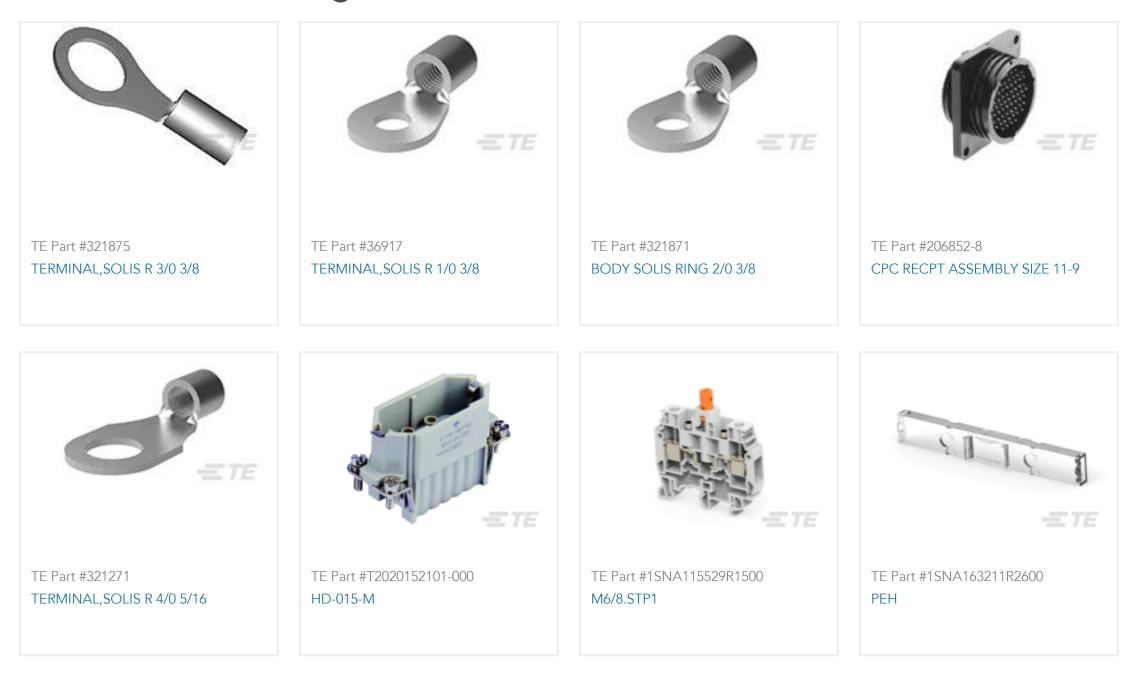

### 321880

Closed Ring Tongue Terminal, 4/0 AWG, 1/2 Stud, 12.7 mm [.5 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Uninsulated





## Documents

### Product Drawings TERMINAL,SOLIS R 4/0 1/2

English

### **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_321880\_T.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_321880\_T.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_321880\_T.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals

UL

English